


**LEGEND**

|                                  |                     |                         |                  |
|----------------------------------|---------------------|-------------------------|------------------|
| --- Federal Navigation Channel   | ● Cable Area        | □ Borrow Area           | ■ -15' and above |
| — Federal Navigation Center Line | □ Placement Area    | ● Shoalest Sounding**   | ■ -15' to -20'   |
| — As-built Pipeline/Cable        | □ Anchorage Area    | ☆ Beacon, General       | ■ -20' to -25'   |
| ..... Unconfirmed Pipeline/Cable | ⊗ Obstruction Point | ◆ Red Navigation Buoy   | ■ -25' to -32'   |
| — Project Depth Contour          | ✈ Wrecks-Submerged  | ◆ Green Navigation Buoy | ■ -32' to -38'   |
|                                  |                     |                         | ■ -38' to -40'   |
|                                  |                     |                         | ■ -40' to -42'   |
|                                  |                     |                         | ■ -42' and below |

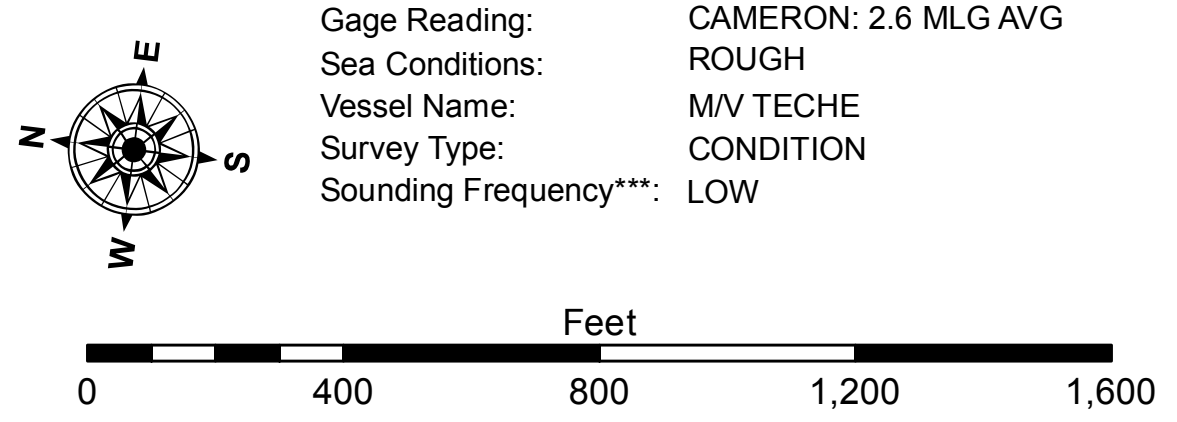

**NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).  
Datum Relationships for gage 73650 as of December 2013:  
0.0' NAVD83 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

2010 Aerial Photography data source: NAIP

Reference is N.O.A. Navigation Chart No. 11339.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



**DISCLAIMER**

The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not warranted for any purpose other than that for which they were prepared, and that the user is responsible for its use and accuracy. The user is responsible for its use and accuracy. The user is responsible for its use and accuracy. The user is responsible for its use and accuracy.

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT

|                                                   |                       |
|---------------------------------------------------|-----------------------|
| Submitted:                                        | Surveyed By:<br>SR,JH |
| Recommender:<br>Chief, Survey Section             | Plotted By:<br>AO     |
| Approver:<br>Chief, Waterways Maintenance Section | Checked By:<br>TF     |

**CALCASIEU SHIP CHANNEL**  
BAR SHEET 30  
CR\_30\_BAR\_20151216  
16 December 2015

Sheet Reference Number  
30 of 53