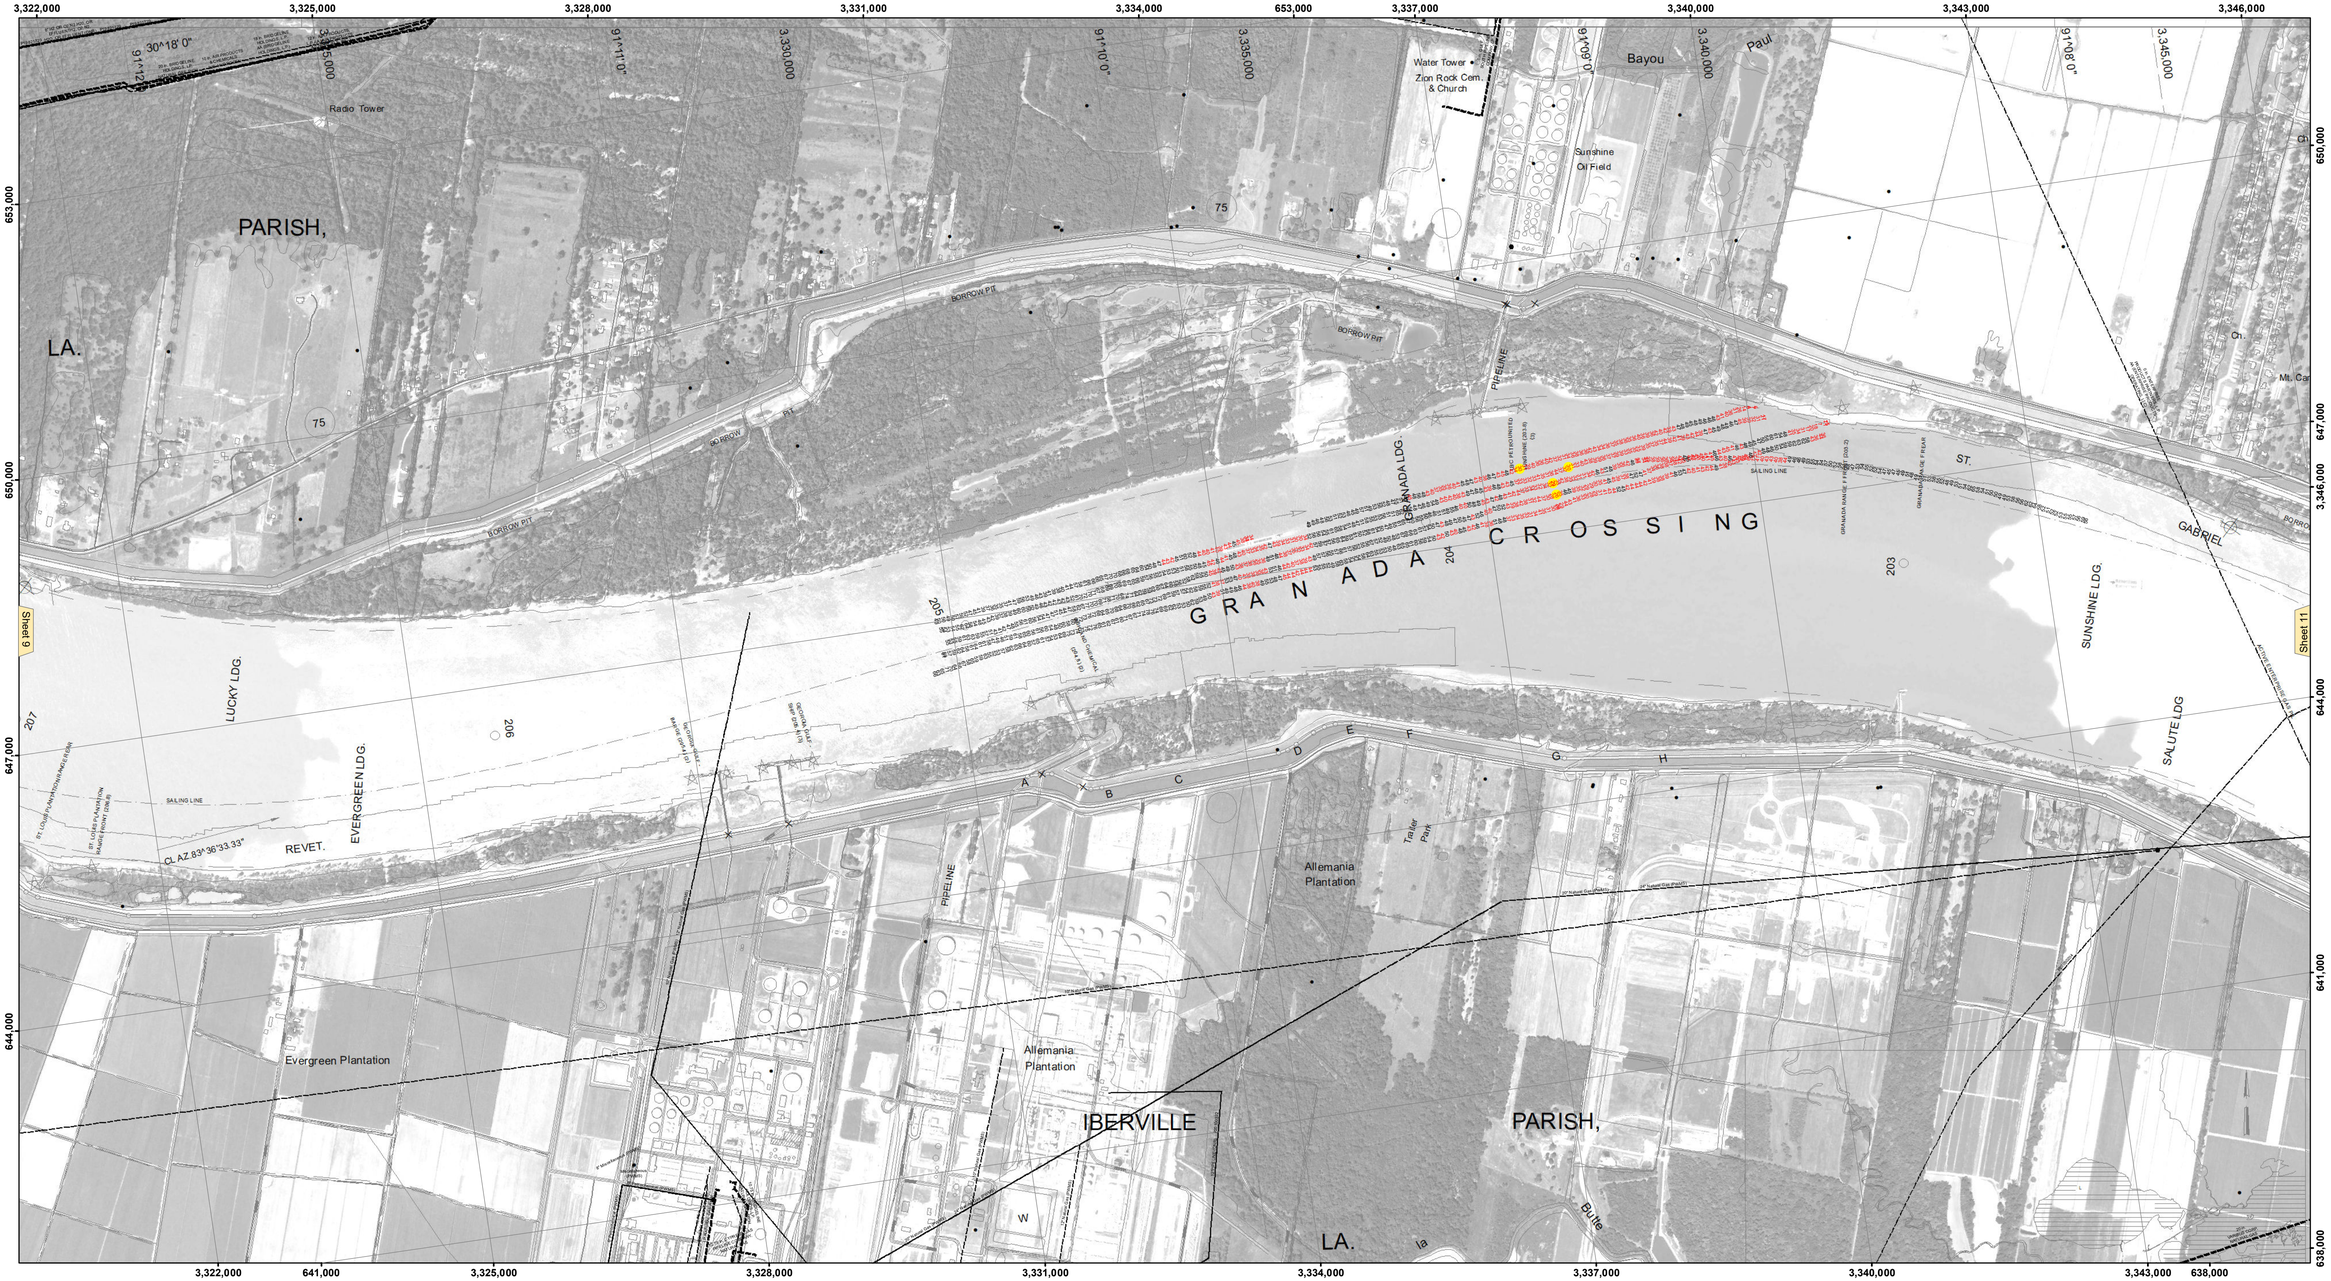

US Army Corps of Engineers
District: CEMVN

Distribution Liability: The data represents the results of data collection and analysis performed by the Corps of Engineers activity and indicates the general existing conditions. As such, it is only valid for its intended use, content, time and accuracy. The Corps of Engineers accepts no responsibility for any misuse of any of the application of the data for other than its intended purpose.

Data Constraints: Hydrographic survey data is subject to change over time. Recipients should consult with the originating Corps of Engineers activity and natural shoaling and scouring processes. The U. S. Army Corps of Engineers accepts no responsibility for any changes in the condition of the area which occur after the date and time of publication. This data is intended for U. S. Army Corps of Engineers' internal use. Private or commercial use of this data is prohibited.

DISCLAIMER:
Access Constraints: The United States Government furnishes these data and information on an "as is" basis. The recipient agrees to assume any and all risks associated with the use of the data or map, and to indemnify the United States Government against any and all claims, losses and liabilities arising from any use under the agreement. The recipient agrees to hold the United States harmless from such claims. In no event shall the United States be liable for any damages, including lost profits, lost savings or other incidental or consequential damages relating to the use of these data or information. The United States disclaims any and all warranties, whether express or implied, including (without limitation) any warranties as to performance, merchantability or fitness for a particular purpose. The United States does not warrant that the data or information will be free from errors or omissions. The recipient agrees that the United States has no duty to inform the recipient of any errors or omissions in the data or information that may become known at any time.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

Surveyed By: RY,LAND,DAMS	Plotted By: BD	Checked By: AO

Submitted:	
Recommended:	Chief, Survey Section
Approved:	Chief, Waterways Maintenance Section

MISSISSIPPI RIVER - B.R. TO GULF
GRANADA RECON
MR_10_GRA_20190726_CS
26 July 2019

Sheet Reference Number
10 **of** 97

Revison Number:
3.12-20160811

VICINITY MAP

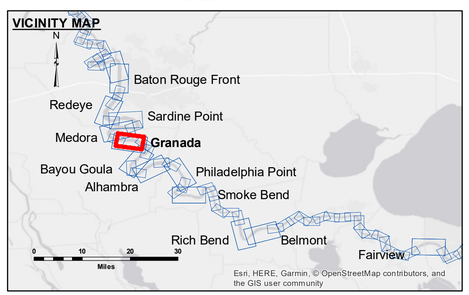

LEGEND

- Federal Navigation Channel
- Federal Navigation Center Line
- As-built Pipeline/Cable
- Unconfirmed Pipeline/Cable
- Project Depth Contour
- Cable Area
- Placement Area
- Anchorage Area
- Obstruction Point
- Wrecks-Submerged
- Borrow Area
- Shoalest Sounding**
- Beacon, General
- Red Navigation Buoy
- Green Navigation Buoy
- 0' and above
- 0' to -5'
- -5' to -10'
- -10' to -20'
- -20' to -30'
- -30' to -35'
- -35' to -40'
- -40' to 45'
- -45' and below

N W E S

LWRP:	1.9
Gage Reading:	BR:39.2 D:27.95 USED:34.10 NGVD
Sea Conditions:	CALM
Vessel Name:	OB-189
Survey Type:	CONDITION
Sounding Frequency***:	HIGH

Feet
0 500 1,000 1,500 2,000 2,500

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.