
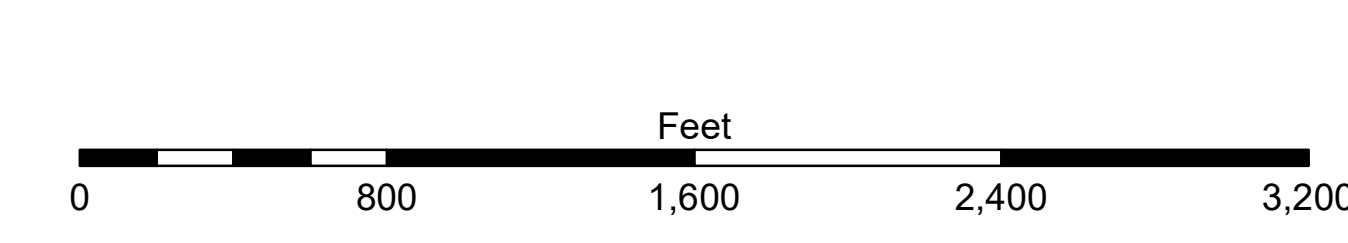


LEGEND			
---	Federal Navigation Channel	□	Borrow Area
---	Federal Navigation Center Line	○	Shoalest Sounding**
---	As-built Pipeline/Cable	★	Beacon, General
---	Unconfirmed Pipeline/Cable	◆	Red Navigation Buoy
---	Project Depth Contour	◆	Green Navigation Buoy
□	Cable Area	□	-12' and above
□	Placement Area	□	-12' to -15'
□	Anchorage Area	□	-15' to -18'
□	Obstruction Point	□	-18' to -20'
□	Wrecks-Submerged	□	-20' and below
□		3	Fluff Thickness*



NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane
 Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
 Datum Relationships for the gage 88600 as of August 2013:
 0.0' NAVD83 = 0.0' MLLW = 1.5' MLG
 Distances on the Atchafalaya River are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2019 Aerial Photography data source: P.A.R. LLC, (1998 DOQQ imagery in green).
 Reference is N.O.A. Navigation Chart No. 11354.
 * Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymetry settings.

DISTRICT/REGION: The United States Department of Defense
PROJECT: The project is a hydrographic survey of the Atchafalaya River, Louisiana, for the purpose of determining the navigability of the river for the purpose of the proposed pipeline project. The survey was conducted by the U.S. Army Corps of Engineers, District of Central Florida, Jacksonville, Florida, on 08 January 2025. The survey was conducted using a 200 kHz and 20 kHz echosounder. The data was processed using the following parameters: 1.0' vertical resolution, 1.0' horizontal resolution, and 1.0' depth resolution. The data was processed using the following parameters: 1.0' vertical resolution, 1.0' horizontal resolution, and 1.0' depth resolution. The data was processed using the following parameters: 1.0' vertical resolution, 1.0' horizontal resolution, and 1.0' depth resolution.

Submitted:	Checked By:
Recommended:	Checked By:
Approved:	Checked By:

ATCHAFALAYA RIVER
BAR CHANNEL
AR_01_BAR_20250108_CS
08 January 2025