CORPS OF ENGINEERS

U.S. ARMY

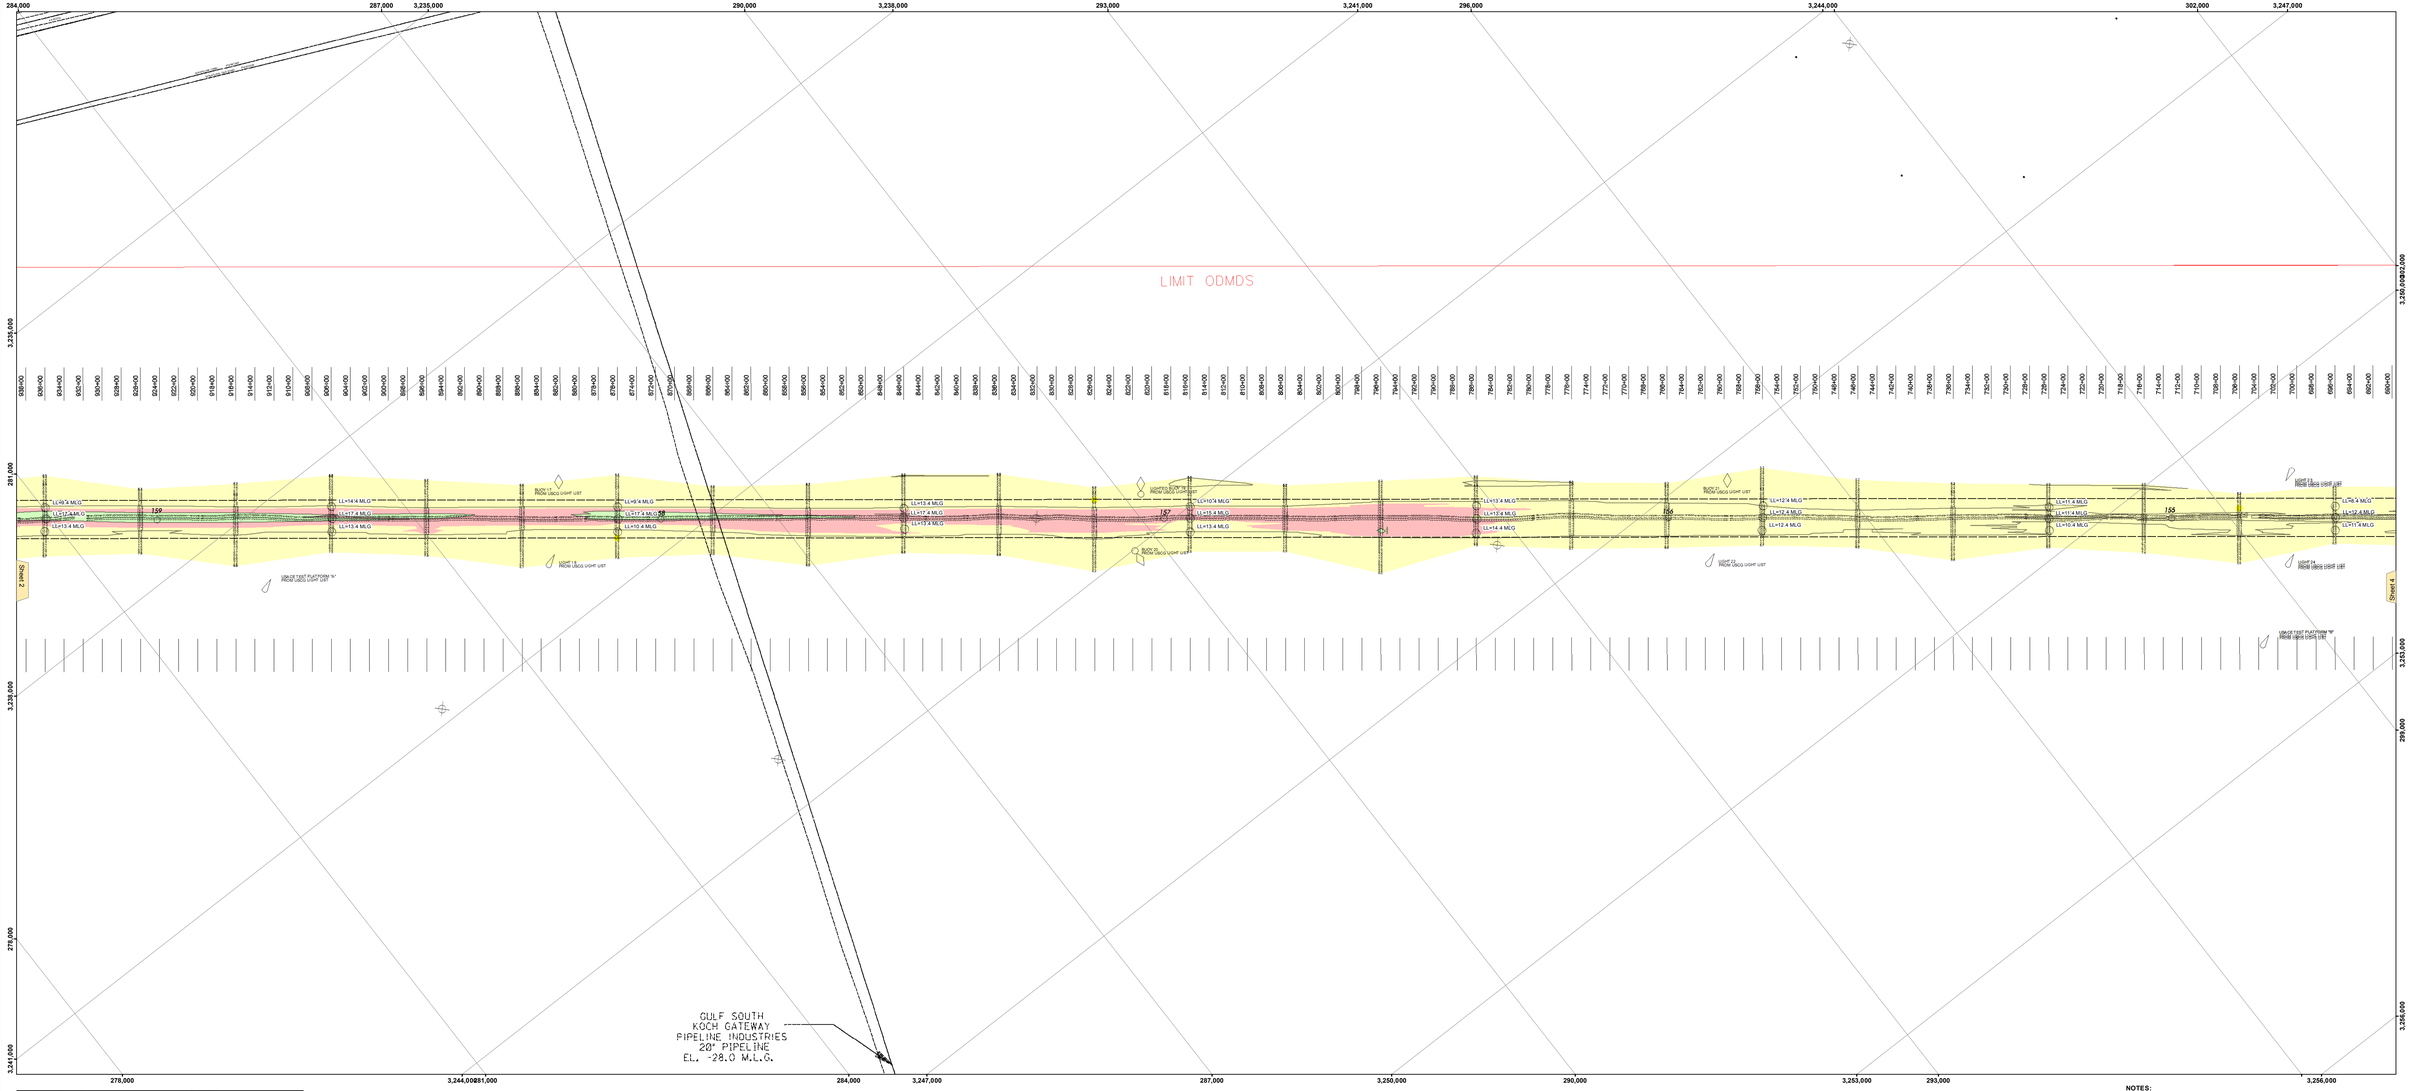

US Army Corps of Engineers
District: CEMVN

Distribution Liability: The data represents the results of data collection and analysis performed by the U.S. Army Corps of Engineers, New Orleans District (USACE) and is subject to change at any time without notice based upon additional hydrographic survey data and analysis. Any use of this data for navigation purposes is at the user's own risk. The USACE disclaims any and all liability for damages of any kind arising out of any use of this data, including direct, indirect, incidental, special or consequential damages, even if the USACE has been advised of the possibility of such damages. The USACE does not warrant the completeness, timeliness, or the accuracy of the data. The USACE does not guarantee or warrant any particular use of the data. The USACE shall not be liable for any deficiency, or for any loss or damage arising from or connected to the data. The USACE shall not be liable for any damage or loss incurred as a result of any incomplete or inaccurate data. The USACE reserves the right to correct, update, modify, or discontinue the data without notice.

Data Constraints: Hydrographic survey data is subject to change due to natural processes and man-made activities occurring in the area. Any such changes occurring since surveying procedures. The U.S. Army Corps of Engineers, New Orleans District (USACE) is not responsible for any changes that occur in the area subsequent to the date of the survey. Use of this data for navigation purposes is at the user's own risk. The USACE disclaims any and all liability for damages of any kind arising out of any use of this data, including direct, indirect, incidental, special or consequential damages, even if the USACE has been advised of the possibility of such damages. The USACE does not warrant the completeness, timeliness, or the accuracy of the data. The USACE does not guarantee or warrant any particular use of the data. The USACE shall not be liable for any deficiency, or for any loss or damage arising from or connected to the data. The USACE shall not be liable for any damage or loss incurred as a result of any incomplete or inaccurate data. The USACE reserves the right to correct, update, modify, or discontinue the data without notice.

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT

Surveyed By	Scale	Checked By
RH LABORDAMS	AS	AO
Submitted:	Supervisor: Chief, Survey Section	Approved: Chief, Waterways Maintenance Section

ATCHAFALAYA RIVER
BAR CHANNEL
AR_03_BAR_20201110_CS
10 November 2020

Sheet Reference Number
3 of 16

Revision Number
4.1.-20191105

VICINITY MAP



LEGEND

Federal Navigation Channel	Cable Area	Borrow Area	-12' and above
Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-12' to -15'
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-15' to -18'
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy	-18' to -20'
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy	-20' and below
		3	Fluff Thickness*

Gage Reading: EUGENE IS: 2.6 MLG
Sea Conditions: 0-1 ft.
Vessel Name: M/V LAFOURCHE
Survey Type: CONDITION
Sounding Frequency***: LOW

Feet
0 800 1,600 2,400 3,200

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
Datum Relationships for the gage 8860l as of August 2013:
0.0' NAVD88 = 0.6' MLLW = 1.5' MLG

Distances on the Atchafalaya River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2013 Aerial Photography data source: GEOCLIP, Atlantic Group, LLC. (1998 DOQQ imagery in green).

Reference is N.O.A.A. Navigation Chart No. 11354.

* Difference between high and low frequency elevations where greater than 1.0'.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.