
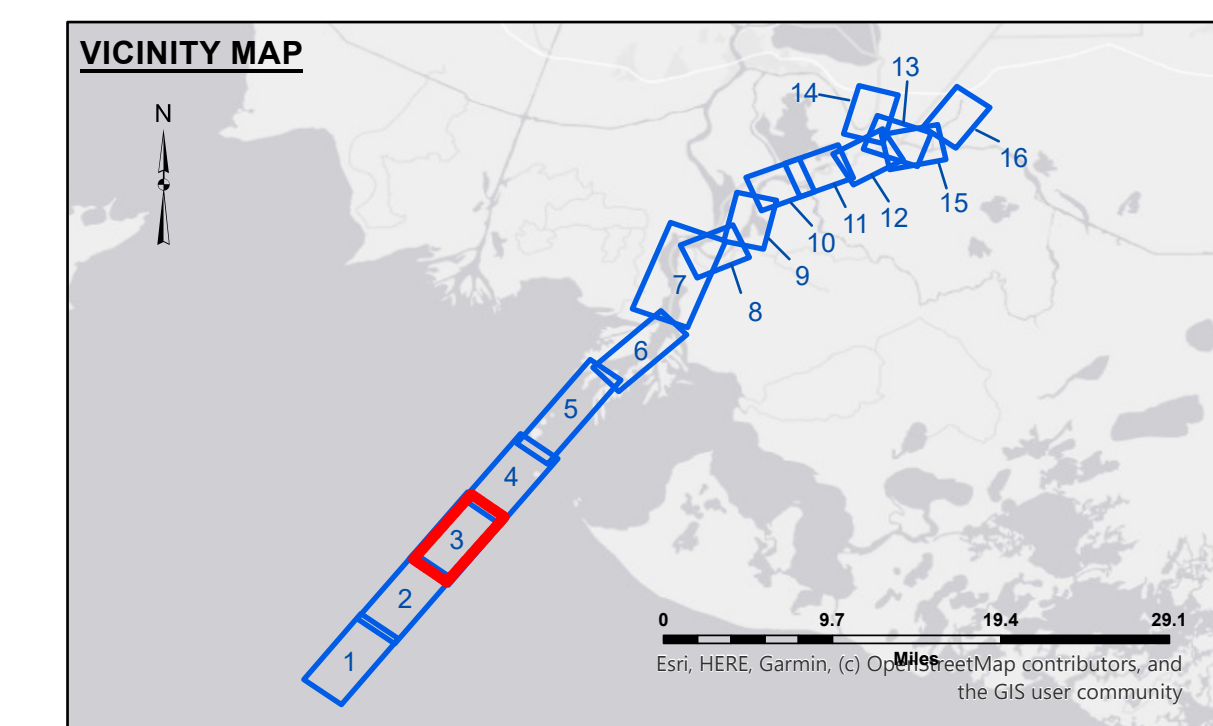


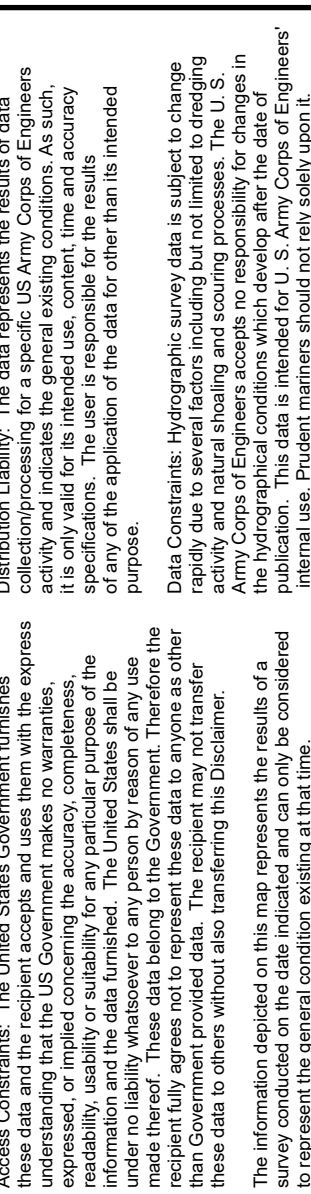

Compass rose showing North (N), South (S), East (E), and West (W).

Scale bar labeled "Feet" with markings at 0, 800, 1,600, 2,400, and 3,200.

NOTES:
Northern Coordinate System
North American Datum of 1983 (NAD83) projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distances units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
Depth Relationships for the gage 98600 as of August 13, 2001
0.0 NAVD83 = 0.6 MLLW + 1.5 MLLG

Distances on the Atchafalaya River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard.

Aerial Photography data source: BUMP 2006 (DOQC 1998 in transparent green)
Reference is NOAA A. Navigation Chart No. 11354.

* Difference between low and low frequency elevations where greater than 1.0'.

** Shoalest Soundings per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location. Low frequency (12 kHz) survey data represents the last signal return. Low frequency (200 kHz) survey data normally penetrates through this "bull" layer to detect elevations of consolidated material. Low frequency accuracies vary by depending on channel conditions and bathymetry.

ATCHAFALAYA RIVER
BAR CHANNEL
AR_03_BAR_20260630_CS
30 June 2026