


LEGEND

--- Federal Navigation Channel	--- Cable Area	□ Borrow Area	■ -12' and above
— Federal Navigation Center Line	■ Placement Area	● Shoalest Sounding**	■ -12' to -15'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -15' to -18'
--- Unconfirmed Pipeline/Cable	⊗ Obstruction Point	★ Red Navigation Buoy	■ -18' to -20'
— Project Depth Contour	⚓ Wrecks-Submerged	★ Green Navigation Buoy	■ -20' and below
			3 Fluff Thickness*



Gage Reading: EUGINE ISLAND: 2.1 MLG AVG.
 Sea Conditions: CALM
 Vessel Name: M/V VALENTOUR
 Survey Type: CONDITION
 Sounding Frequency**: HIGH

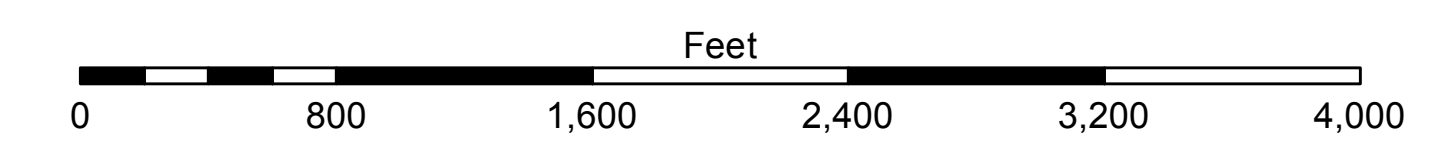

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for the gage 886.00 as of August 2013:
 0.0' NAVD83 = 0.6' MLW = 1.5' MLG
 Distances on the Atchafalaya River are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2019 Aerial Photography data source: PAR, LLC (1998 DOQQ imagery in green).
 Reference is N.O.A.A. Navigation Chart No. 11354.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as 'fluff', if present. Low frequency (20 kHz) survey data normally penetrates through this 'fluff' layer to detect elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymetry settings.

U.S. ARMY CORPS OF ENGINEERS
 NEW ORLEANS DISTRICT

Author:	RYLAND/DAMS
Revised:	
Checked:	
Approved:	

Project ID: _____
 Channel ID: _____
 AD: _____

ATCHAFALAYA RIVER
 UPPER BAY CHANNEL
 AR_06_BAY_20220210_AD
 10 February 2022

Sheet Reference Number
 6 of 16