


[illegible]

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted: _____	Reviewed By: PMLT _____
Recommended: _____	Plotted By: BD _____
Approved: _____	Checked By: AOJH _____

ATCHAFALAYA RIVER
BERWICK LOCK FOREBAY
AS_00_BLF_20260707_CS
07 July 2026


**Sheet
Reference
Number**
1 of 1

Revision Number:
5.26.05.21, 5.26.05.2

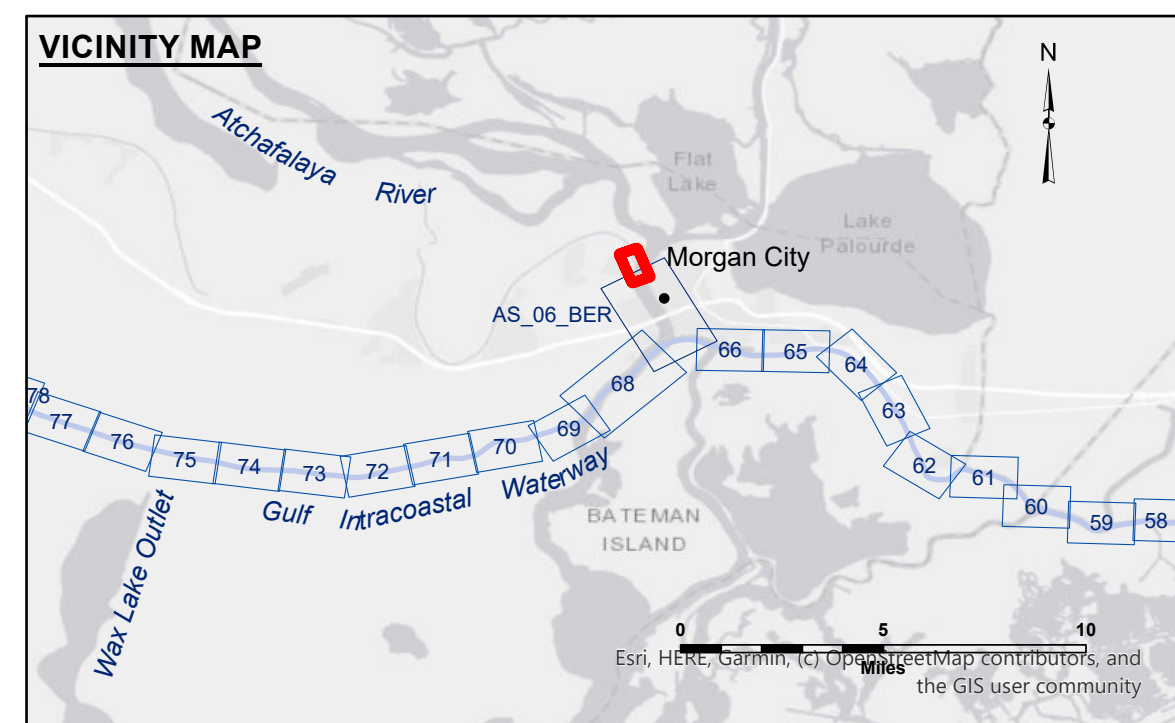

- LEGEND**

Federal Navigation Channel	Cable Area	Borrow Area	-6' and above
Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-6 to -8
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-8 to -10
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy	-10 to -12
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy	-12' to -15'
			-15' to -18'
			-18' to -20'
			-20' and below

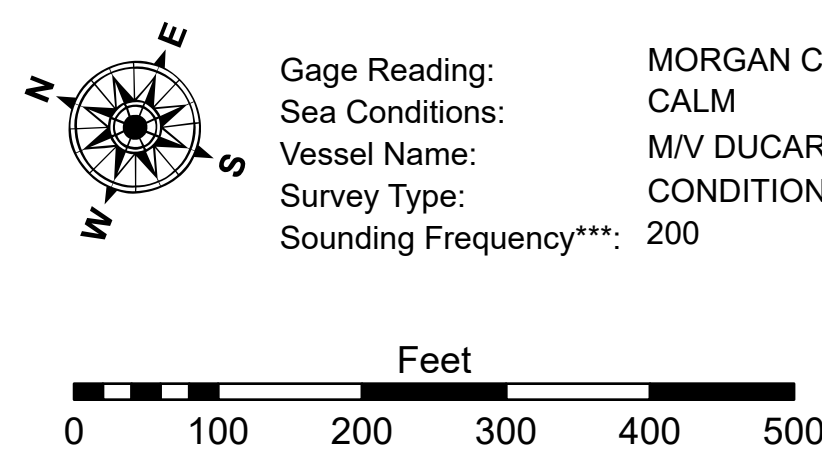

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

G. Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
Datum Relationships for Lower Atchafalaya River at Morgan City (03780) as of 2025:
0.0' NAVD88 (2009.55) = 2.19' MLG

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2023 Aerial Photography data source: NAIP.

Reference is N.O.A.A. Navigation Chart No. 11355.

**** Shoalest Sounding per Quarter per Reach.**

**** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (2) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated material. Low frequency accuracies may vary depending on channel conditions and bathymetric settings.**