


[illegible]

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		Surveyed By: P.M.L.T. _____
Submitted: _____		Plotted By: B.D. _____
Recommended: _____	Chief, Survey Section	
Approved: _____	Chief, Waterways Maintenance Section	Checked By: A.O.J.H. _____

ATCHAFALAYA RIVER
BERWICK LOCK FOREBAY
AS_00_BLF_20260729_CS
29 July 2026


**Sheet
Reference
Number
1 of 1**

Revision Number:
5.26.05.21-5.26.05.21

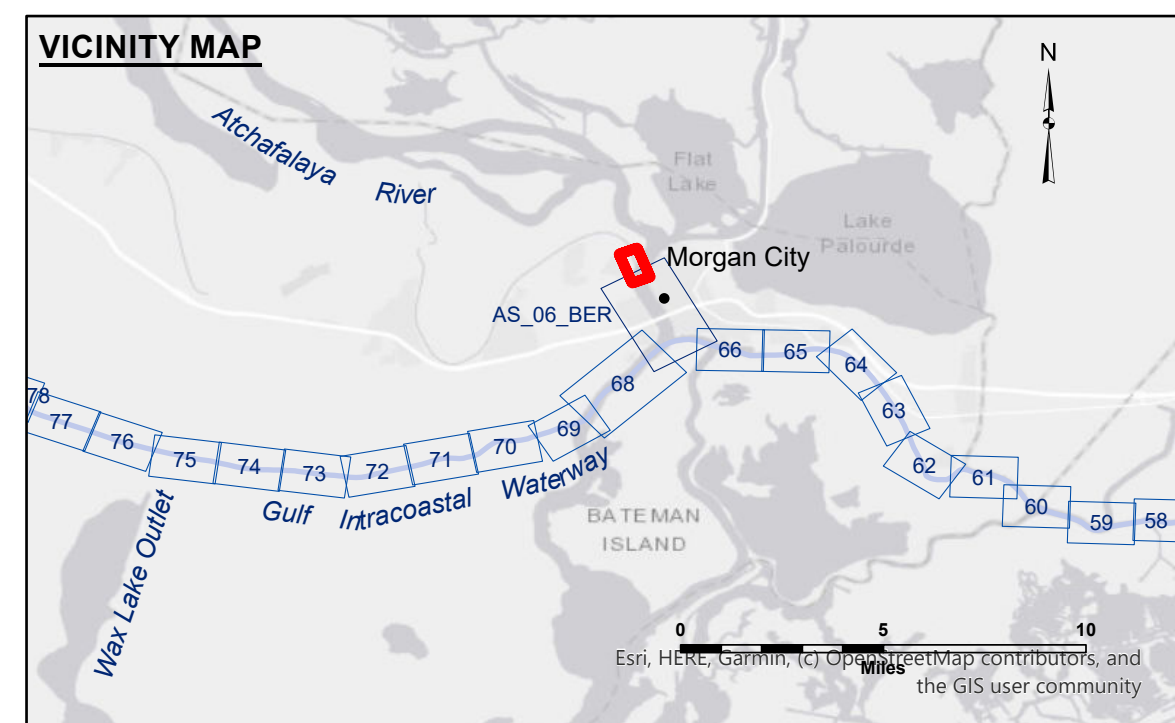

- LEGEND**

- - - Federal Navigation Channel	Cable Area	Borrow Area	-6' and above
— Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-6 to -8
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-8 to -10
..... Unconfirmed Pipeline/Cable	Obstruction Point	-12' to -15'	-10 to -12
— Project Depth Contour	Wrecks-Submerged	Red Navigation Buoy	-15' to -18'
		Green Navigation Buoy	-18' to -20'
			-20' and below

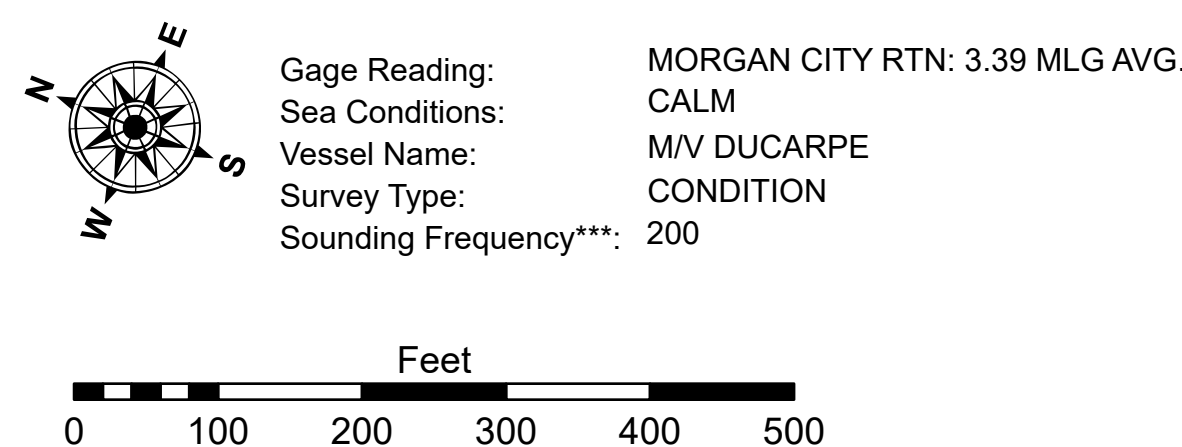

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

3. Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
Datum Relationships for Lower Atchafalaya River at Morgan City (03780) as of 2025:
0.0' NAVD88 (2009.55) = 2.19' MLG

The location of navigation aids are based on and provided by the U.S. Coast Guard.

2023 Aerial Photography data source: NAIP.

Reference is N.O.A.A. Navigation Chart No. 11355.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (200 kHz) data normally penetrates through this "fluff" layer to depict elevations of consolidated material. Low frequency accuracies may vary depending on channel conditions and fluff settings.