


DISCLAIMER
 The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were originally prepared, and that the user is responsible for the accuracy, completeness, and reliability of the data for other than its intended purpose. The information depicted on this map represents the results of a survey conducted at the time of the survey and is not to be used for any purpose other than that for which it was originally prepared. The user is responsible for the accuracy, completeness, and reliability of the data for other than its intended purpose. The information depicted on this map represents the results of a survey conducted at the time of the survey and is not to be used for any purpose other than that for which it was originally prepared. The user is responsible for the accuracy, completeness, and reliability of the data for other than its intended purpose.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveyed By: CHAMPINE/SCHAFFER	Plotted By: JHT
Recommended:	Chief, Survey Section	Checked By: JHT
Approved:	Chief, Waterways Maintenance Section	

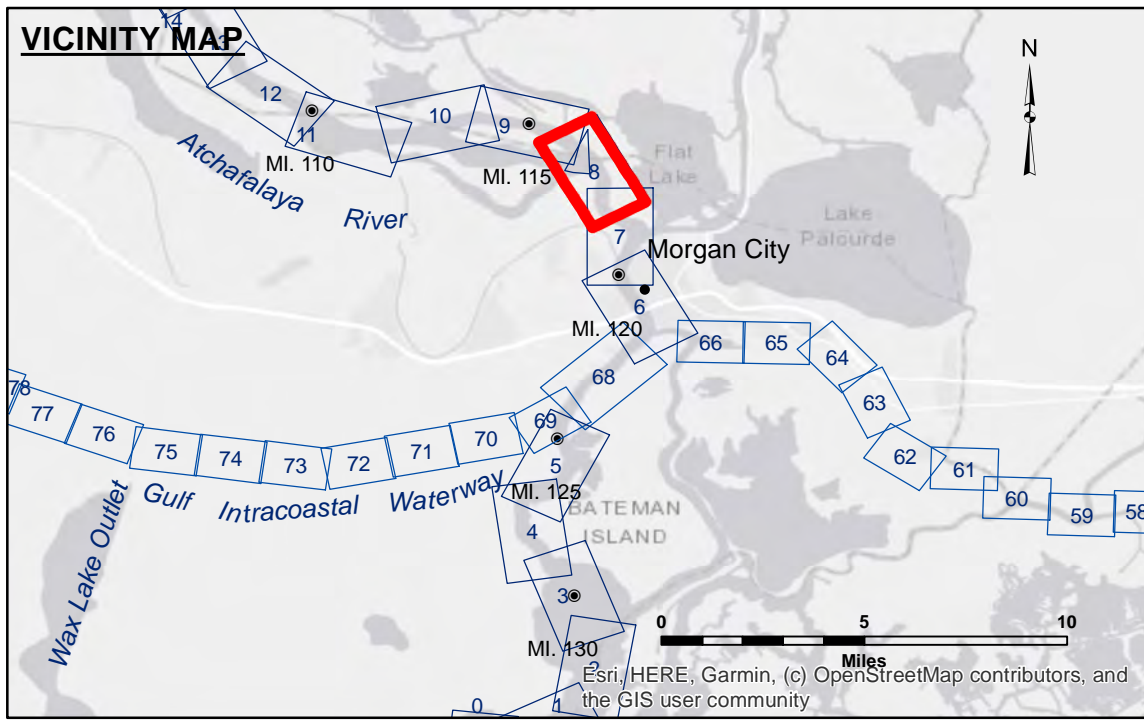

LEGEND			
	Federal Navigation Channel		Cable Area
	Federal Navigation Center Line		Placement Area
	As-built Pipeline/Cable		Borrow Area
	Unconfirmed Pipeline/Cable		Shoalest Sounding**
	Project Depth Contour		Beacon, General
	Wrecks-Submerged		Red Navigation Buoy
			Green Navigation Buoy

NOTES:

Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).


The location of navigation aids are based on and provided by the U.S. Coast Guard.

2017 Aerial Photography data source: NAIP, 1998 DOQQ imagery shown in green from USGS.

Reference is N.O.A. Navigation Chart No. 11355.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

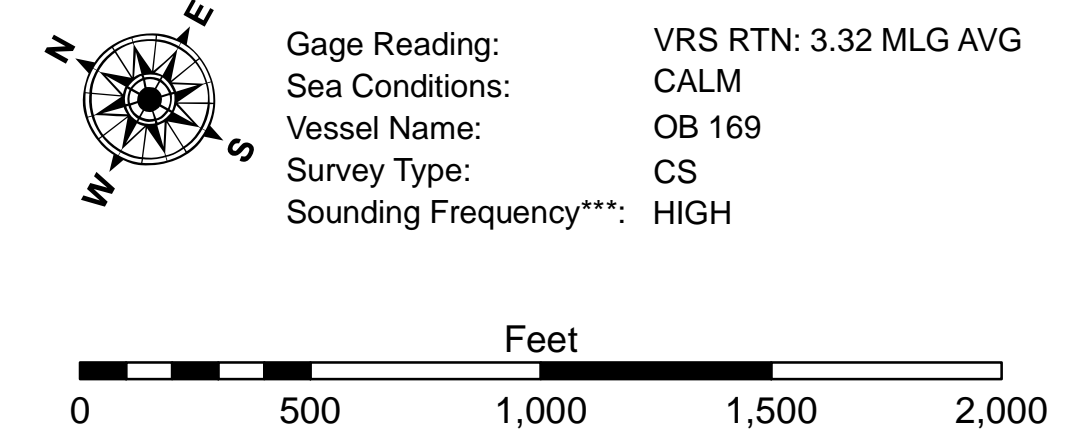

**ATCHAFALAYA RIVER
 STOUTS PASS
 AS_08_STP_20230711_CS
 11 July 2023**

**Sheet
 Reference
 Number
 8 of 66**