



DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were provided. The user is responsible for the reliability, usability or suitability for any particular purpose of the data. The user is responsible for the accuracy, completeness, timeliness, or any other factor that may affect the quality or reliability of the data. The user is responsible for the application of the data for other than its intended purpose. Data generated by hydrographic survey data is subject to change rapidly due to several factors including but not limited to changing hydrographic conditions, changes in bathymetry, and changes in the hydrographic conditions which develop after the date of the survey. The information depicted on this map represents the results of a survey conducted on the date indicated and is not intended to represent the general condition existing at that time. The information is provided for informational purposes only and is not intended to be used for any other purpose.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	Surveyed By: PM/SPS
Recommended:	Plotted By: BD
Approved:	Checked By: AC

**ATCHAFALAYA RIVER
STOUTS PASS
AS_09_STP_20220728_CS
28 July 2022**

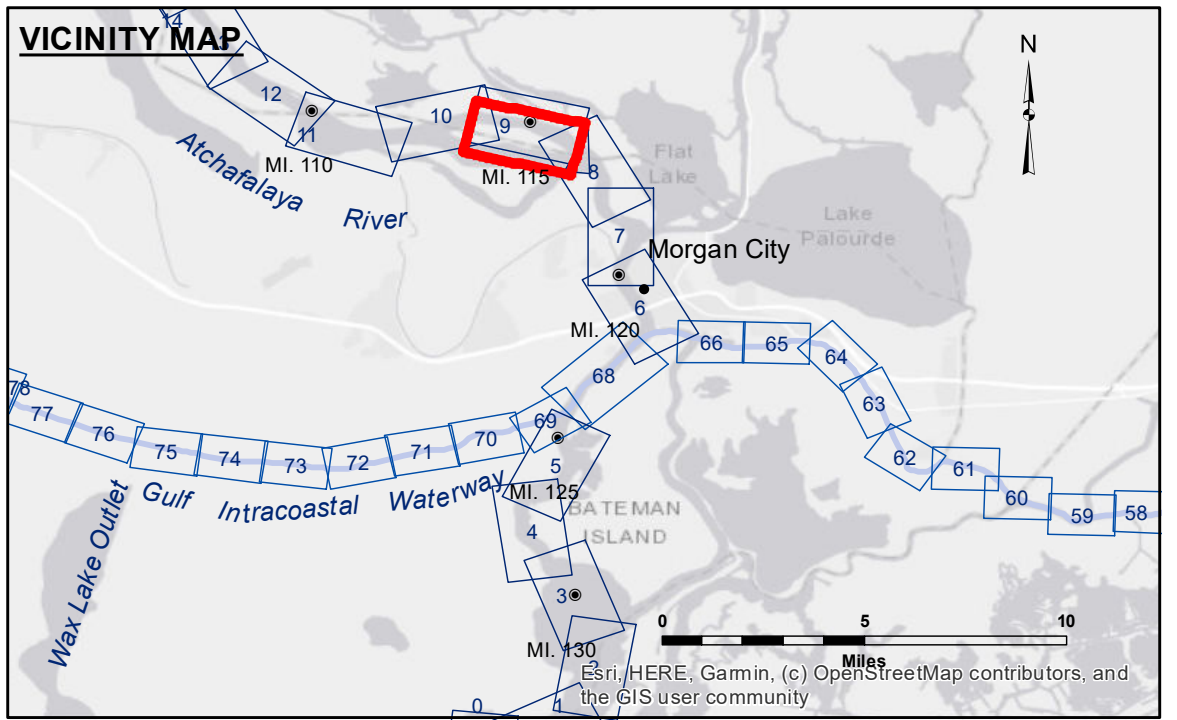

LEGEND	
--- Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	□ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	⚓ Wrecks-Submerged
□ Borrow Area	★ Beacon, General
● Shoalest Sounding**	♦ Red Navigation Buoy
☆ Beacon, General	◆ Green Navigation Buoy
□ -10' and above	
□ -10 to -12	
□ -12' to -15'	
□ -15' to -18'	
□ -18' to -20'	
□ -20' and below	

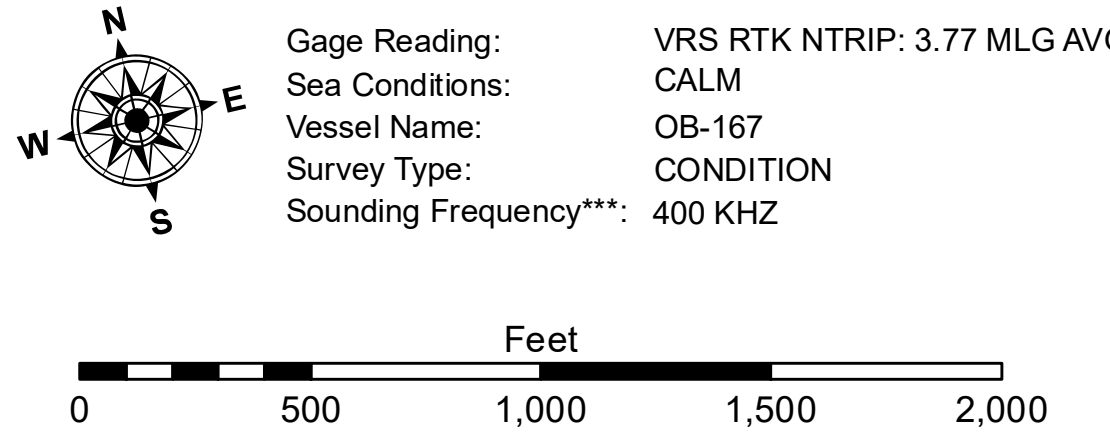

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
The location of navigation aids are based on and provided by the U.S. Coast Guard.
Reference is N.O.A.A. Navigation Chart No. 11355.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet
Reference
Number
9 of 66**