


DISCLAIMER
 The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were originally collected, and that the data are not to be used for any purpose other than that for which they were originally collected. The user is responsible for the accuracy, completeness, and reliability of the data for their intended purpose. The information depicted on this map represents the results of a survey conducted on the date of the survey and is not to be used for any purpose other than that for which it was originally collected. The user is responsible for the accuracy, completeness, and reliability of the data for their intended purpose. The information depicted on this map represents the results of a survey conducted on the date of the survey and is not to be used for any purpose other than that for which it was originally collected. The user is responsible for the accuracy, completeness, and reliability of the data for their intended purpose.


U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	Surveyed By: PMS/PS
Recommended:	Plotted By: BD
Approved:	Checked By: AC

ATCHAFALAYA RIVER
STOUTS PASS TO MYETTE PT
AS_10_S2M_20220728_CS
28 July 2022

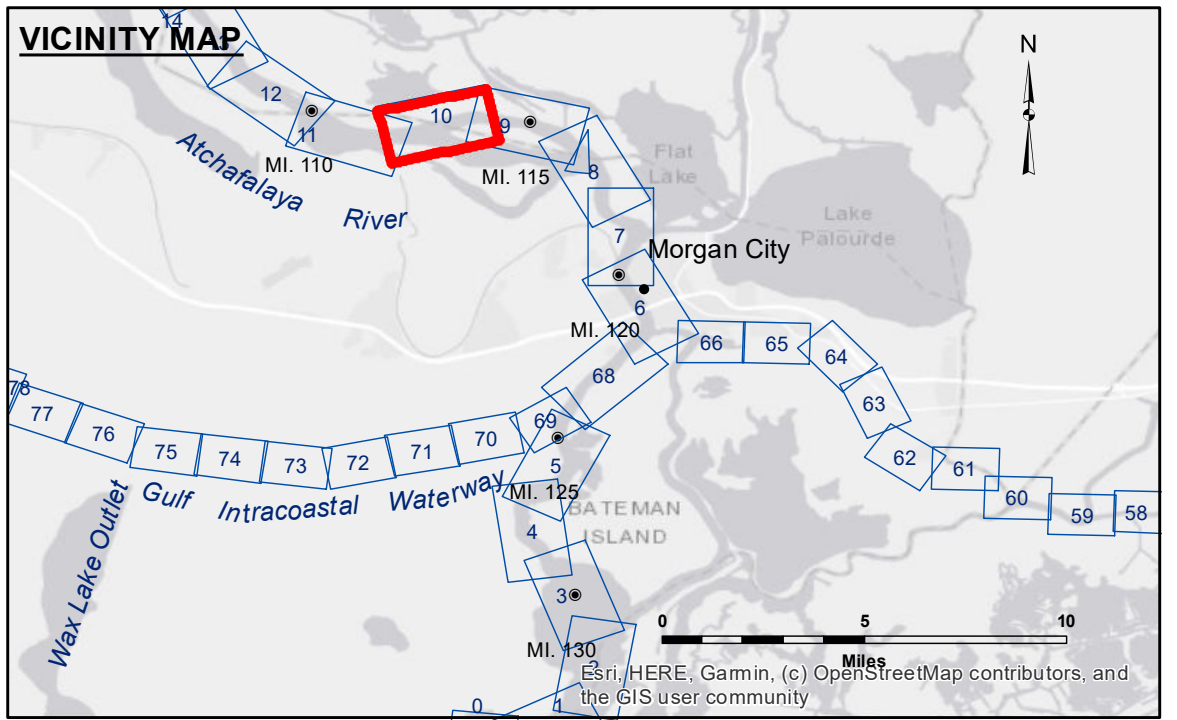

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	□ -10' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	□ -10 to -12
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	□ -12' to -15'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	♦ Red Navigation Buoy	□ -15' to -18'
— Project Depth Contour	✈ Wrecks-Submerged	♦ Green Navigation Buoy	□ -18' to -20'
			□ -20' and below

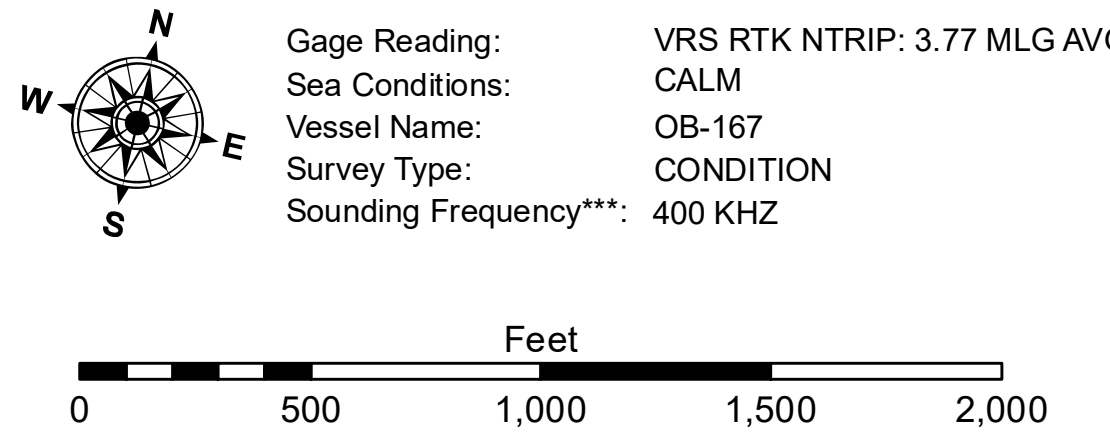

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2017 Aerial Photography data source: NAIP. 1998 DOQQ imagery shown in green from USGS.
 Reference is N.O.A. Navigation Chart No. 11355.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
10 of 66