


DISCLAIMER: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project and is not intended for general use. The user is responsible for the results and accuracy of the data for their own use. The user is responsible for the results and accuracy of the data for their own use. The user is responsible for the results and accuracy of the data for their own use. The user is responsible for the results and accuracy of the data for their own use.


U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	RYLAND/MOLLERE
Recommended:	JHT
Approved:	JHT

ATCHAFALAYA RIVER
STOUTS PASS TO MYETTE PT
AS_10_S2M_20240411_CS
11 April 2024

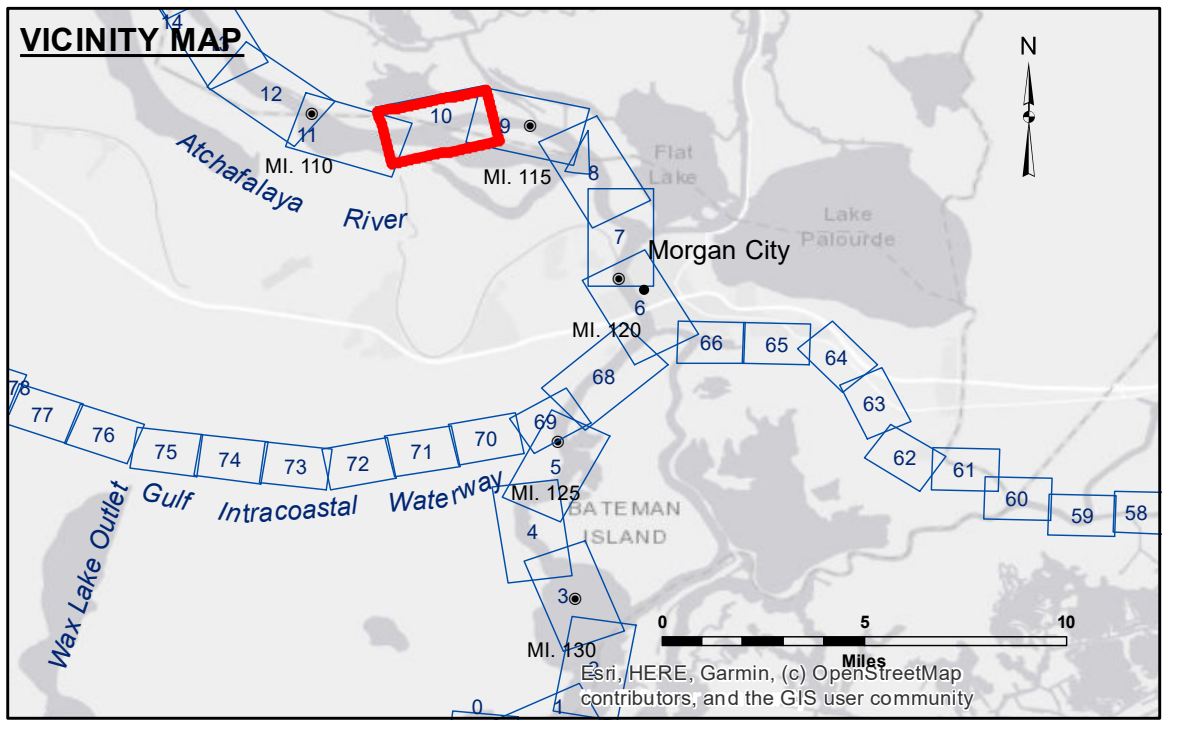


LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	-10' and above
— Federal Navigation Center Line	▭ Placement Area	● Shoalest Sounding**	-10 to -12
— As-built Pipeline/Cable	⊗ Anchorage Area	☆ Beacon, General	-12 to -15'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	-15' to -18'
— Project Depth Contour	⊗ Wrecks-Submerged	◆ Green Navigation Buoy	-18' to -20'
			-20' and below

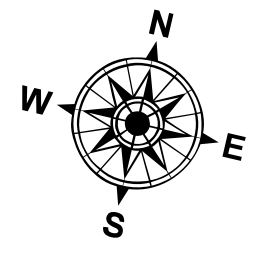

Gage Reading: MORGARN CITY VRS: 5.30 MLG AVG
 Sea Conditions: CALM
 Vessel Name: M/V OB 167
 Survey Type: CONDITION
 Sounding Frequency***: HIGH

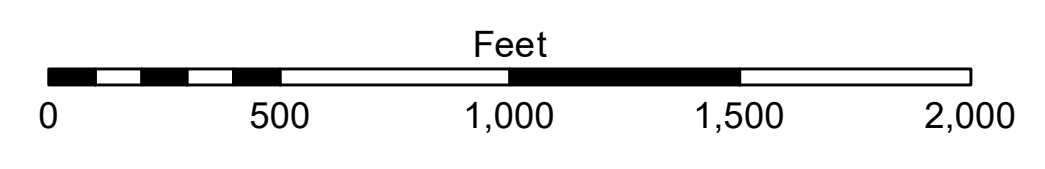

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2017 Aerial Photography data source: NAIP. 1998 DOQQ imagery shown in green from USGS.
 Reference is N.O.A.A. Navigation Chart No. 11355.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
10 of 66