


TABLE OF COORDINATES

POINT NO.	X	Y
1	3320263.990	735657.752
2	3319967.816	738187.185
3	3320071.675	740217.209
4	3320382.865	741618.264
5	3319710.959	744354.696
6	3317097.260	747457.144


CURVE #1 DATA
 $\Delta = 19^\circ 11' 16.58''$
 $D = 0^\circ 56' 22.44''$
 $R = 6098.1$
 $T = 1030.8$
 $L = 2042.2$
 $LC = 2032.7$

CURVE #2 DATA
 $\Delta = 52^\circ 38' 11.32''$
 $D = 1^\circ 48' 10.98''$
 $R = 3177.7$
 $T = 1571.8$
 $L = 2919.3$
 $LC = 2817.7$

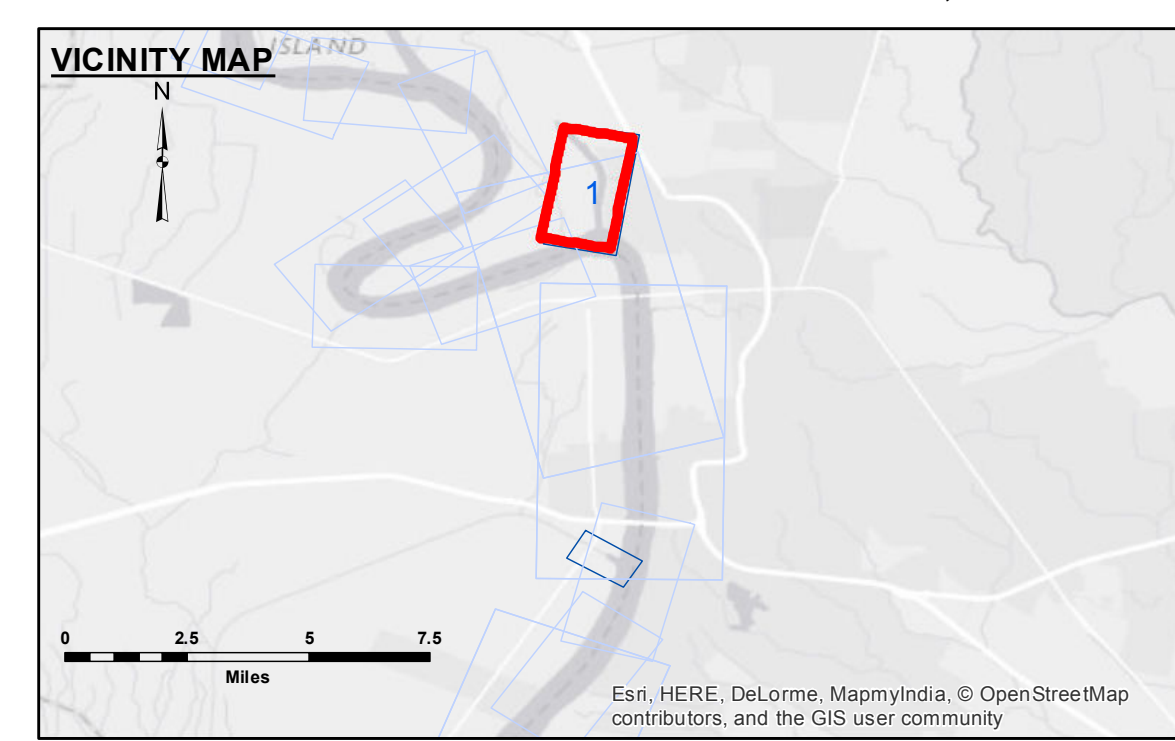

LEGEND

Federal Navigation Channel	Cable Area	Borrow Area
Federal Navigation Center Line	Placement Area	Shoalest Sounding**
As-built Pipeline/Cable	Anchorage Area	Beacon, General
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy
		-8' and above
		-8' to -10'
		-10' to -12'
		-12' and below

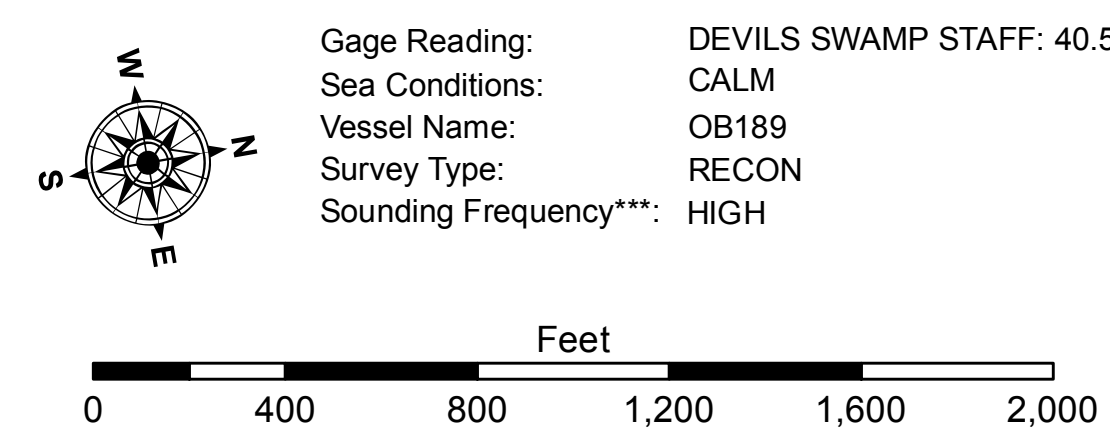

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below National Geodetic Vertical Datum of 1929 (NGVD29).
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
 The location of navigation aids are base on and provided by the U.S. Coast Guard.
 2012 Aerial Photography data source: USGS DOQQ
 Reference is N.O.A.A. Navigation Chart No. 11370.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



DISCLAIMER:
 The data represented on this map is the result of a collection of data for a specific project. The data is not intended to be used for any other purpose than that for which it was collected. The user is responsible for the accuracy, reliability, usability, or suitability of the data for any particular purpose. The user is responsible for the accuracy, reliability, usability, or suitability of the data for any particular purpose. The user is responsible for the accuracy, reliability, usability, or suitability of the data for any particular purpose. The user is responsible for the accuracy, reliability, usability, or suitability of the data for any particular purpose.

**U.S. ARMY CORPS OF ENGINEERS
 NEW ORLEANS DISTRICT**

Submitted:	Surveyed By: DSJH
Recommended:	Plotted By: AO
Approved:	Checked By: TC

**BATON ROUGE HARBOR
 BATON ROUGE HARBOR
 BH_01_DEV_20160324
 24 March 2016**

**Sheet Reference Number
 1 of 1**