



TABLE OF COORDINATES

POINT NO.	X	Y
1	3320263.990	736657.752
2	3319967.816	738187.185
3	3320071.675	740217.209
4	3320382.865	741618.264
5	3319710.959	744354.696
6	3317097.260	747457.144

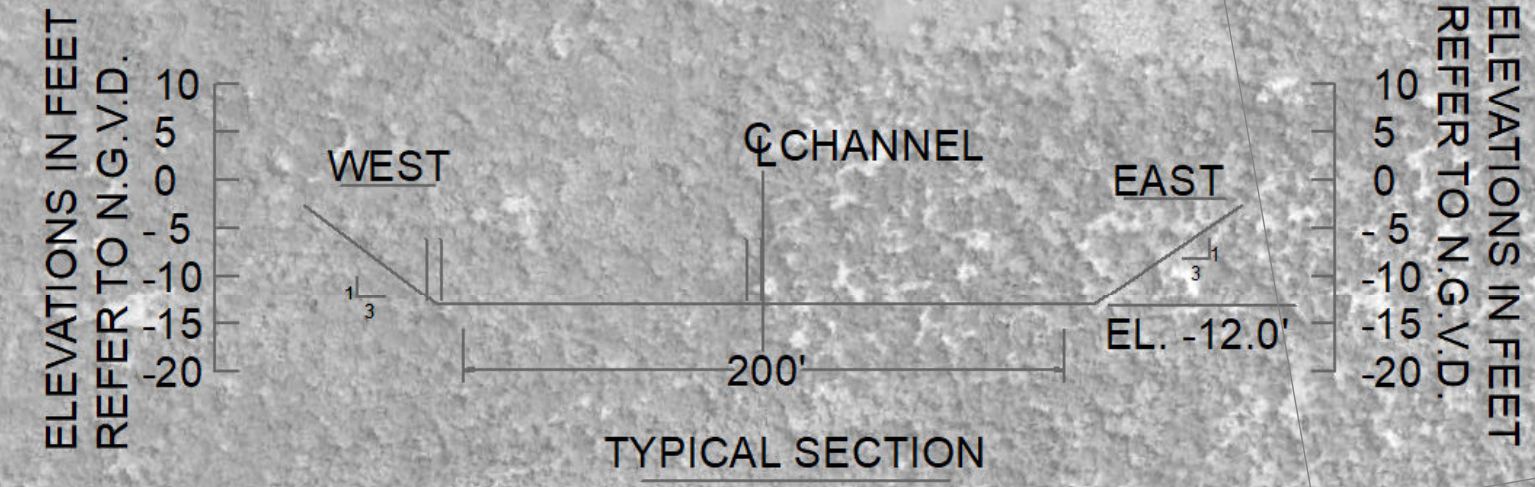


CURVE #1 DATA  
 $\Delta = 19^\circ 11' 16.58''$   
 $D = 0^\circ 56' 22.44''$   
 $R = 6098.1$   
 $T = 1030.8$   
 $L = 2042.2$   
 $LC = 2032.7$

CURVE #2 DATA  
 $\Delta = 52^\circ 38' 11.32''$   
 $D = 1^\circ 48' 10.98''$   
 $R = 3177.7$   
 $T = 1571.8$   
 $L = 2919.3$   
 $LC = 2817.7$

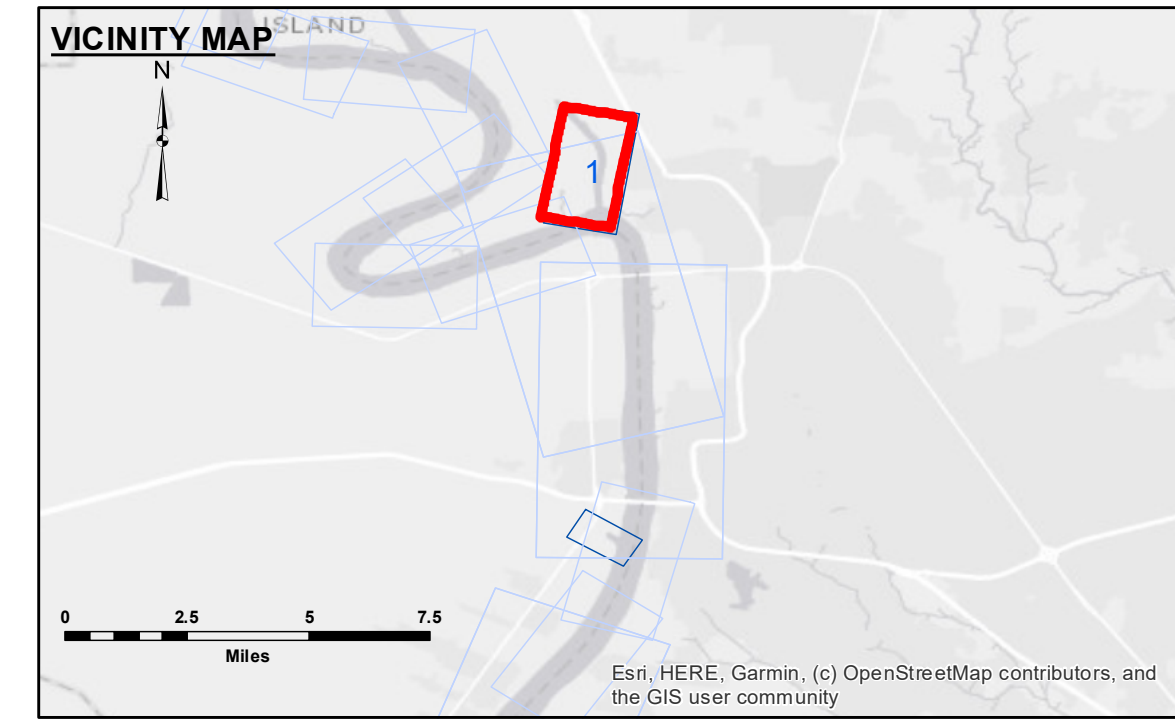

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**
— As-built Pipeline/Cable	□ Anchorage Area	☆ Beacon, General
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy

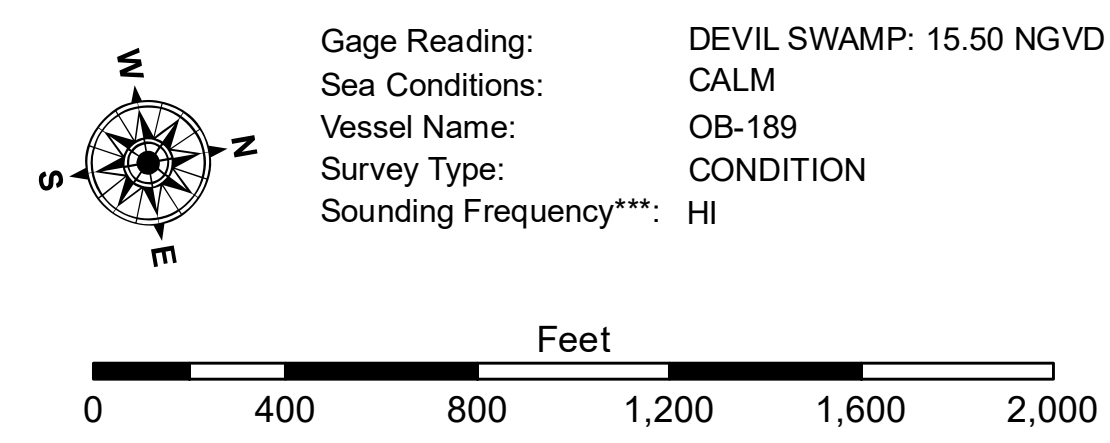

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below National Geodetic Vertical Datum of 1929 (NGVD29).

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2015 Aerial Photography data source: NAIP

Reference is N.O.A.A. Navigation Chart No. 11370.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



DISCLAIMER: The data represents the results of data collection processing for a specific US Army Corps of Engineers project. The data is not intended for use in any other project or for any other purpose. The user is responsible for the results and accuracy of the data. The application of the data for other than its intended purpose is at the user's risk. The user is responsible for the results and accuracy of the data. The application of the data for other than its intended purpose is at the user's risk. The user is responsible for the results and accuracy of the data. The application of the data for other than its intended purpose is at the user's risk.

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT

Submitted:	Surveyed By: PM/JA
Recommended: Chief Survey Section	Plotted By: BD
Approved: Chief Waterways Maintenance Section	Checked By: AD/JH

BATON ROUGE HARBOR  
 BATON ROUGE HARBOR  
 BH\_01\_DEV\_20230106\_CS  
 06 January 2023

Sheet Reference Number  
 1 of 1

Revision Number:  
 4.2-202 (04/20)