

US Army Corps of Engineers  
District: CEMVN

Distribution Limitation: The data represents the results of data collection processing for a specific US Army Corps of Engineers project and does not represent the general posting conditions. As such, any data or information is not to be used for any other purpose than the intended purpose of the project for which it was collected.

Data Constraints: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to change in activity and surveying conditions. The US Army Corps of Engineers does not guarantee the accuracy of the hydrographic survey data which is derived after the date of the survey. This data is intended for US Army Corps of Engineers internal use. Project managers should not rely upon it.

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the Government makes no warranties, expressed or implied, concerning the data, its accuracy, reliability, or suitability for any particular purpose or the information and the data furnished. The United States shall be liable only for damages resulting from its gross negligence or willful misconduct. These data are a product of the Government. The recipient may agree not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to one without the permission of the Government.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general conditions existing at that time.

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT  
UPPER SHEET 2  
CR\_02\_UPR\_20260204\_CS  
04 February 2026

NOTES:  
Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).  
Datum Relationships for gage 73550 as of December 2013:  
0.0' NAVD88 (OPUS 2010) = 0.6' MLLW = 1.6' MLG or 0.0' MLLW = 1.0' MLG



Distances on the Calcasieu River are shown at 1 mile intervals.  
The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.

2022 Aerial Photography data source: PAR LLC  
Reference is N.O.A.A. Navigation Chart No. 11339.  
\* Difference between high and low frequency elevations where greater than 1.0'.  
\*\* Shoal sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: DM 119 VRN: -0.36 MLLW AVG.  
Sea Conditions: CHOPPY  
Vessel Name: M/V TECHE  
Survey Type: CONDITION  
Sounding Frequency\*\*\*: LOW

0 400 800 1,200 1,600  
Feet

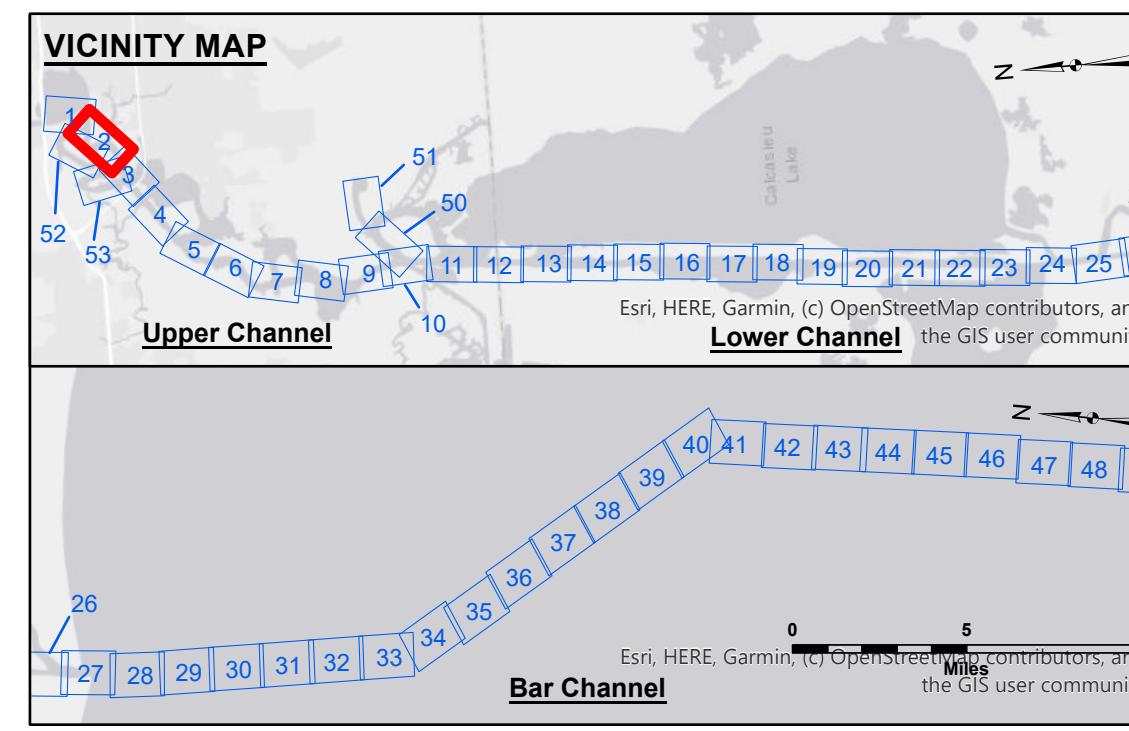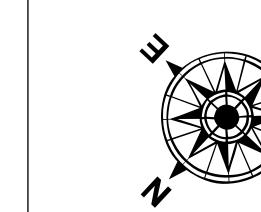

Sheet Reference Number  
2 of 53

Revision Number:  
5.25.08-04-5.25.08.04