


Access/Use: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are provided for informational purposes only and are not to be used for any other purpose. The user is responsible for the accuracy, completeness, timeliness, and reliability of the data for their intended use. The user is responsible for the accuracy, completeness, timeliness, and reliability of the data for their intended use. The user is responsible for the accuracy, completeness, timeliness, and reliability of the data for their intended use.

Submitted:	Surveyed By: SUR_JDH
Revised/Revised By:	Plotted By: BTJ
Approved:	Checked By: TAF

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT


CALCASIEU SHIP CHANNEL
UPPER SHEET 9
CR_09_UPR_20151029
29 October 2015

Sheet Reference Number
9 of 53

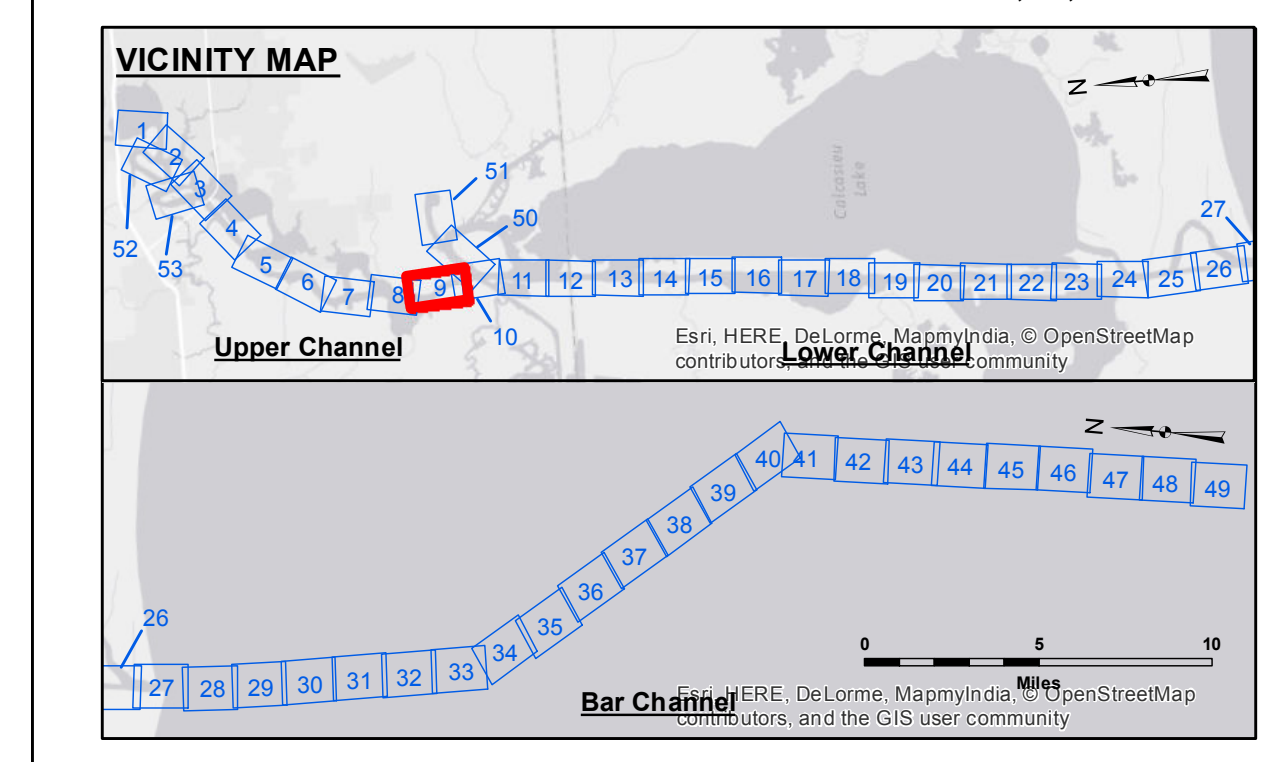

LEGEND

- - - Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -15' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -15' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -25'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -25' to -32'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	■ -32' to -38'
			■ -38' to -40'
			■ -40' to -42'
			■ -42' and below

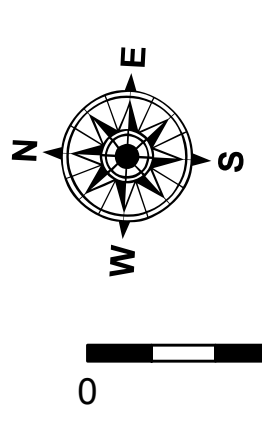

Gage Reading: RANGE E: 2.6 MLG
Sea Conditions: CALM
Vessel Name: M/V TECHE
Survey Type: CONDITION
Sounding Frequency***: LOW

0 400 800 1,200 1,600
Feet

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for gage 73575 as of December 2013: 0.0' NAVD83 (OPUS 2013) = 0.8' MLLW = 1.8' MLG or 0.0' MLLW = 1.0' MLG
Distances on the Calcasieu River are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.
2010 Aerial Photography data source: NAIP
Reference is N.O.A. Navigation Chart No. 11339.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.