

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results and accuracy of the data for their intended use. The user is responsible for the results and accuracy of the data for their intended use. The user is responsible for the results and accuracy of the data for their intended use.


Access: Contractors, the United States Government, and other users of this data and the recipient agrees and uses them with the express understanding that the data is provided for informational purposes only. It is not to be used for any other purpose without the express written consent of the US Army Corps of Engineers. The user is responsible for the results and accuracy of the data for their intended use. The user is responsible for the results and accuracy of the data for their intended use.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	Surveyed By: SP-JS
Recommended:	Plotted By: BD
Checked:	Chart, Survey Section
Approved:	Chart, Waterways Maintenance Section

**CALCASIEU SHIP CHANNEL
LOWER SHEET 15
CR_15_LWR_20241030_CS
30 October 2024**

**Sheet Reference Number
15 of 53**

Revision Number: 4.2-20240820

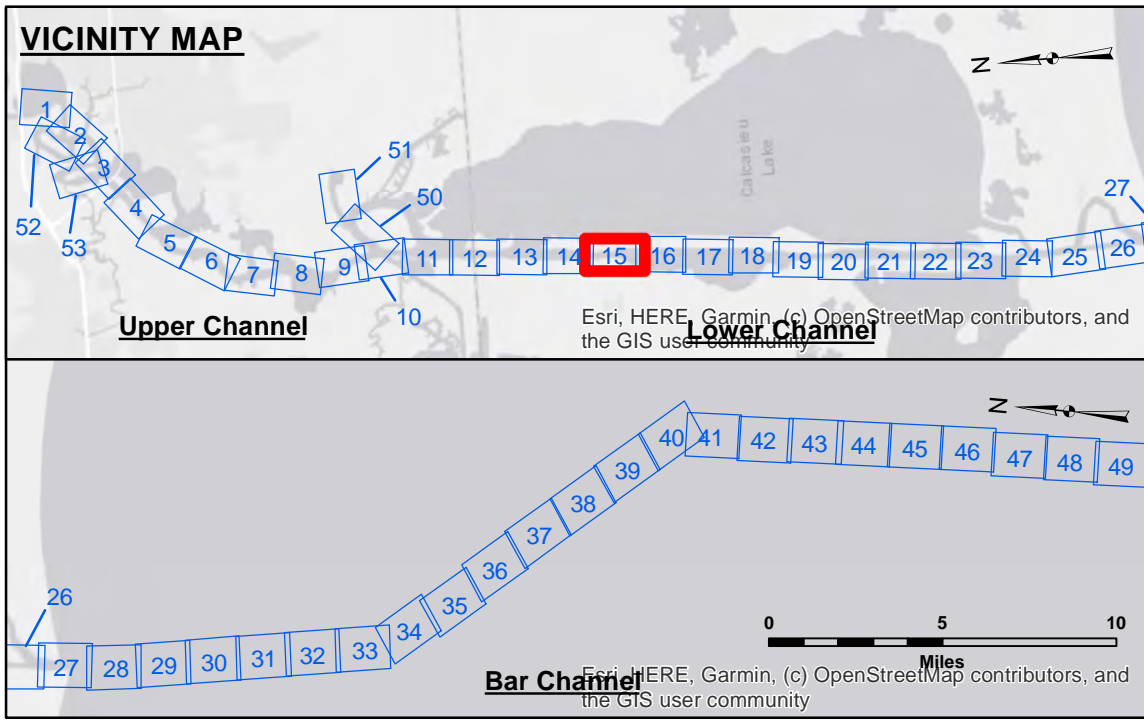

LEGEND	
--- Federal Navigation Channel	● Cable Area
— Federal Navigation Center Line	□ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	⊗ Wrecks-Submerged
3 Fluff Thickness (feet)*	★ Beacon, General
● Shoalest Sounding**	◆ Red Navigation Buoy
★ Beacon, General	◆ Green Navigation Buoy

Gage Reading: HACKBERRY VRN: 2.28 MLLW AVG.
Sea Conditions: CHOPPY
Vessel Name: MV TECHÉ
Survey Type: CONDITION
Sounding Frequency*:** LOW


Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).
 Datum Relationships for gage 73600 as of December 2013:
 0.0 NAVD88 (OPUS 2010) = 1.0' MLLW = 2.0' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2022 Aerial Photography data source: PAR LLC
 Reference is N.O.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

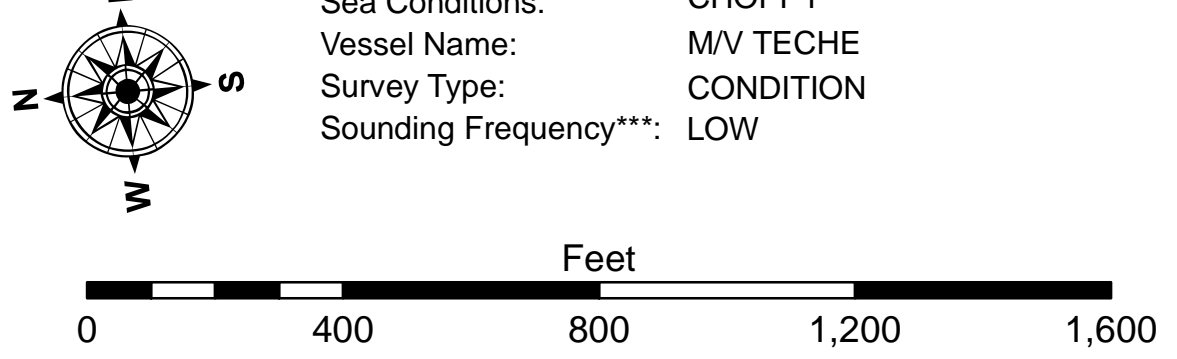

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.