


[illegible]

U.S. ARMY CORP. OF ENGINEERS	
Submitted _____	Sent by: SP, US _____
Recommended: Chief Survey Section _____	Picked By: BD _____
Approved: Chief Waterways Maintenance Section _____	Checked by: AOJH _____


CALCASIEU SHIP CHANNEL  
GAP SHEET 27  
CR\_27\_GAP\_20250416\_CS  
16 April 2025

**Sheet  
Reference  
Number  
of**  
27 53

**Revision Number:**  
5.25.04.03-5.25.04.03

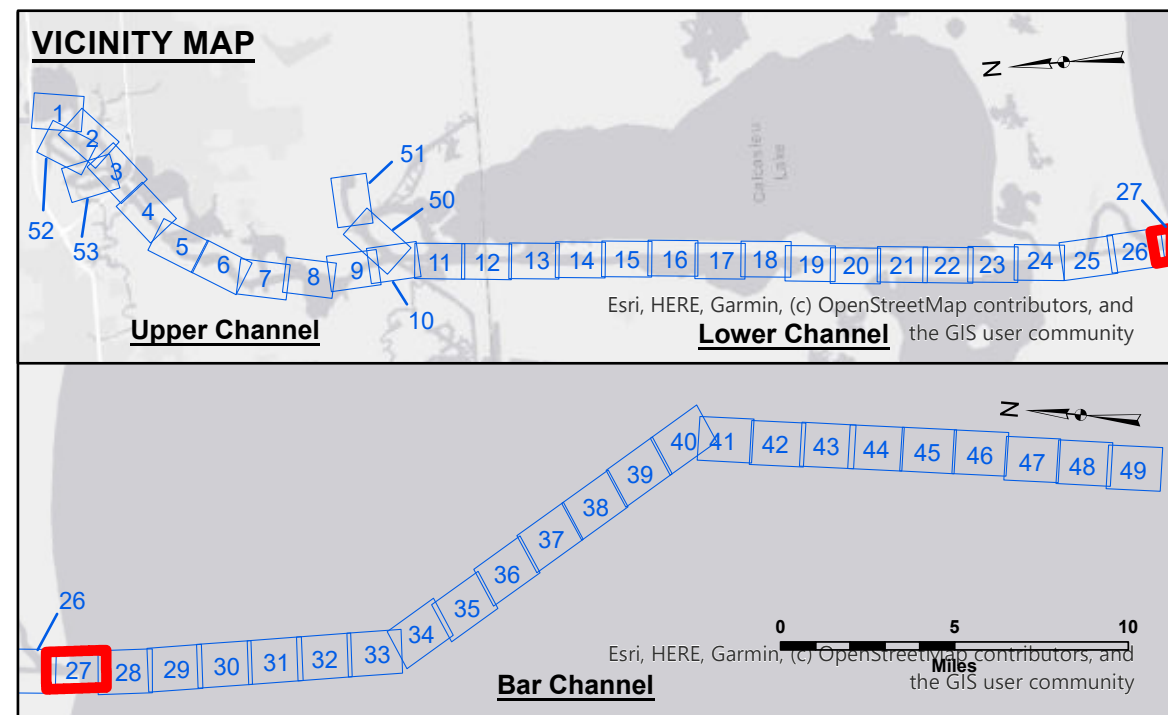

LEGEND			
---	Federal Navigation Channel		Cable Area
—	Federal Navigation Center Line		Placement Area
—	As-built Pipeline/Cable		Anchorage Area
.....	Unconfirmed Pipeline/Cable		Obstruction Point
—	Project Depth Contour		Wrecks-Submerged
		3	Fluff Thickness (feet)*
			Shoalest Sounding**
			Beacon, General
			Red Navigation Buoy
			Green Navigation Buoy
			-16' and above
			-16' to -21'
			-21' to -26'
			-26' to -33'
			-33' to -39'
			-39' to -41'
			-41' to -43'
			-43' and below

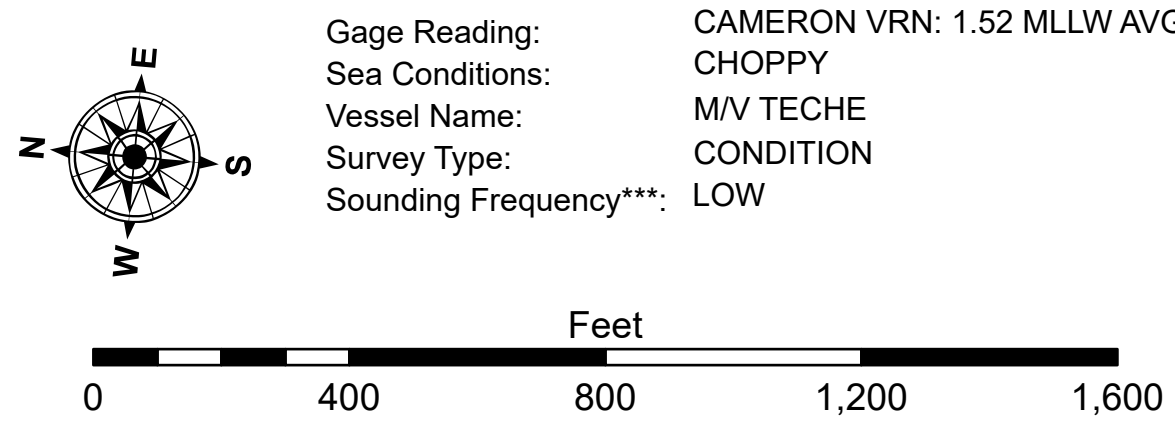

**461,000  
NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane  
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).  
Datum Relationships for figure 73650 as of December 2013:  
0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard  
and USACE survey crews.

2022 Aerial Photography data source: PAR LLC

Reference is N.O.A.A. Navigation Chart No. 11339.

\* Difference between high and low frequency elevations where greater than 1.0'.  
\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and include undisturbed solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.