

US Army Corps of Engineers District: CEMVW

DISCLAIMER: The United States Government furnishes this information as a service to the public and does not warrant the accuracy, reliability, or completeness of the information. The user is responsible for the results of any use of this information. The user is also responsible for the results of any use of this information for purposes not intended by the Corps of Engineers. The Corps of Engineers is not responsible for any damage or injury resulting from the use of this information. The Corps of Engineers is not responsible for any damage or injury resulting from the use of this information. The Corps of Engineers is not responsible for any damage or injury resulting from the use of this information.

REVISIONS:


Submitted:	Reviewed By:
SRS_JDH	AO
Recommended:	Checked By:
AO	AO
Approved:	Checked By:
AO	AO

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT

Calcasieu Ship Channel
BAR SHEET 28
CR_28_BARX_20160920
20 September 2016

Sheet Reference Number
28 of 53

Revision Number: 15-9-20160000

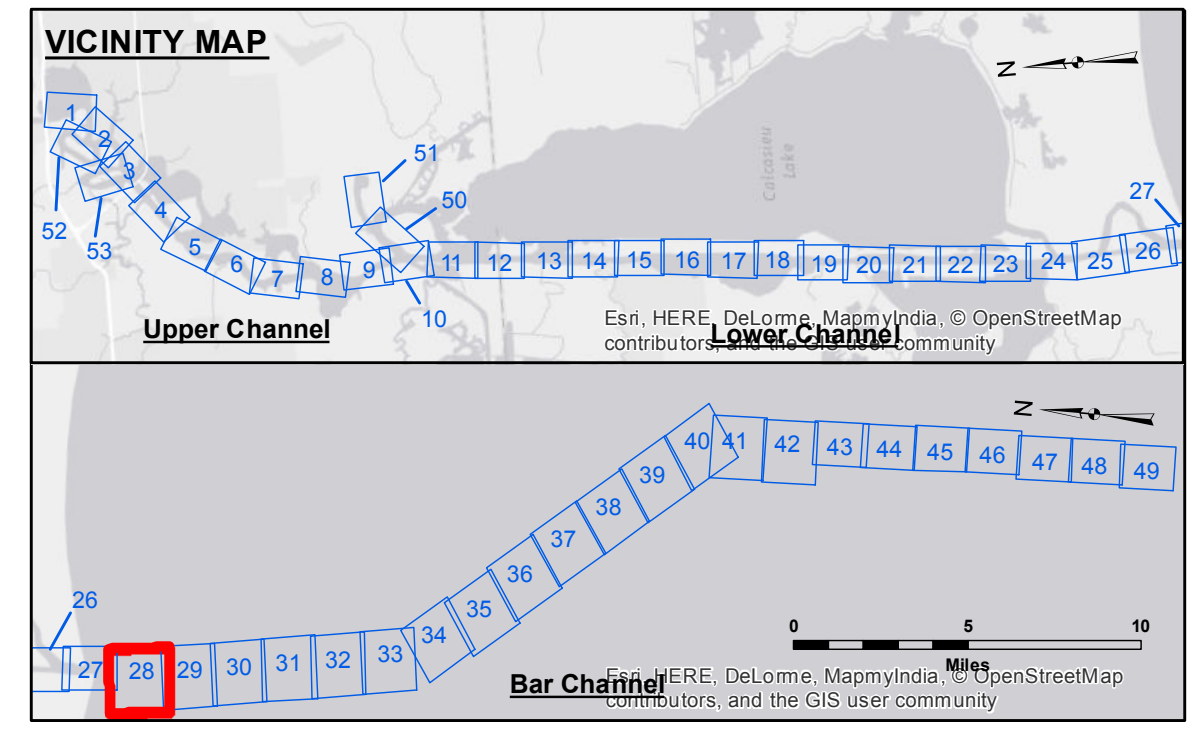

LEGEND

--- Federal Navigation Channel	● Cable Area	3 Fluff Thickness (feet)*	■ -15' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -15' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -25'
--- Unconfirmed Pipeline/Cable	□ Obstruction Point	★ Red Navigation Buoy	■ -25' to -32'
— Project Depth Contour	✈ Wrecks-Submerged	★ Green Navigation Buoy	■ -32' to -38'
			■ -38' to -40'
			■ -40' to -42'
			■ -42' and below

Gage Reading: CAMERON: 2.5 MLG AVG
 Sea Conditions: 1' SEAS
 Vessel Name: M/V TECHE
 Survey Type: CONDITION
 Sounding Frequency***: HIGH/LOW

Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gull Datum (MLG). Datum Relationships for page 73650 as of December 2013:
 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP
 Reference is N.O.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.