


LEGEND

| | | | |
|----------------------------------|---------------------|---------------------------|------------------|
| --- Federal Navigation Channel | ○ Cable Area | 3 Fluff Thickness (feet)* | ■ -16' and above |
| — Federal Navigation Center Line | □ Placement Area | ● Shoalest Sounding** | ■ -16' to -21' |
| — As-built Pipeline/Cable | ⊗ Anchorage Area | ★ Beacon, General | ■ -21' to -26' |
| Unconfirmed Pipeline/Cable | ⊗ Obstruction Point | ◆ Red Navigation Buoy | ■ -26' to -33' |
| — Project Depth Contour | ✈ Wrecks-Submerged | ◆ Green Navigation Buoy | ■ -33' to -39' |
| | | | ■ -39' to -41' |
| | | | ■ -41' to -43' |
| | | | ■ -43' and below |



NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: CAMERON VRN: 2.33 MLLW AVG
 Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW), Datum Relationships for gage 73650 as of December 2013: CHOPPY
 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG
 Distances on the Calcasieu River are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.
 2022 Aerial Photography data source: PAR LLC
 Reference is N.O.A.A. Navigation Chart No. 11339.
 * Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

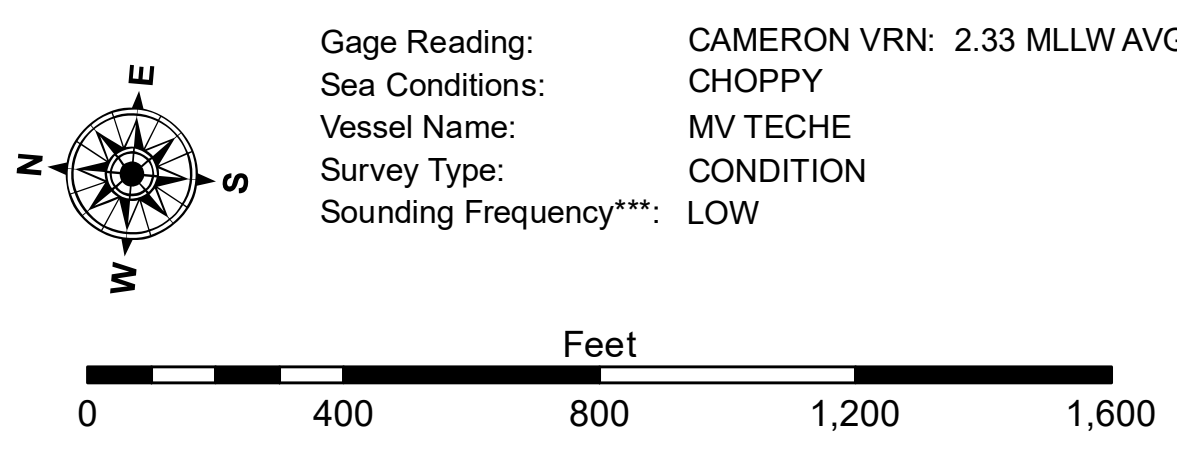

DISCLAIMER
 Access Constraints: The United States Government furnishes these data and the recipient accepts and uses them with the express warranty, or implied concerning the accuracy, completeness, reliability, usability or suitability for any particular purpose of the information. The user is responsible for the results of any application of the data for other than its intended purpose.
 Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. The user is responsible for the results of any application of the data for other than its intended purpose.
 Data: Constant Hydrographic survey data is subject to change rapidly due to several factors including but not limited to changing hydrographic conditions which develop after the date of the survey. The user is responsible for the results of any application of the data for other than its intended purpose.
 The information depicted on this map represents the results of a survey conducted on the date indicated. It is not intended to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS
 NEW ORLEANS DISTRICT

| | |
|---------------------------------------------------|-----------------------|
| Submitted: | Surveyed By: SP-JS |
| Recommended: Chief, Survey Section | Plotted By: JH |
| Approved: Chief, Waterways Maintenance Section | Checked By: JH |

CALCASIEU SHIP CHANNEL
BAR SHEET 28
CR_28_BAR_20240829_BD
29 August 2024

Sheet Reference Number
28 of 53