
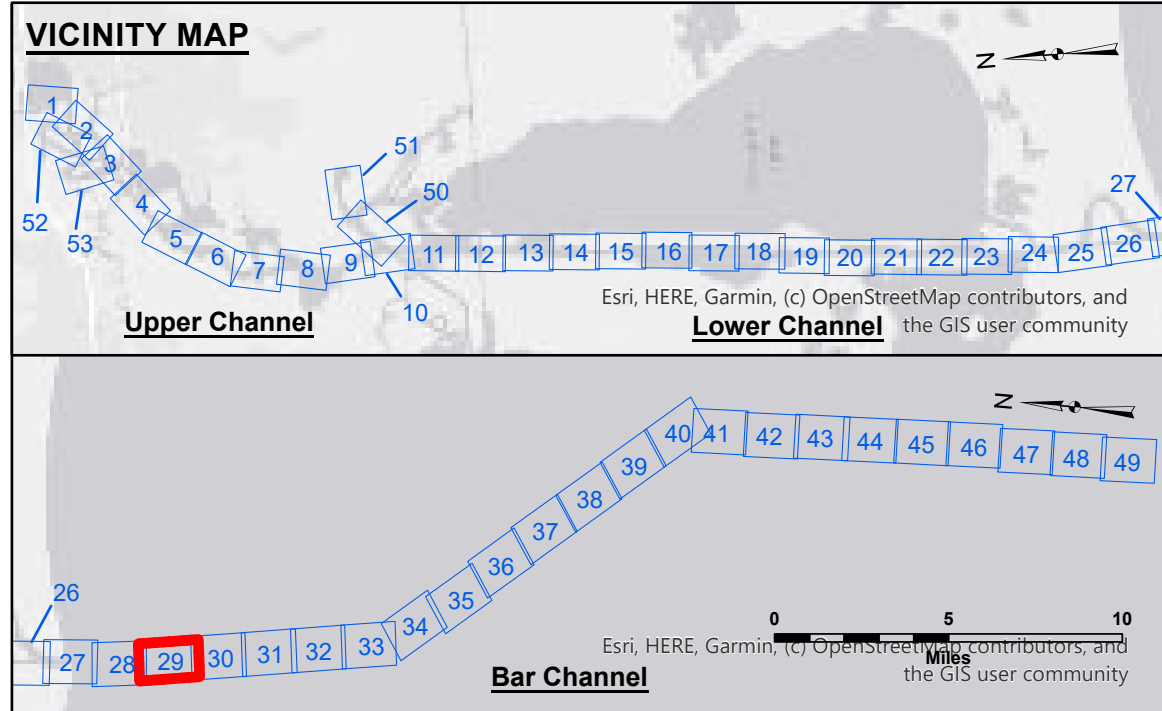


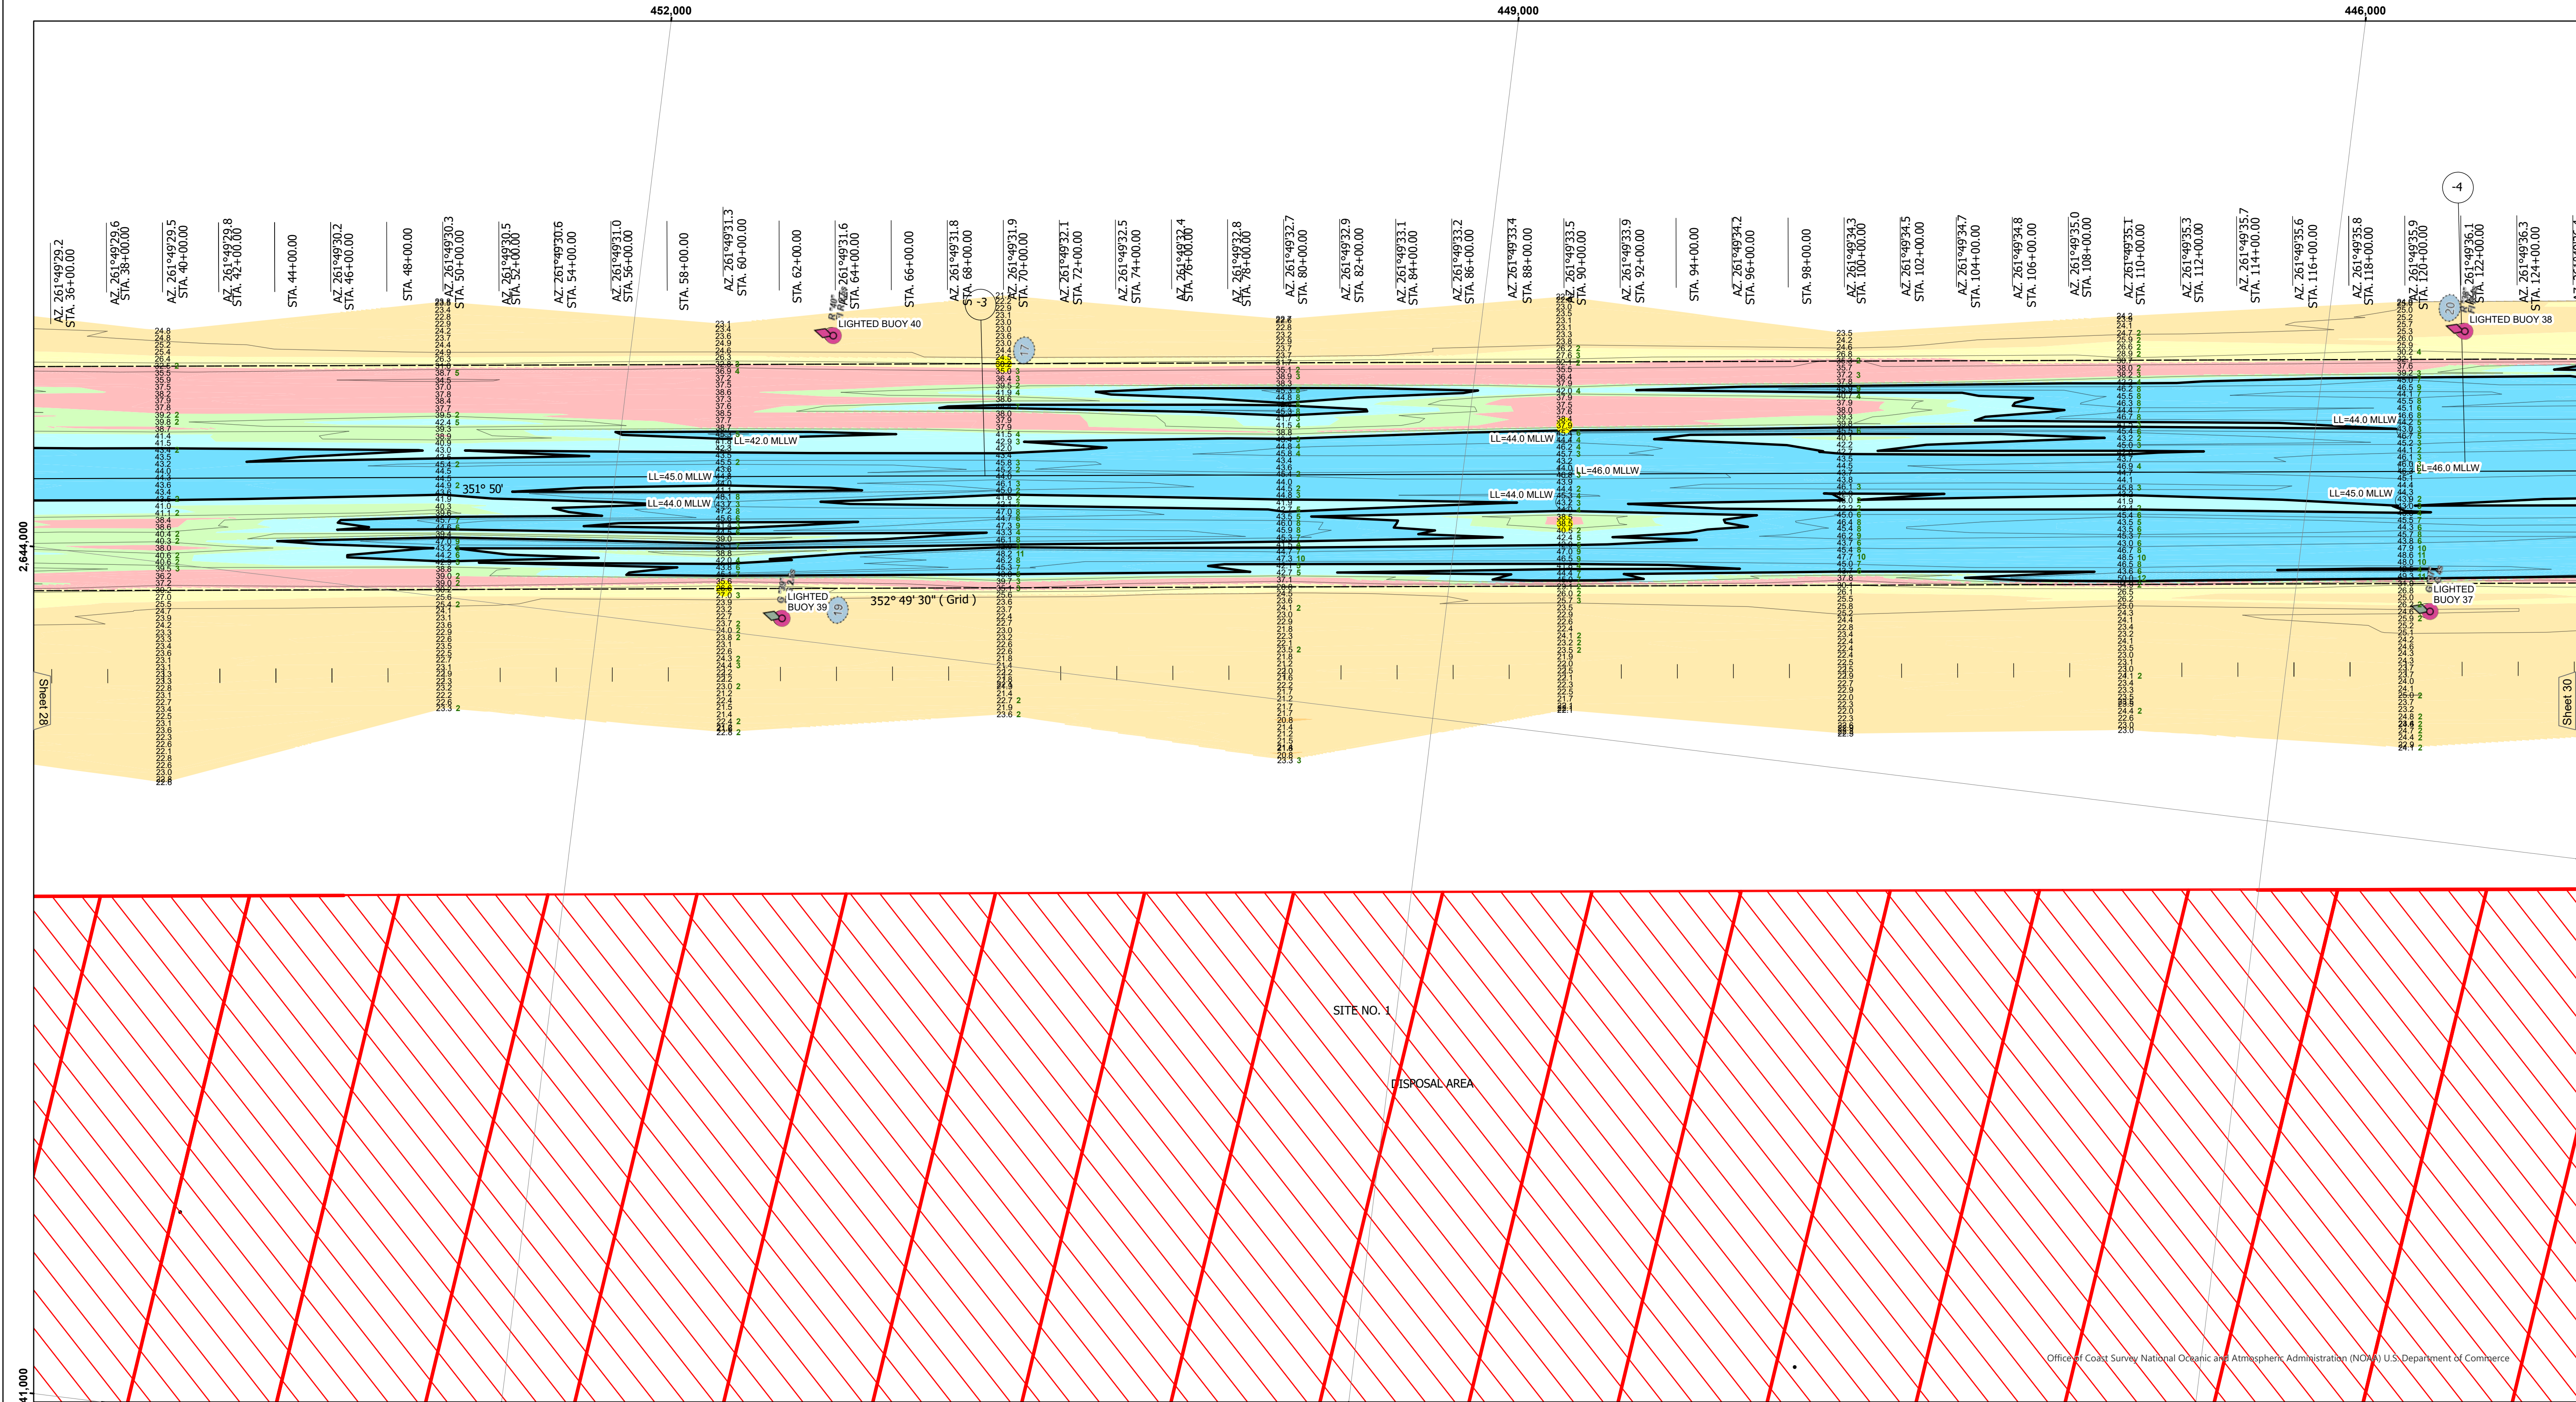

LEGEND

--- Federal Navigation Channel

— Federal Navigation Center Line

— As-built Pipeline/Cable

..... Unconfirmed Pipeline/Cable

— Project Depth Contour

○ Cable Area

□ Anchorage Area

⊗ Obstruction Point

✈ Wrecks-Submerged

3 Fluff Thickness (feet)*

● Shoalest Sounding**

★ Beacon, General

◆ Red Navigation Buoy

◇ Green Navigation Buoy

-16' and above

-16' to -21'

-21' to -26'

-26' to -33'

-33' to -39'

-39' to -41'

-41' to -43'

-43' and below

NOTES

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).
Datum Relationships for gage 73650 as of December 2013:
0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP

Reference is N.O.A.A. Navigation Chart No. 11339.

Gage Reading: CAMERON VRN: 2.0 MLLW AVG

Sea Conditions: CHOP

Vessel Name: MV TECHE

Survey Type: CONDITION

Sounding Frequency***: LOW

0 400 800 1,200 1,600

Feet

NOTES

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW).
Datum Relationships for gage 73650 as of December 2013:
0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP

Reference is N.O.A.A. Navigation Chart No. 11339.

* Difference between high and low frequency elevations where greater than 1.0'.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

U.S. ARMY CORPS OF ENGINEERS			
Submitted:	Surveyed By: SPJS	Plotted By: JH	Checked By: JH
Recommended:	Chief, Survey Section		
Approved:	Chief, Waterways Maintenance Section		

CALCASIEU SHIP CHANNEL

BAR SHEET 29

CR_29_BAR_20250904_CS

04 September 2025

Sheet Reference Number

29 of 53