

# CAMERON PARISH GULF OF MEXICO



**DISCLAIMER**  
The United States Government does not warrant, represent, or guarantee the accuracy, completeness, or timeliness of the information provided herein. The information is provided for informational purposes only and does not constitute an offer of insurance or any other financial product. The information is provided for informational purposes only and does not constitute an offer of insurance or any other financial product.



**U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT**

Submitted By: \_\_\_\_\_  
 Checked By: \_\_\_\_\_  
 Recommended By: \_\_\_\_\_  
 Approved By: \_\_\_\_\_

**CALCASIEU SHIP CHANNEL  
BAR SHEET 33  
CR\_33\_BARX\_20220517\_CS  
17 May 2022**



**Sheet Reference  
Number  
33 of 53**

Revision Number:  
4.3.2020(4/3)

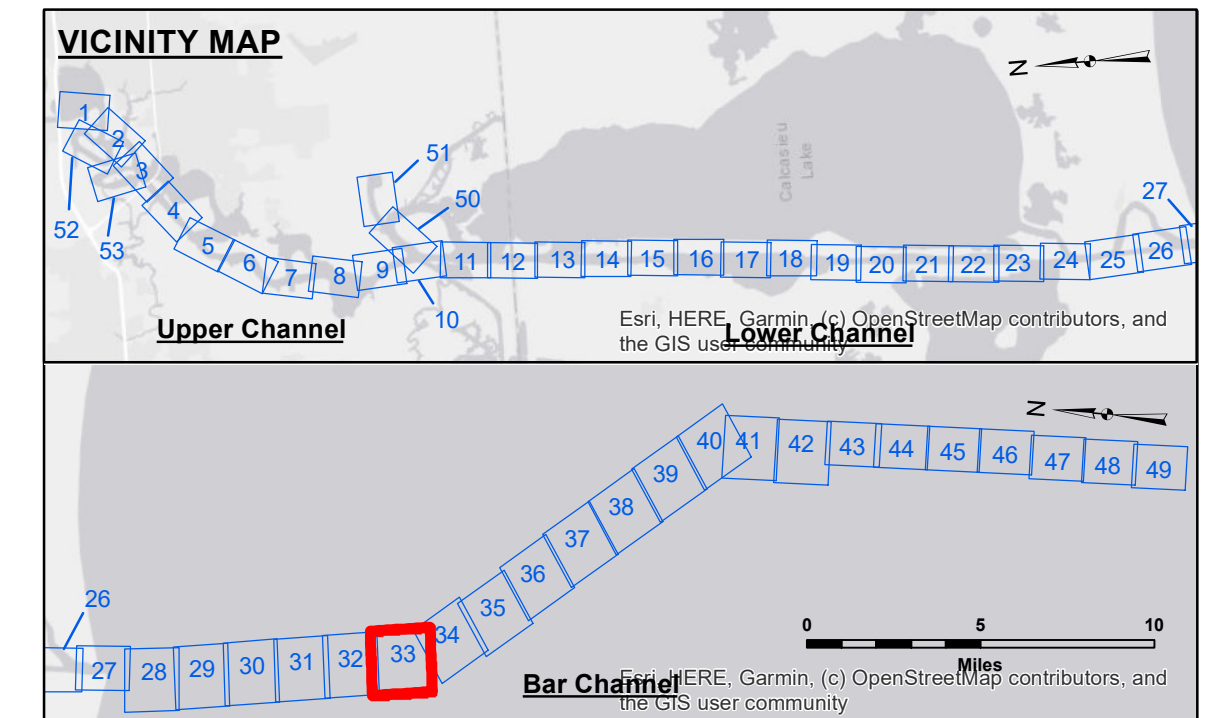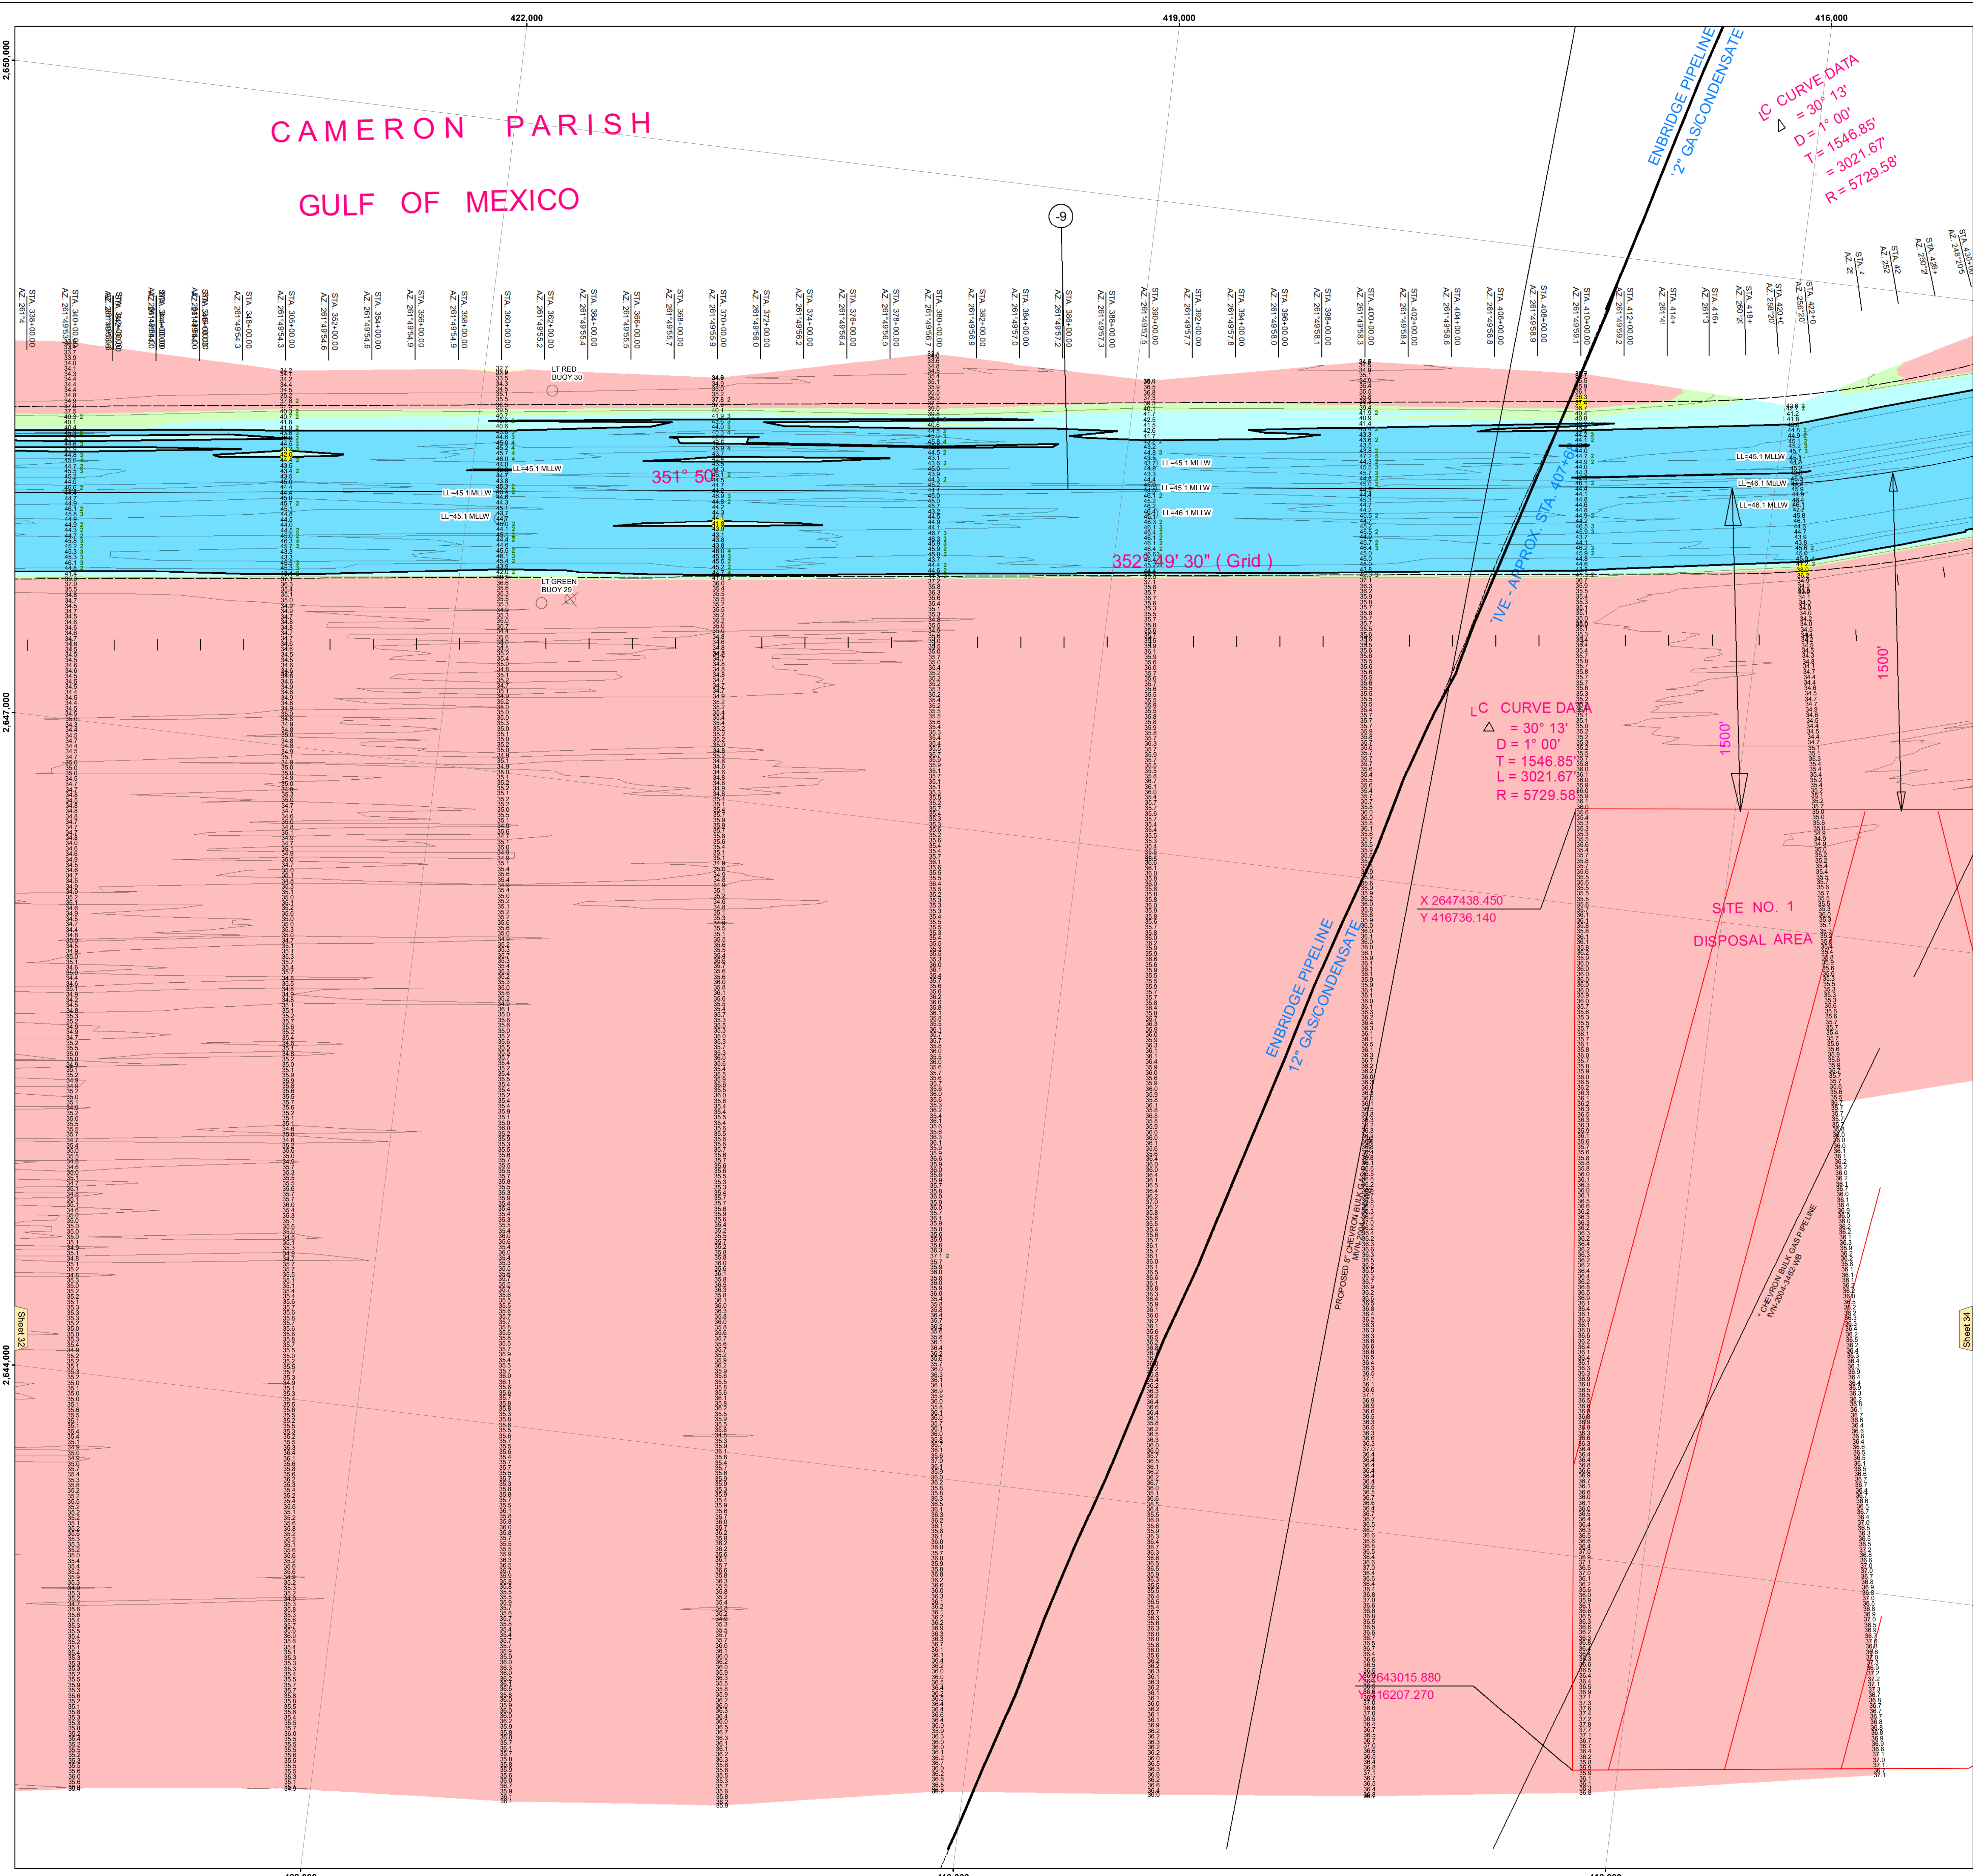

**LEGEND**

--- Federal Navigation Channel	Cable Area	3 Fluff Thickness (feet)*	-16' and above
— Federal Navigation Center Line	Placement Area	● Shoalest Sounding**	-21' to -26'
— As-built Pipeline/Cable	Anchor Area	★ Beacon, General	-26' to -33'
--- Unconfirmed Pipeline/Cable	Obstruction Point	☆ Red Navigation Buoy	-33' to -39'
--- Project Depth Contour	Wrecks-Submerged	◇ Green Navigation Buoy	-39' to -41'
			-41' to -43'
			-43' and below

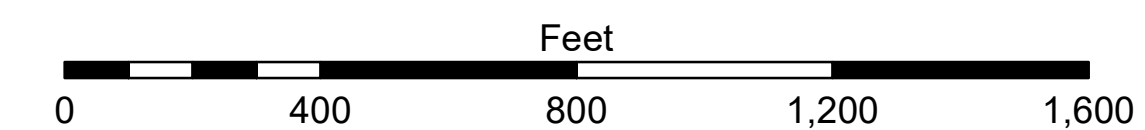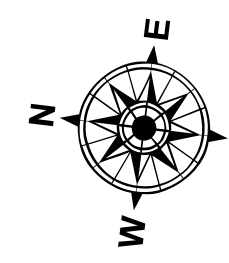

Gage Reading: VRS RTK NTrip: 1.88 MLLW AVG.  
 Sea Conditions: CHOPPY  
 Vessel Name: MV LAFOURCHE  
 Survey Type: CONDITION  
 Sounding Frequency\*\*\*: HIGH/LOW

**NOTES:**  
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum Relationships for gage 73650 as of December 2013: 0.0' NAVD88 (2009 55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG  
 Distances on the Calcasieu River are shown at 1 mile intervals.  
 The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.  
 2015 Aerial Photography data source: NAIP  
 Reference is N.O.A. Navigation Chart No. 11339.  
 \* Difference between high and low frequency elevations where greater than 1.0'.  
 \*\* Shoalest Sounding per Quarter per Reach.  
 \*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.