


**DISCLAIMER**

The United States Government furnishes this data and the recipient accepts and uses them with the express understanding that the United States Government does not warrant, express or implied, the accuracy, completeness, reliability, usability or availability for any particular purpose of the information. The user is responsible for the results and accuracy of the information. The user shall be held responsible for any damage, injury, loss, or liability whatsoever that may result from the use of this information. These data are for informational purposes only and are not to be used for any other purpose. The recipient may not transfer or disseminate these data to others without also transmitting this Disclaimer. The information depicted on this map represents the results of a hydrographic survey conducted under the authority of the U.S. Army Corps of Engineers and is considered to represent the general conditions existing at that time. The information is not to be used for any other purpose. The user is responsible for the results and accuracy of the information. The user shall be held responsible for any damage, injury, loss, or liability whatsoever that may result from the use of this information. These data are for informational purposes only and are not to be used for any other purpose. The recipient may not transfer or disseminate these data to others without also transmitting this Disclaimer. The information depicted on this map represents the results of a hydrographic survey conducted under the authority of the U.S. Army Corps of Engineers and is considered to represent the general conditions existing at that time. The information is not to be used for any other purpose. The user is responsible for the results and accuracy of the information. The user shall be held responsible for any damage, injury, loss, or liability whatsoever that may result from the use of this information. These data are for informational purposes only and are not to be used for any other purpose. The recipient may not transfer or disseminate these data to others without also transmitting this Disclaimer. The information depicted on this map represents the results of a hydrographic survey conducted under the authority of the U.S. Army Corps of Engineers and is considered to represent the general conditions existing at that time. The information is not to be used for any other purpose. The user is responsible for the results and accuracy of the information. The user shall be held responsible for any damage, injury, loss, or liability whatsoever that may result from the use of this information. These data are for informational purposes only and are not to be used for any other purpose. The recipient may not transfer or disseminate these data to others without also transmitting this Disclaimer.

Submitted:	Surveyed By:	SR, JH
	Plotted By:	BD
	Recommended:	Chief, Survey Section
	Approved:	Chief, Waterways Maintenance Section

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT

**CALCASIEU SHIP CHANNEL  
BAR SHEET 34  
CR\_34\_BAR\_20180122\_CS  
22 January 2018**

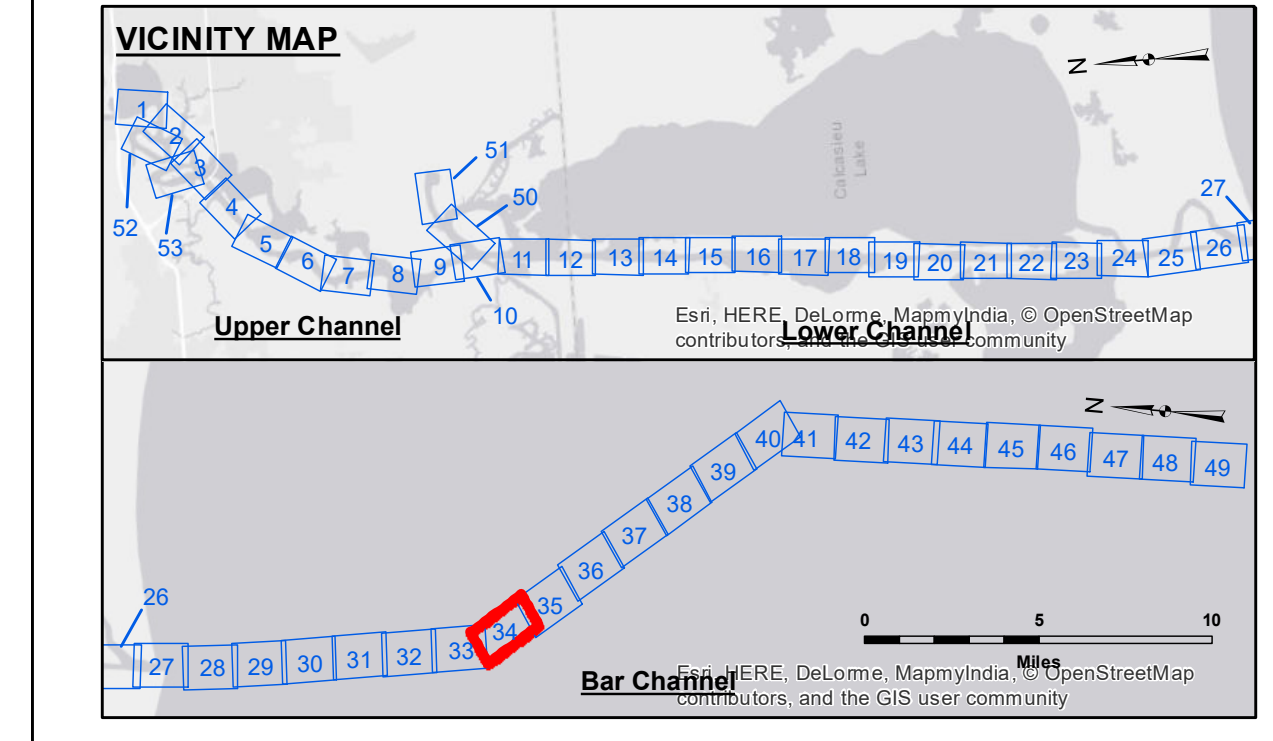

**LEGEND**

Federal Navigation Channel	Cable Area	Fluff Thickness (feet)*	-15' and above
Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-15' to -20'
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-20' to -25'
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy	-25' to -32'
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy	-32' to -38'
			-38' to -40'
			-40' to -42'
			-42' and below

**NOTES:**

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for gage 73650 as of December 2013: 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP

Reference is N.O.A.A. Navigation Chart No. 11339.

\* Difference between high and low frequency elevations where greater than 1.0'.  
\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: CAMERON: 1.52 MLG  
Sea Conditions: 2-3'  
Vessel Name: MV TECHE  
Survey Type: CONDITION  
Sounding Frequency\*\*\*: LOW

Feet  
0 400 800 1,200 1,600