


DISCLAIMER: The United States Government furnishes no warranty, expressed or implied, for the use of the data herein. The user assumes all liability for any use of the data herein. The user is responsible for the accuracy and reliability of the data herein. The user is responsible for the accuracy and reliability of the data herein. The user is responsible for the accuracy and reliability of the data herein.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		
Submitted:	Surveys By: SR, JH	Checked By: JAF
Recommended:	Project By: BTD	Approved:
	Chief, Survey Section	Chief, Waterways Maintenance Section

CALCASIEU SHIP CHANNEL
BAR SHEET 35
CR_35_BARX_20150812
12 August 2015


Sheet Reference Number
35 of 53

Revision Number:
3.0-20150200

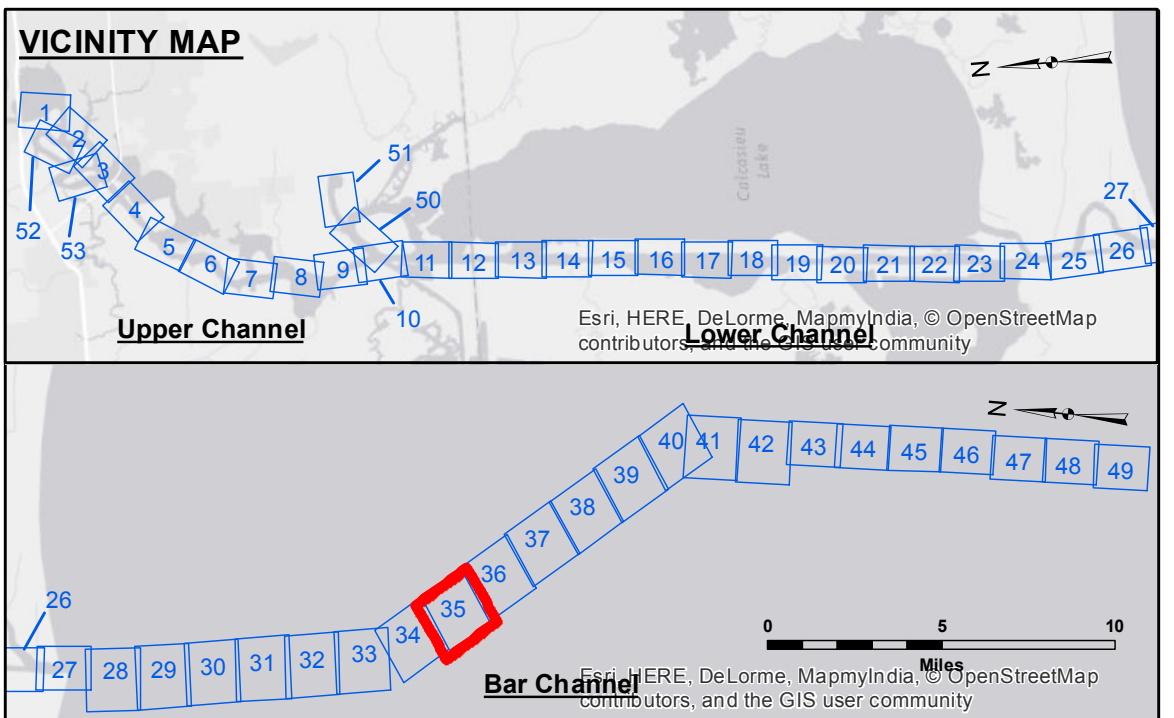

LEGEND

--- Federal Navigation Channel	□ Cable Area	□ Borrow Area	■ -15' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -15' to -20'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -20' to -25'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	★ Red Navigation Buoy	■ -25' to -32'
— Project Depth Contour	⚓ Wrecks-Submerged	★ Green Navigation Buoy	■ -32' to -38'
			■ -38' to -40'
			■ -40' to -42'
			■ -42' and below

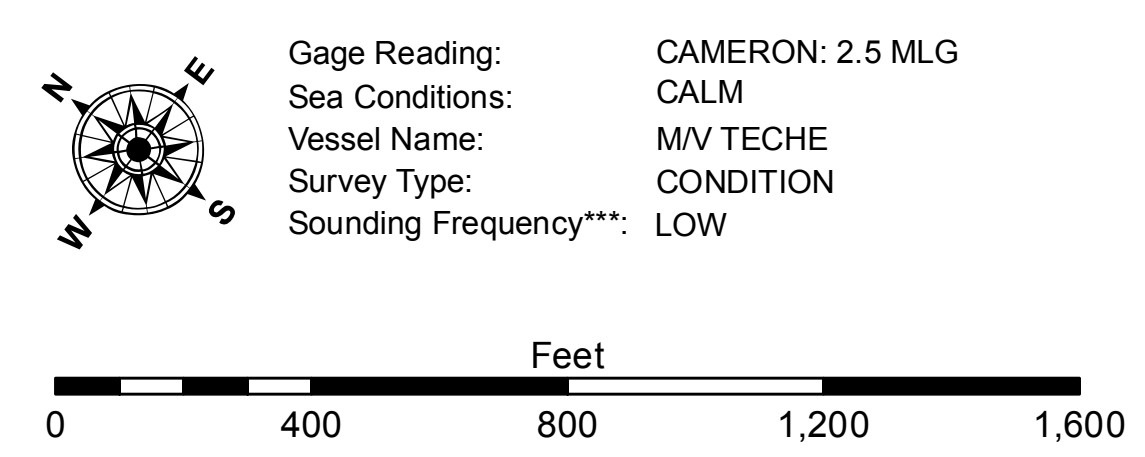

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).
Datum Relationships for gage 73650 as of December 2013:
0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2010 Aerial Photography data source: NAIP
Reference is N.O.A. Navigation Chart No. 11339.
** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fishometer settings.