

CAMERON PARISH
GULF OF MEXICO

SITE NO. 2
DISPOSAL AREA




US Army Corps of Engineers District: CEMVN

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is not intended to be used for any purpose other than that for which it was collected. The user is responsible for the results and accuracy of the data. The Corps of Engineers does not assume liability for any errors or omissions in the data. Data Collection: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging, sedimentation, and changes in the bathymetry of the waterway. The Corps of Engineers does not assume liability for any errors or omissions in the data. The Corps of Engineers does not assume liability for any errors or omissions in the data. The Corps of Engineers does not assume liability for any errors or omissions in the data. The Corps of Engineers does not assume liability for any errors or omissions in the data.

Submitted By:	SVG
Plotted By:	JH
Checked By:	JH


CALCASIEU SHIP CHANNEL
BAR SHEET 36
CR_36_BAR_20210917_CS_POSTIDA
17 September 2021

Sheet Reference Number
36 of 53

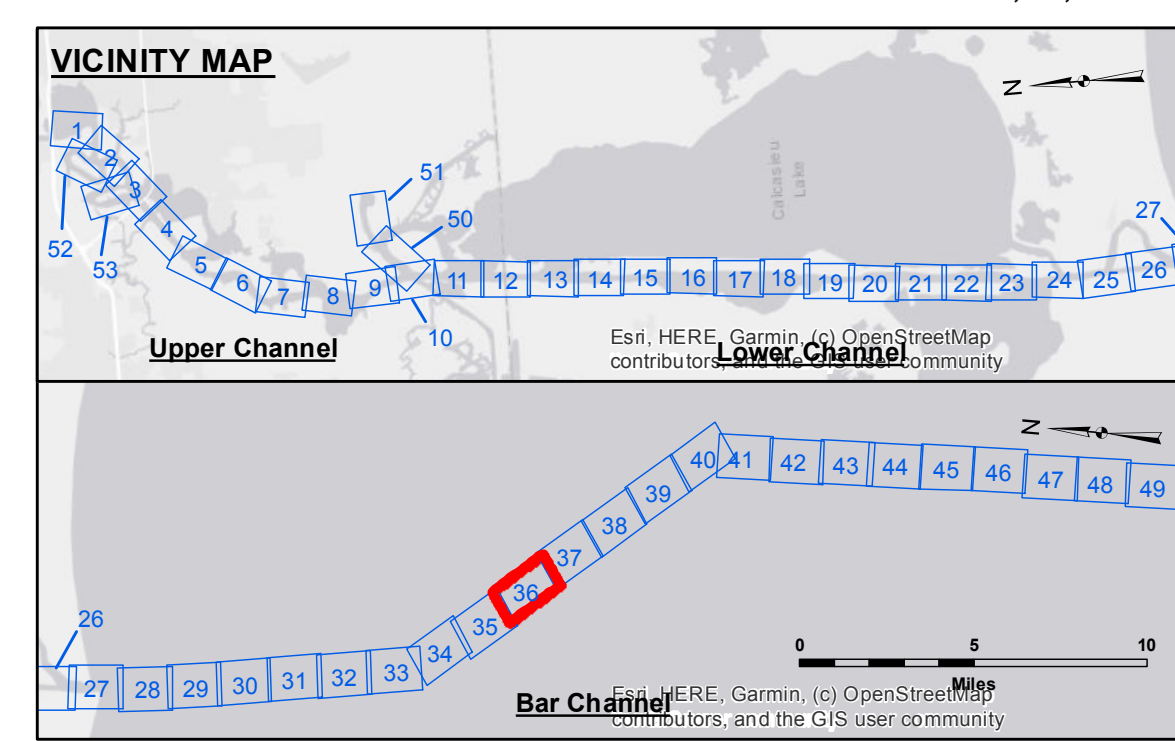


LEGEND

Federal Navigation Channel	Cable Area	Fluff Thickness (feet)*	-16' and above
Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-16' to -21'
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-21' to -26'
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy	-26' to -33'
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy	-33' to -39'
			-39' to -41'
			-41' to -43'
			-43' and below



Gage Reading: NOAA CALC PASS: 2.2' MLLW AVG
 Sea Conditions: CALM
 Vessel Name: SV TURPIN
 Survey Type: CONDITION
 Sounding Frequency***: HIGH

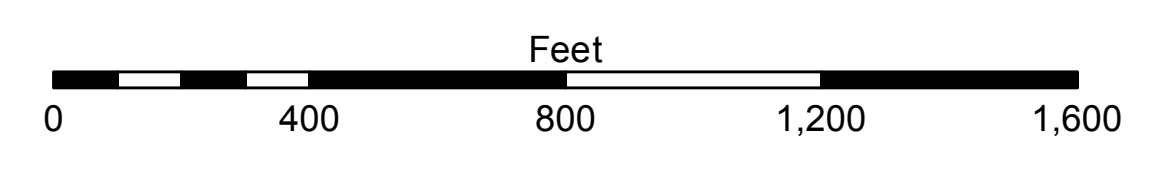

NOTES:
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum Relationships for gage 73650 as of December 2013: 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG
 Distances on the Calcasieu River are shown at 1 mile intervals.
 The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.
 2015 Aerial Photography data source: NAIP
 Reference is N.O.A.A. Navigation Chart No. 11339.
 * Difference between high and low frequency elevations where greater than 1.0'.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.