


CAMERON PARISH
GULF OF MEXICO

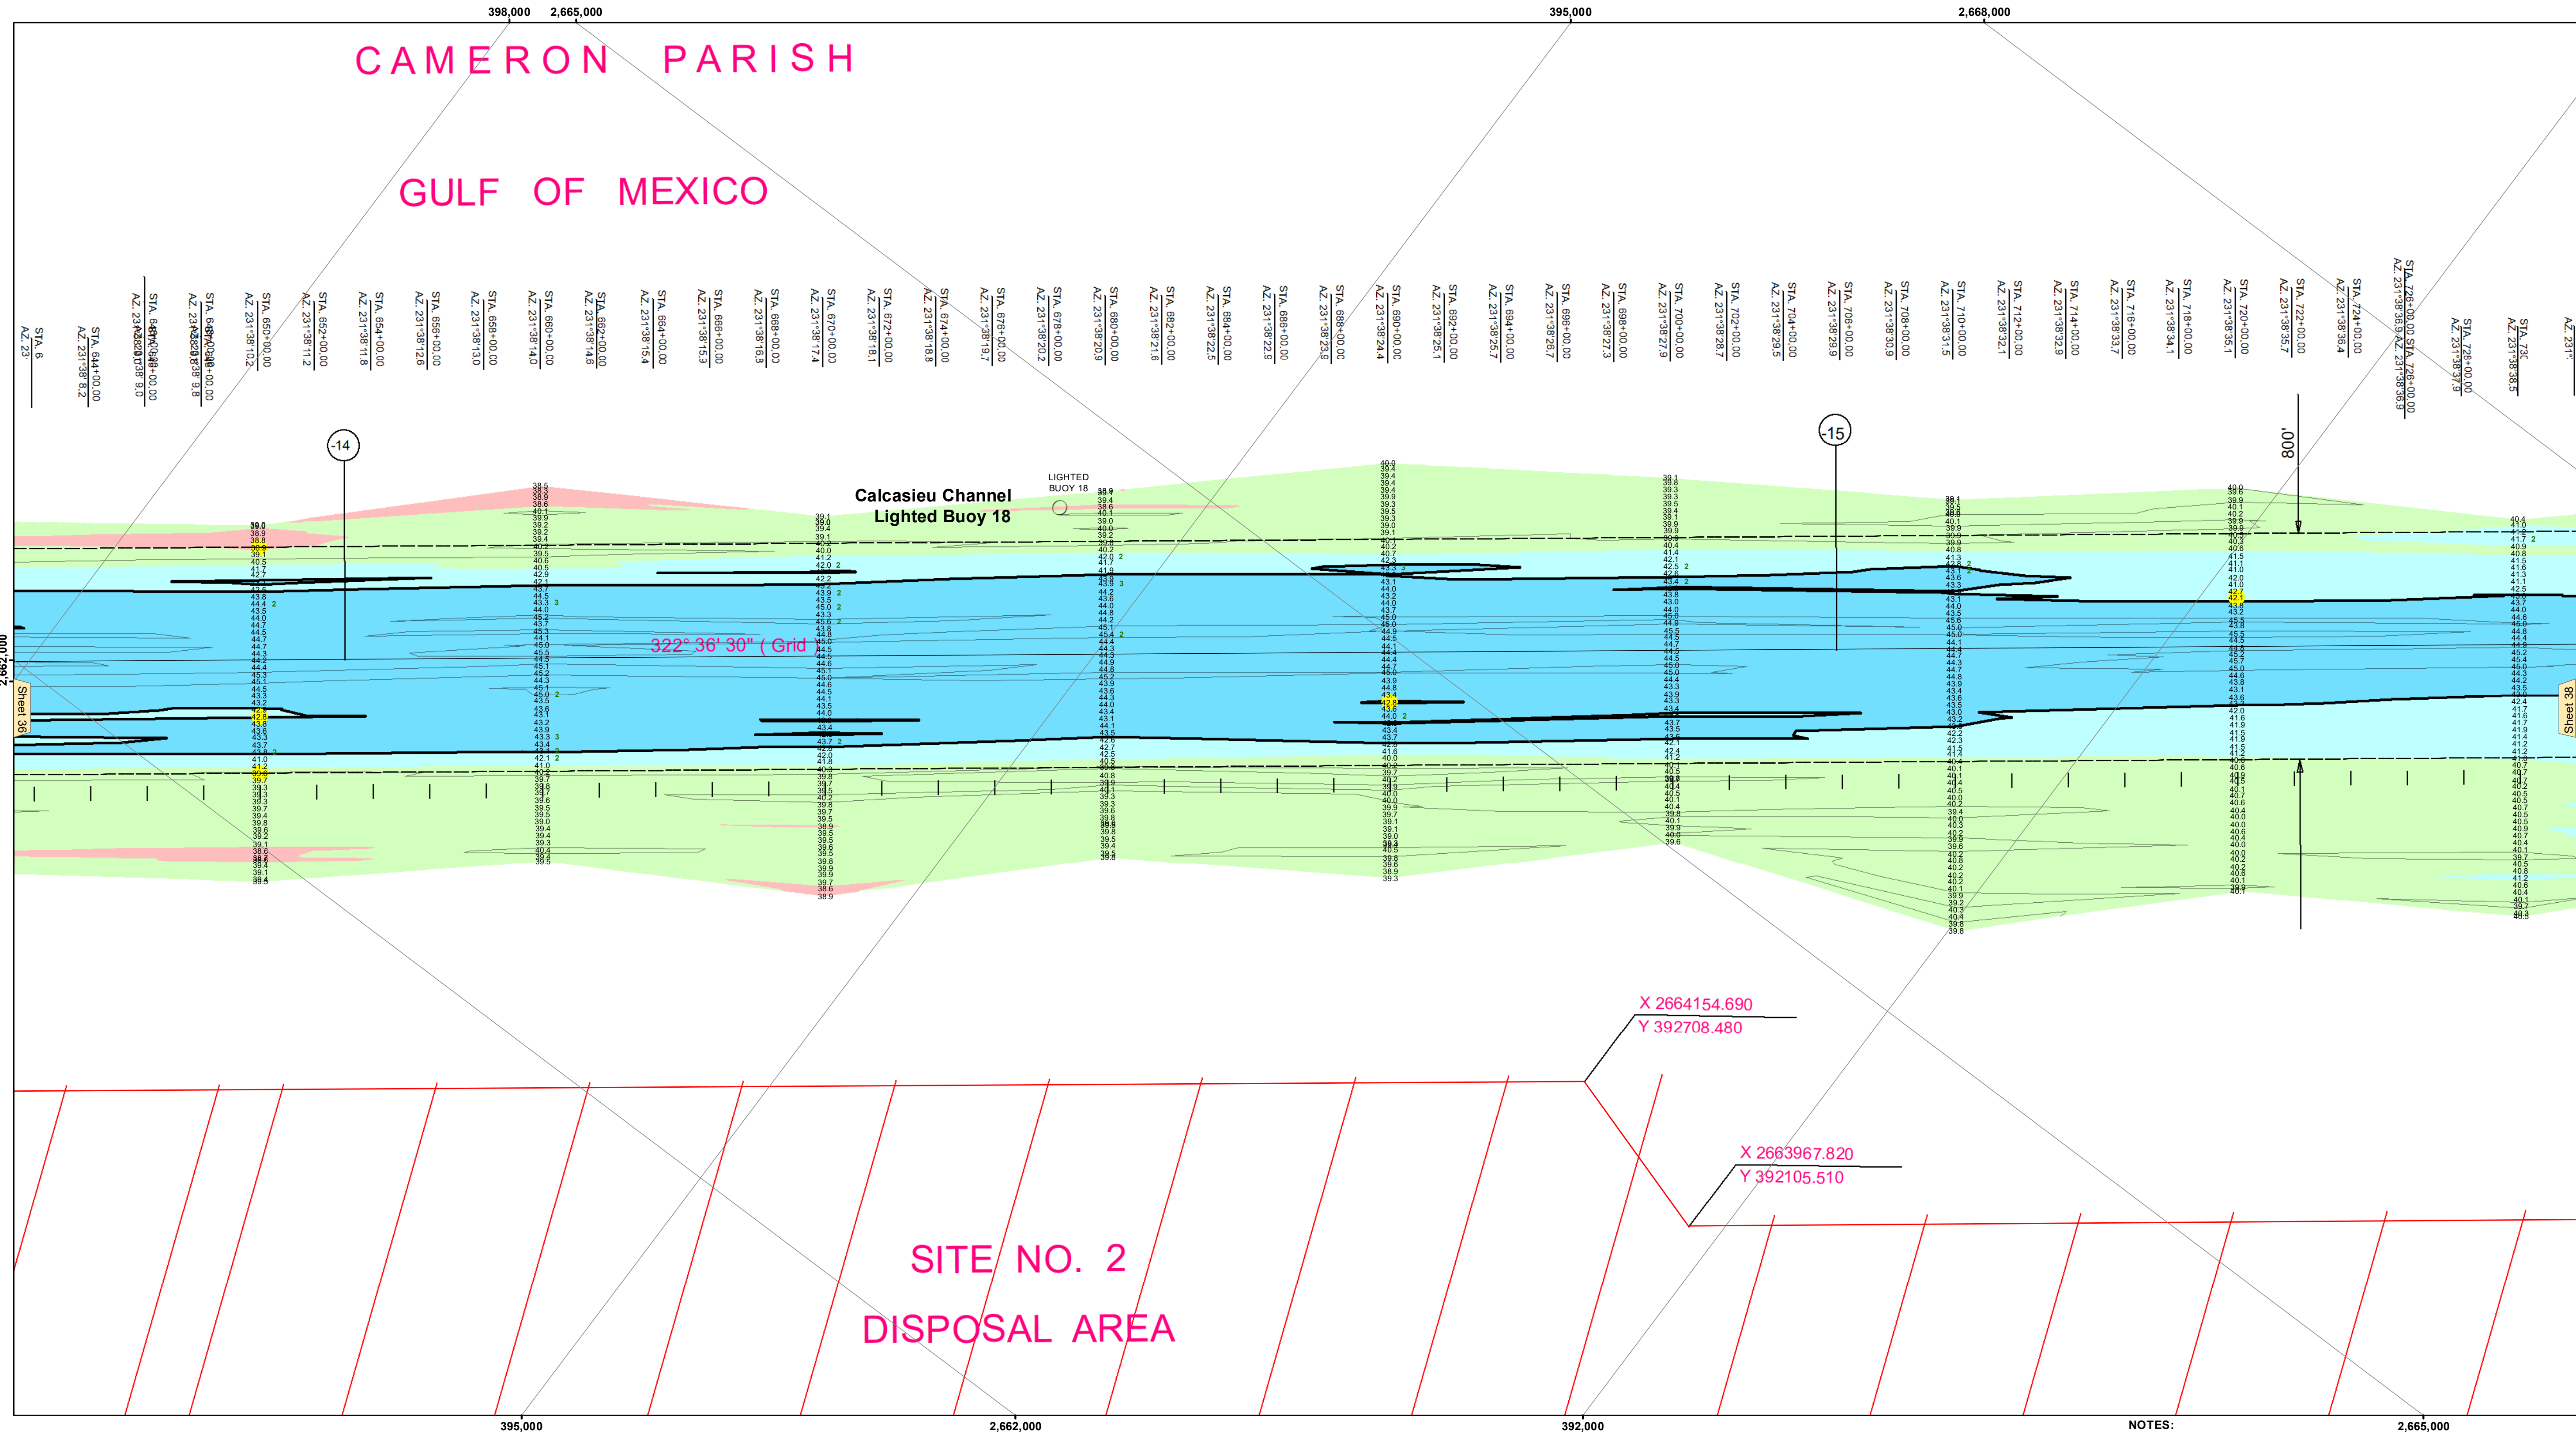


Distribution Labels: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is not to be used for any other purpose. The user is responsible for the accuracy and reliability of the data. The data is provided for informational purposes only. The US Army Corps of Engineers is not responsible for the use of the data. The data is provided as a service to the user. The user is responsible for the accuracy and reliability of the data. The data is provided for informational purposes only. The US Army Corps of Engineers is not responsible for the use of the data. The data is provided as a service to the user. The user is responsible for the accuracy and reliability of the data.

The information depicted on this map represents the results of a survey conducted on or about the date indicated. It is not to be used for any other purpose. The user is responsible for the accuracy and reliability of the data. The data is provided for informational purposes only. The US Army Corps of Engineers is not responsible for the use of the data. The data is provided as a service to the user. The user is responsible for the accuracy and reliability of the data.

Submitted:	Surveyed By: SP-JS
Recommended:	Plotted By: JH
Approved:	Checked By: JH
Chief, Survey Section	
Chief, Waterways Maintenance Section	

CALCASIEU SHIP CHANNEL
BAR SHEET 37
CR_37_BAR_20240418_AD
18 April 2024

Sheet Reference Number
37 of 53

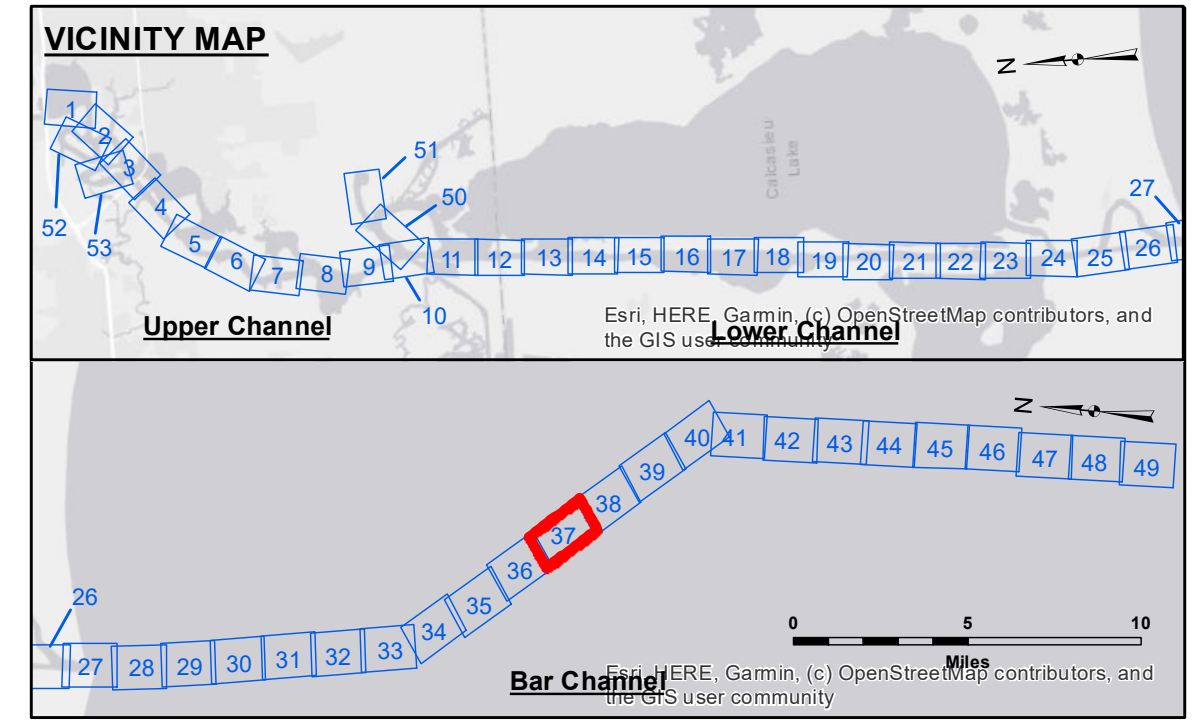

LEGEND

Federal Navigation Channel	Cable Area	Fluff Thickness (feet)*	-16' and above
Federal Navigation Center Line	Placement Area	Shoalest Sounding**	-16' to -21'
As-built Pipeline/Cable	Anchorage Area	Beacon, General	-21' to -26'
Unconfirmed Pipeline/Cable	Obstruction Point	Red Navigation Buoy	-26' to -33'
Project Depth Contour	Wrecks-Submerged	Green Navigation Buoy	-33' to -39'
			-39' to -41'
			-41' to -43'
			-43' and below

Gage Reading: CAMERON: 1.67 MLLW AVG
Sea Conditions: CHOPPY
Vessel Name: MV TECHE
Survey Type: CONDITION
Sounding Frequency***: LOW

Feet
0 400 800 1,200 1,600

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum Relationships for gage 73650 as of December 2013: 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG
Distances on the Calcasieu River are shown at 1 mile intervals.
The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.
2015 Aerial Photography data source: NAIP
Reference is N.O.A.A. Navigation Chart No. 11339.
* Difference between high and low frequency elevations where greater than 1.0'.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.