


**LEGEND**

--- Federal Navigation Channel	○ Cable Area	3 Fluff Thickness (feet)*	Red -16' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	Orange -16' to -21'
— As-built Pipeline/Cable	⊗ Anchorage Area	★ Beacon, General	Yellow -21' to -26'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	Light Green -26' to -33'
— Project Depth Contour	⊗ Wrecks-Submerged	◆ Green Navigation Buoy	Light Blue -33' to -39'
			Light Green -39' to -41'
			Light Blue -41' to -43'
			Dark Blue -43' and below

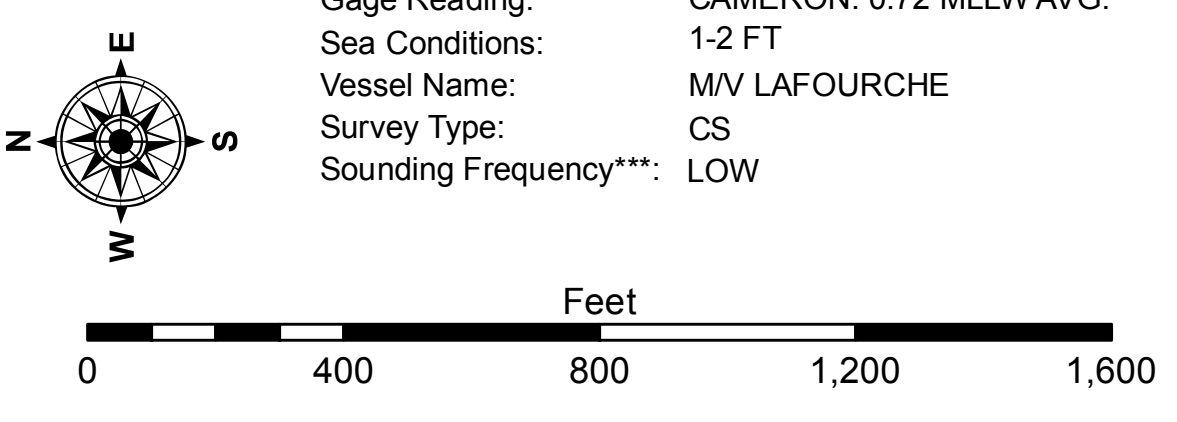

**NOTES:**

Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: 1-2 FT

Sea Conditions: M/V LAFORCHE

Vessel Name: CS

Survey Type: LOW

Sounding Frequency\*\*\*: LOW

Gage Reading: CAMERON: 0.72 MLLW AVG.

Datum Relationships for gage 73650 as of December 2013: 0.0' NAVD88 (2009.55) = 1.3' MLLW = 2.3' MLG or 0.0' MLLW = 1.0' MLG

Distances on the Calcasieu River are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE survey crews.

2015 Aerial Photography data source: NAIP

Reference is N.O.A.A. Navigation Chart No. 11339.

\* Difference between high and low frequency elevations where greater than 1.0'.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.



**DISCLAIMER:**

The information depicted on this map represents the results of a survey conducted by the United States Army Corps of Engineers. The information is provided for informational purposes only and is not intended to be used for any other purpose. The user is responsible for the accuracy, completeness, and reliability of the information. The user is advised to consult the appropriate specifications and standards for the information. The user is advised to consult the appropriate specifications and standards for the information. The user is advised to consult the appropriate specifications and standards for the information.

**U.S. ARMY CORPS OF ENGINEERS**  
**NEW ORLEANS DISTRICT**

Submitted:	Surveyed By: DJS/SPS
Recommended:	Plotted By: BD
Checked By: AC	Checked By: AC

**CALCASIEU SHIP CHANNEL**  
**BAR SHEET 42**  
**CR\_42\_BAR\_20210104\_CS**  
**04 January 2021**

**Sheet Reference Number**  
**42 of 53**