


**LEGEND**

- - - Federal Navigation Channel	○ Cable Area	3 Fluff Thickness (feet)*	-16' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	-16' to -21'
— As-built Pipeline/Cable	⊗ Anchorage Area	☆ Beacon, General	-21' to -26'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	-26' to -33'
— Project Depth Contour	⊗ Wrecks-Submerged	◆ Green Navigation Buoy	-33' to -39'
			-39' to -41'
			-41' to -43'
			-43' and below



**NOTES:**  
 Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
 Vertical Datum: Soundings are shown in feet and indicate depths below Mean Lower Low Water Datum (MLLW). Datum Relationships for gage 73585 as of December 2013: 0.0' NAVD83 (OPUS 2013) = 0.8' MLLW = 1.8' MLG or 0.0' MLLW = 1.0' MLG  
 Distances on the Calcasieu River are shown at 1 mile intervals.  
 The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE survey crews.  
 2015 Aerial Photography data source: NAIP  
 Reference is N.O.A.A. Navigation Chart No. 11339.  
 \* Difference between high and low frequency elevations where greater than 1.0'.  
 \*\* Shoalest Sounding per Quarter per Reach.  
 \*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

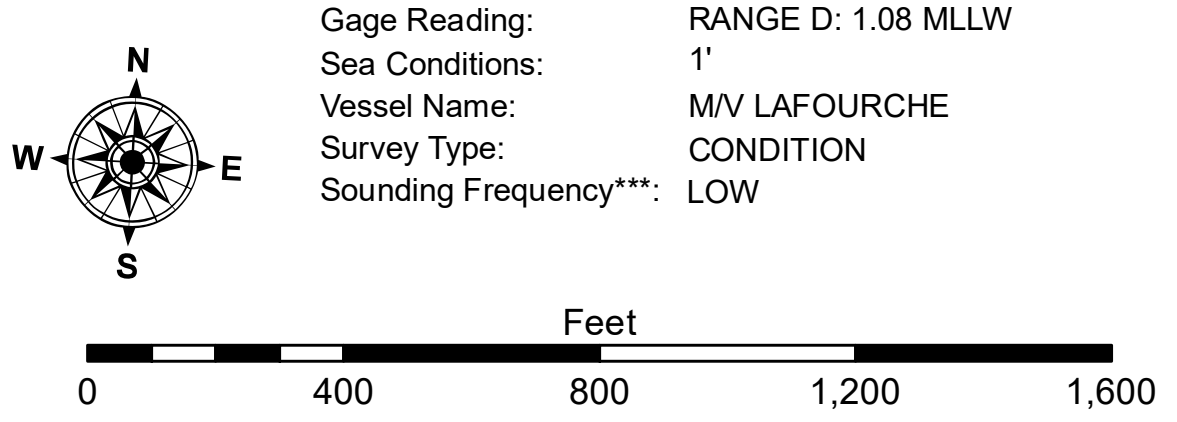

**DISCLAIMER**  
 The information depicted on this map represents the results of a hydrographic survey conducted by the U.S. Army Corps of Engineers. The data represents the results of a collection of soundings for a specific US Army Corps of Engineers project and is not intended to be used for any purpose other than that for which it was collected. The user is responsible for the accuracy, completeness, reliability, usability or suitability of the data for any purpose other than that for which it was collected. The user is responsible for the accuracy, completeness, reliability, usability or suitability of the data for any purpose other than that for which it was collected. The user is responsible for the accuracy, completeness, reliability, usability or suitability of the data for any purpose other than that for which it was collected. The user is responsible for the accuracy, completeness, reliability, usability or suitability of the data for any purpose other than that for which it was collected.

U.S. ARMY CORPS OF ENGINEERS  
 NEW ORLEANS DISTRICT

Submitted:	Surveyed By: SPS:JH
Recommended:	Plotted By: BD
Approved:	Checked By: AC

Chief, Waterways Maintenance Section

**CALCASIEU SHIP CHANNEL  
 DEVIL'S ELBOW - SH 2  
 CR\_51\_DE2\_20180430\_CS  
 30 April 2018**

**Sheet Reference Number  
 51 of 53**

Revision Number:  
 3.13-20180111