


Accession Control: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are not to be used for any purpose other than that for which they were prepared or applied. The user is responsible for the results. The user is responsible for the results. The user is responsible for the results. The user is responsible for the results. The user is responsible for the results.

Submitted:	Surveyed By: LLB & DBD
Recommended: Chief Survey Section	Plotted By: TSS
Approved: Chief Waterways Maintenance Section	Checked By: MSK

**GULF INTRACOASTAL WATERWAY
CHANDELEUR ALT. ROUTE
GC_06_B2G_20200917_CS_POSTSTORM_PRO
17 September 2020**

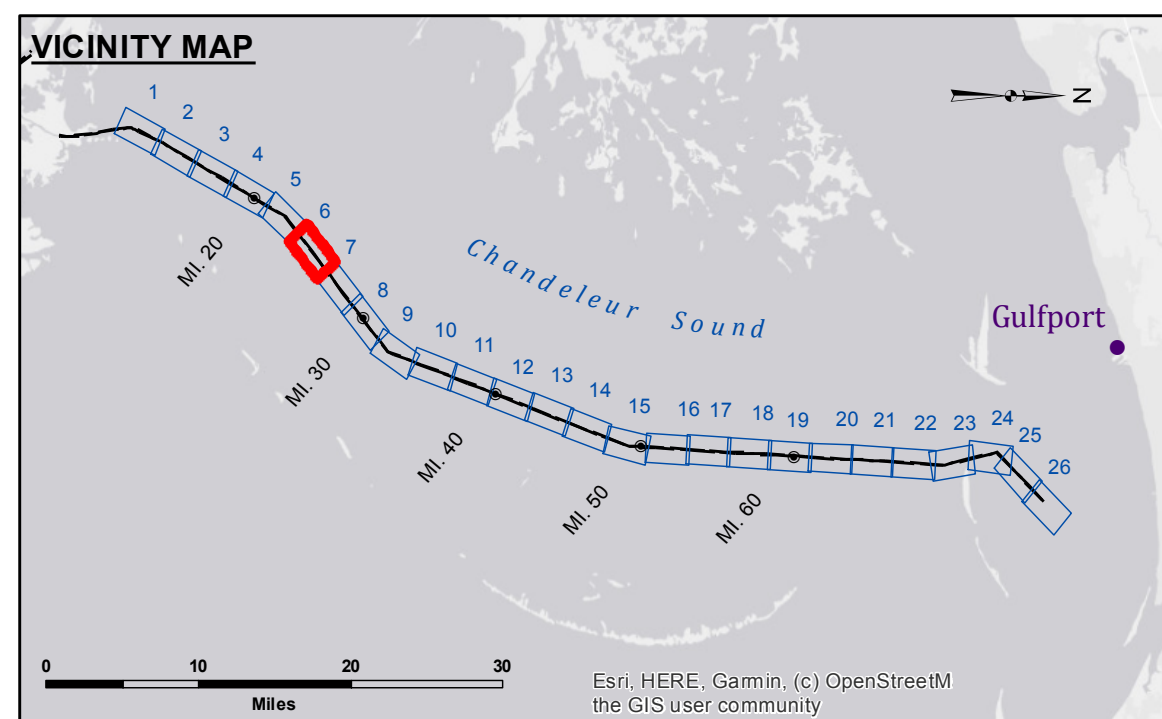

LEGEND

- Federal Navigation Channel
- Federal Navigation Center Line
- As-built Pipeline/Cable
- Unconfirmed Pipeline/Cable
- Project Depth Contour
- Cable Area
- Placement Area
- Anchorage Area
- ⊗ Obstruction Point
- ✈ Wrecks-Submerged
- Borrow Area
- Shoalest Sounding**
- ☆ Beacon, General
- ♦ Red Navigation Buoy
- ◆ Green Navigation Buoy
- -12' and above
- -12' and below

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW).

Datum relationships at Baptiste Collette as of 01 May 2013:
0.0' MLLW (2002-2006) = 0.0' NAVD88 (2009.55) = 3.5' MLG

Distances on the GIWW, Chandeleur to Gulfport Route are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2013 Aerial Photography data source: GEOCLIP, Atlantic Group, LLC.

Reference is N.O.A. Navigation Chart No. 11353.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: 1.84 MLLW @ DM 16 @ 0930
Sea Conditions: SLIGHT CHOP 1'- 2' SEAS
Vessel Name: BLANCHARD
Survey Type: CONDITION, SB
Sounding Frequency***: LOW