


DISCLAIMER

The United States Government furnishes this data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were collected, and that the accuracy, completeness, reliability, usability or suitability for any particular purpose of the data is not guaranteed by the United States Government. The user is responsible for the results of any use of the data, and the United States Government shall not be liable for any loss or damage, including consequential, special or exemplary damages, that may result from the use of the data. The information depicted on this map represents the results of a survey conducted on the date shown on the map. The information is considered to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT			
Submitted:	SR:SP:AO	Plotted By:	AO
Recommended:	Chart Survey Section	Checked By:	AO
Approved:	Chart Waterways Maintenance Section		

**GULF INTRACOASTAL WATERWAY
CHANDELEUR ALT. ROUTE
GC_22_B2G_20200714_CS**

14 July 2020

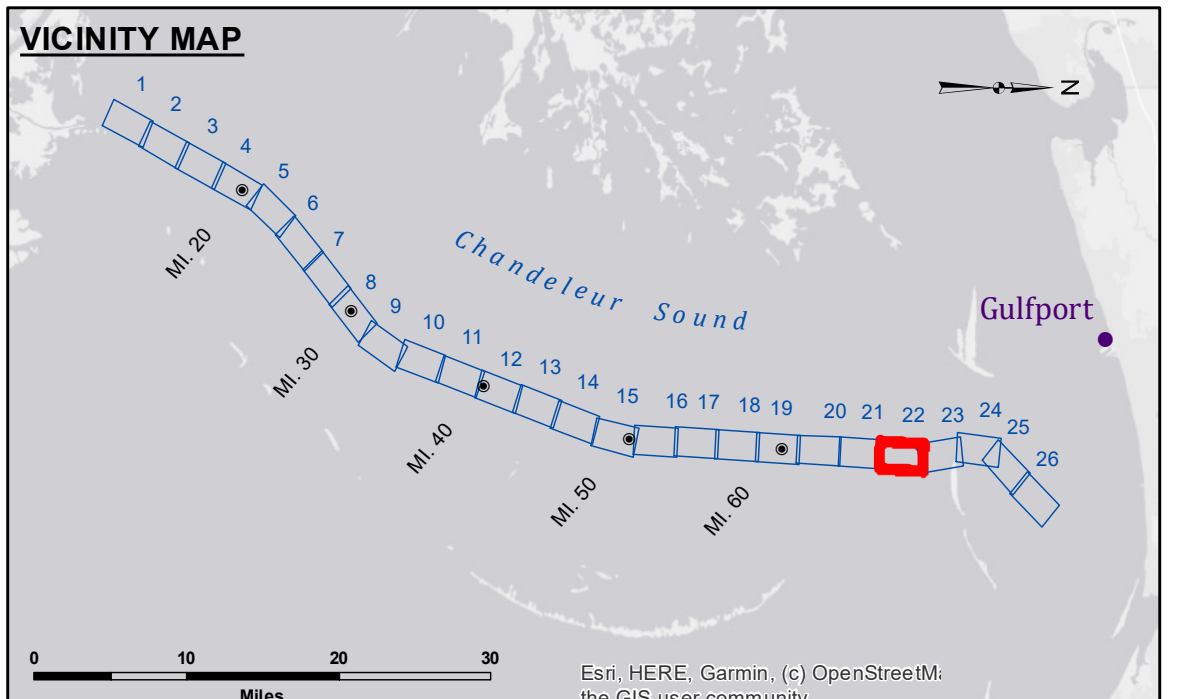

LEGEND

--- Federal Navigation Channel	● Cable Area	□ Borrow Area
— Federal Navigation Center Line	■ Placement Area	● Shoalest Sounding**
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	♦ Red Navigation Buoy
— Project Depth Contour	⚓ Wrecks-Submerged	♦ Green Navigation Buoy

Gage Reading: DM 16: 0.5 MLLW AVG
 Sea Conditions: CALM
 Vessel Name: MV TECHE
 Survey Type: CS
 Sounding Frequency***: HIGH

Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Lower Low Water (MLLW).

Datum relationships at Baptiste Collette as of 01 May 2013:
 0.0' MLLW (2002-2006) = 0.0' NAVD88 (2009.55) = 3.5' MLG

Distances on the G.W.W. Chandeleur to Gulfport Route are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard.

2013 Aerial Photography data source: GEOCLIP, Atlantic Group, LLC.
 Reference is N.O.A. Navigation Chart No. 11373.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Scale: 0 to 2,500 Feet