

DISTRICT: U.S. ARMY CORPS OF ENGINEERS, NEW ORLEANS DISTRICT


Access: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were originally prepared. The user is responsible for the results of any use of the data for other than its intended purpose.

Data: Hydrographic survey data is subject to change and may not be current. The user is responsible for the results of any use of the data for other than its intended purpose.

Disclaimer: The information depicted on this map represents the results of a survey conducted on or about the date of the survey. The Corps of Engineers does not warrant the accuracy of the information depicted on this map and does not assume any liability for errors or omissions in the information depicted on this map.

Submitted:	Surveyed By: SPPM
Recommended: Chet, Survey Section	Plotted By: AO
Approved: Chet, Waterways Maintenance Section	Checked By: AC

GULF INTRACOASTAL WATERWAY
MICHOUID CANAL
GE_06_MRG_20161209
09 December 2016

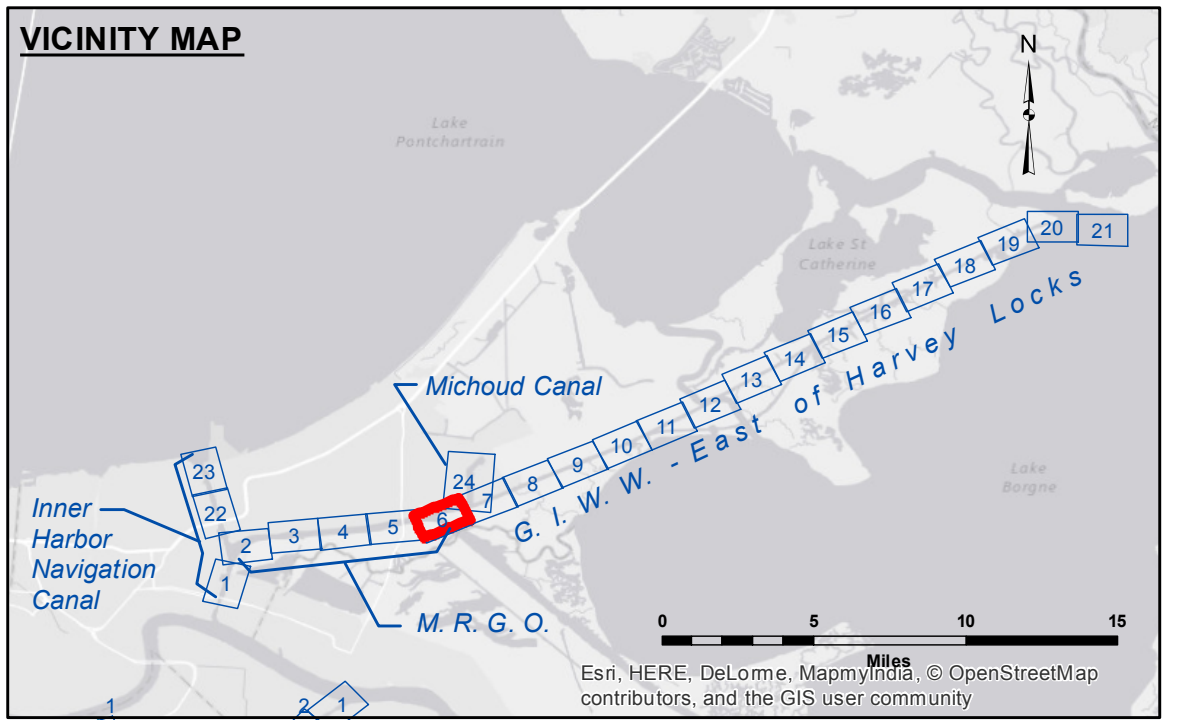

LEGEND

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -33' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -33' to -36'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -36' to -38'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	□ -38' and below
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG).

The location of navigation aids are base on and provided by the U.S. Coast Guard.

2010 Aerial Photography data source: NAIP. 1998 DOQQ imagery shown in green from USGS.

Reference is N.O.A. Navigation Chart No. 11367 and 11368.

** Shoalest Sounding per Quarter Per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: SURGE BARRIER W: 2.5 MLG
 Sea Conditions: CALM
 Vessel Name: OB-167
 Survey Type: CONDITION
 Sounding Frequency***: LOW

Feet
 0 500 1,000