



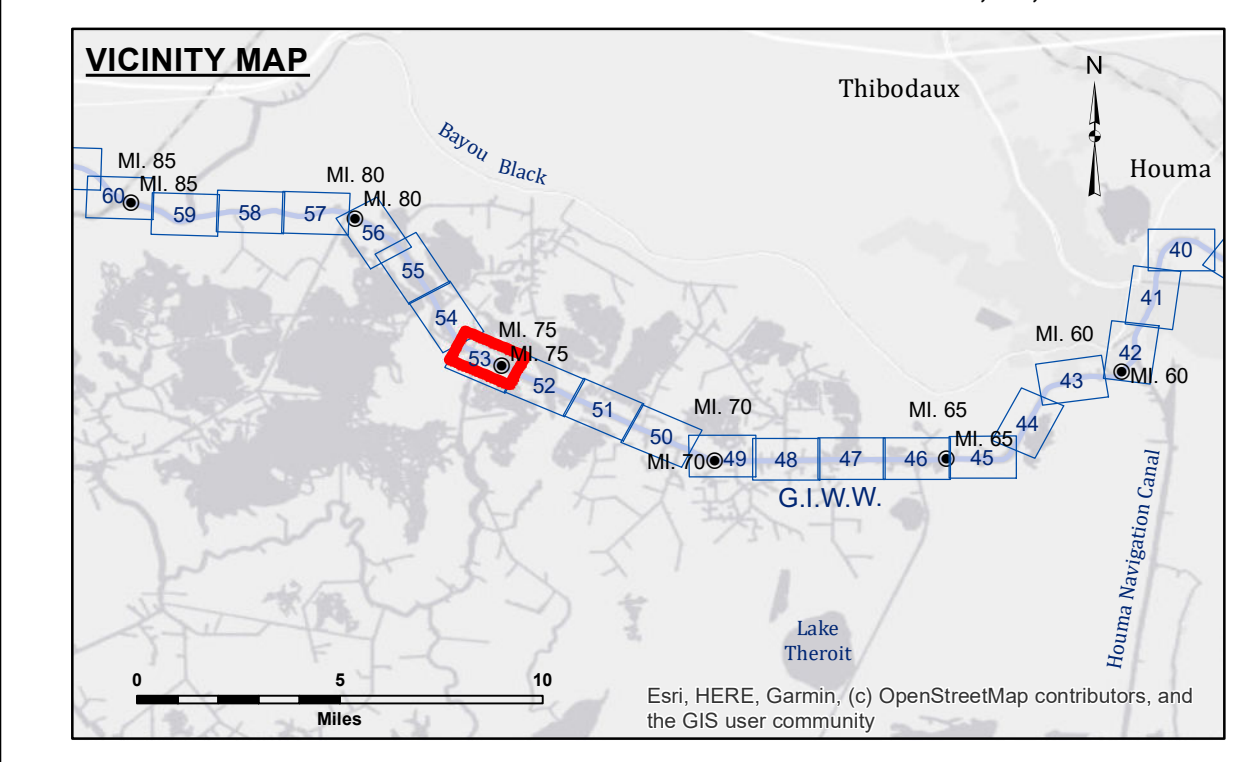

Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, content, time and accuracy specifications. The user is responsible for the results and any application of the data for other than its intended purpose. Data Constants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to changing bathymetry, sedimentation, and other factors. The user is responsible for the results of the data and any application of the data for other than its intended purpose. The information depicted on this map represents the results of a survey conducted on the ground and is not to be considered a representation of the general condition existing at that time.

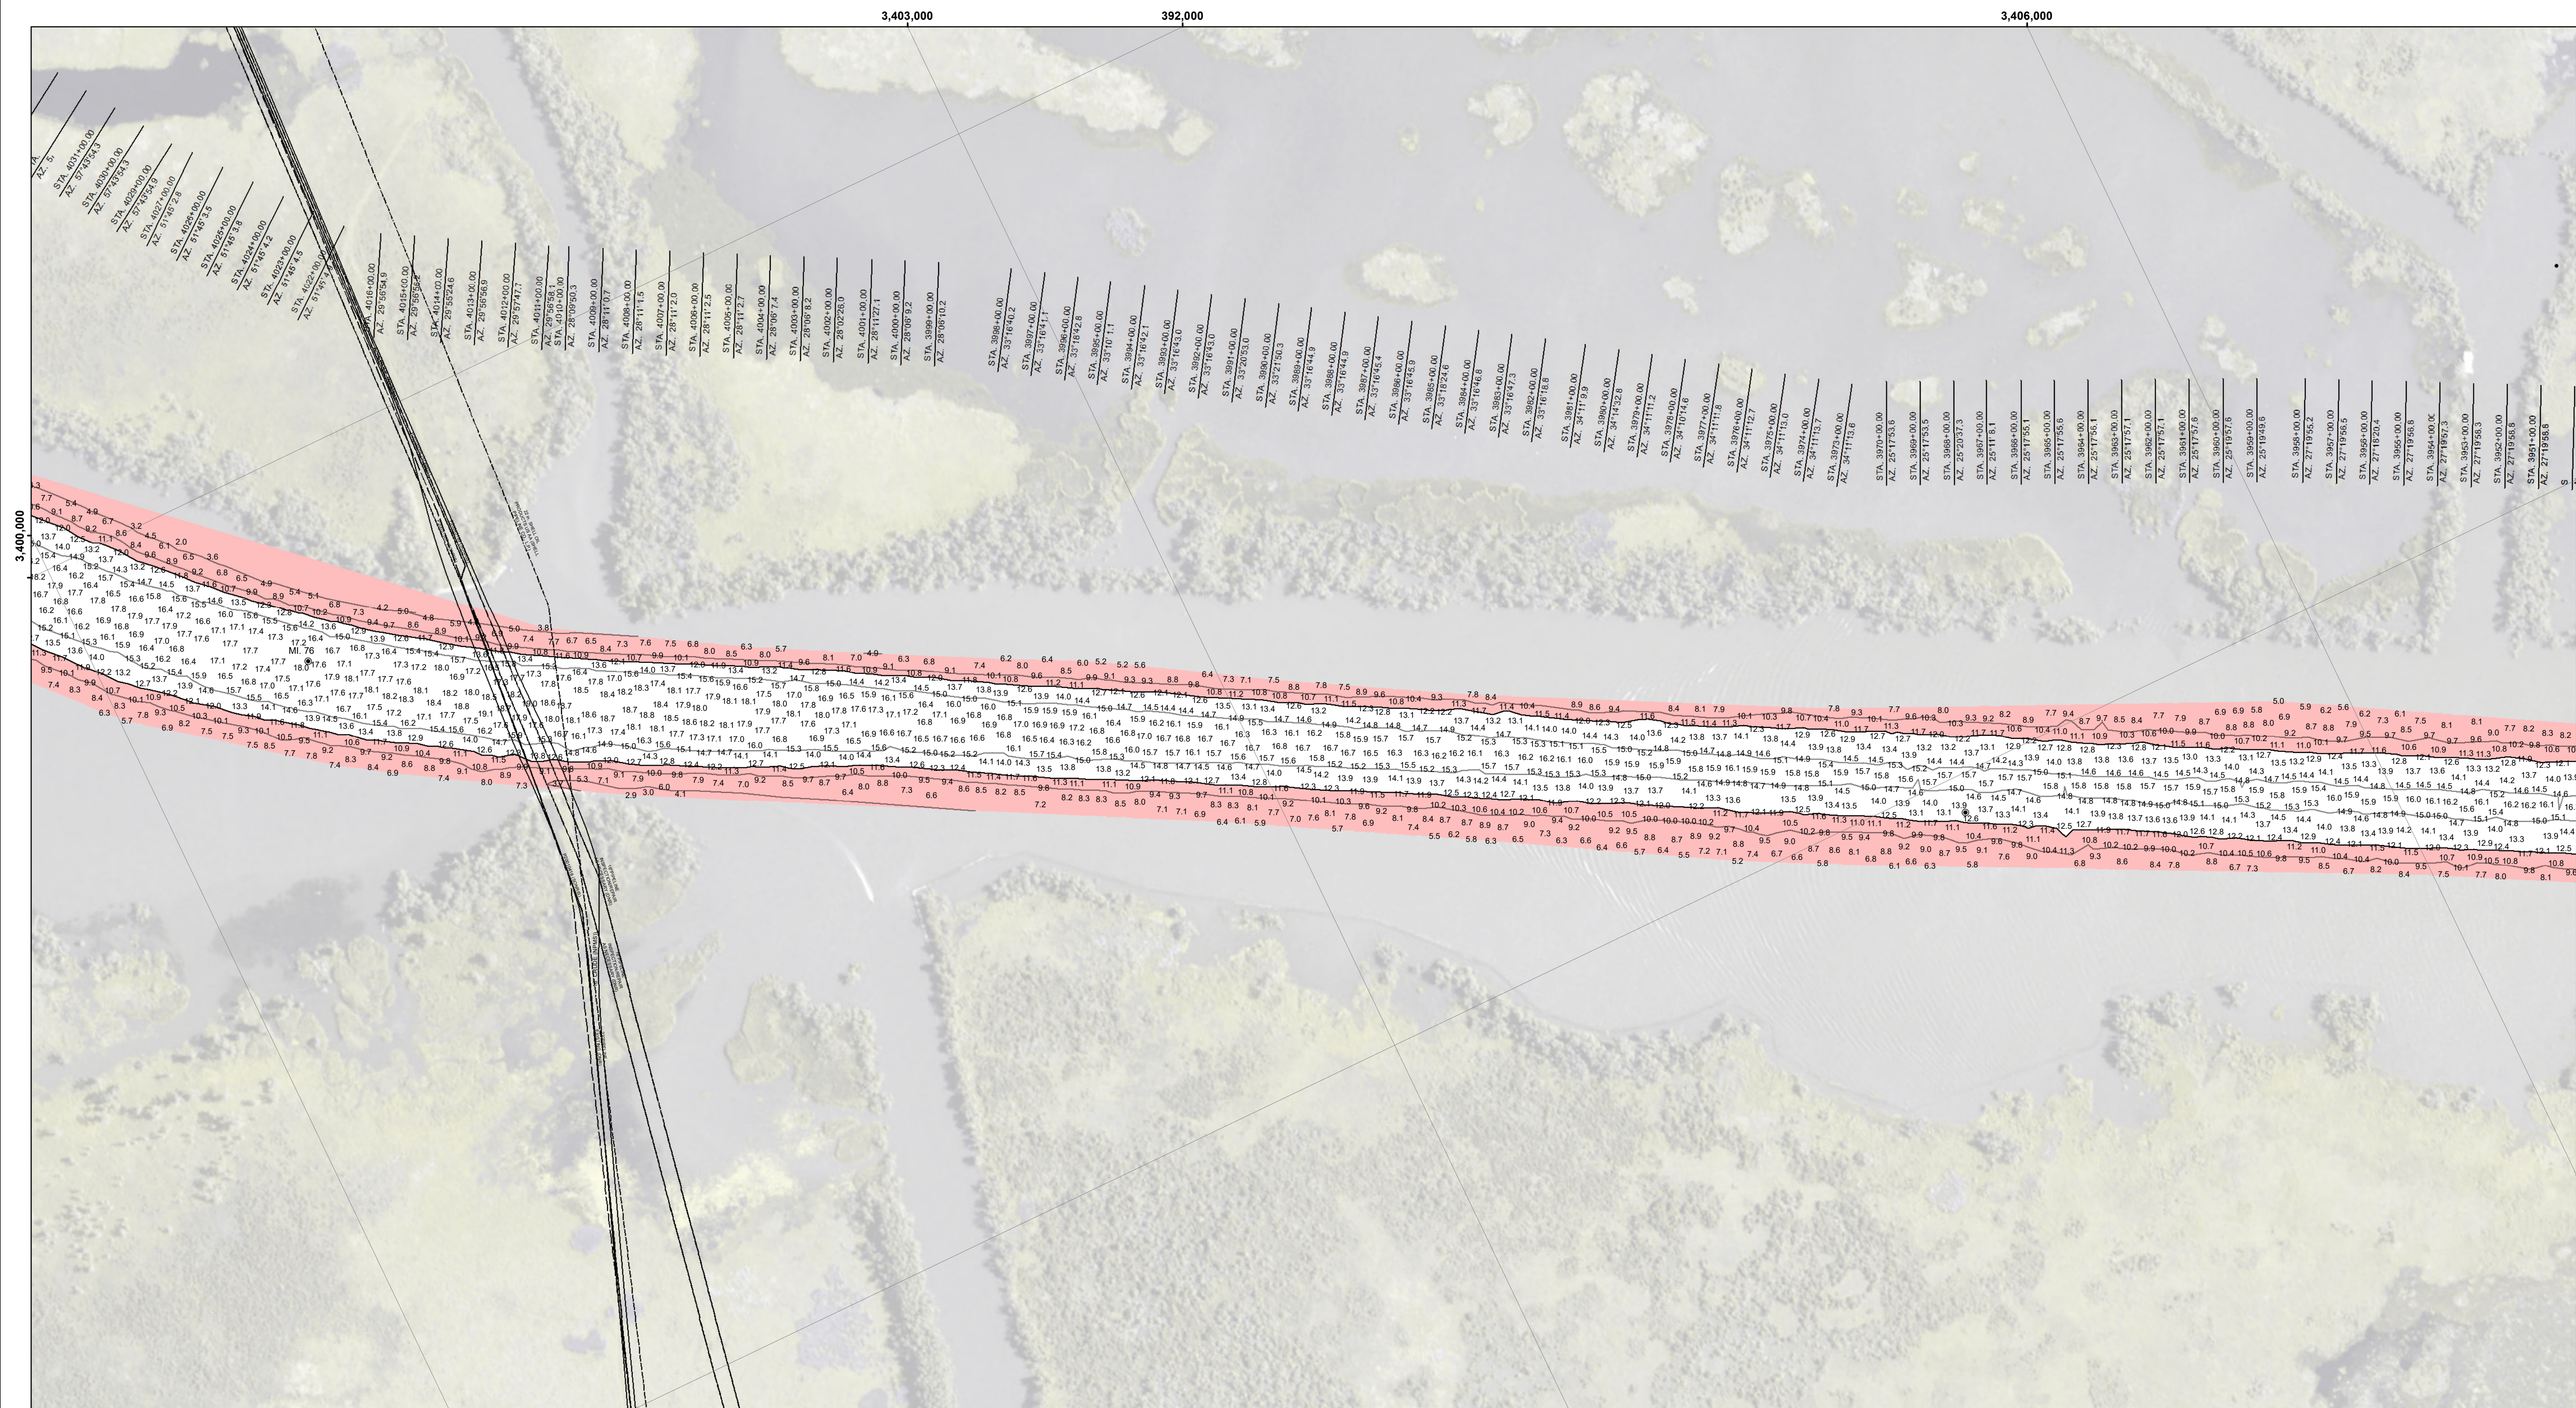

LEGEND table with symbols for Federal Navigation Channel, Cable Area, Borrow Area, Shoalest Sounding, Beacon, Red Navigation Buoy, Green Navigation Buoy, Placement Area, Anchorage Area, Obstruction Point, Wrecks-Submerged, and Project Depth Contour.

Navigation information including Gage Reading, Sea Conditions, Vessel Name, Survey Type, Sounding Frequency, and a scale bar in feet (0, 500, 1,000).

NOTES: Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Vertical Datum: Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Mile markers on the G.I.W.W. are shown in one mile intervals. The location of navigation aids are base on and provided by the U.S. Coast Guard. 2017 Aerial Photography data source: NAIP, 1998 DOQQ imagery shown in green from USGS. Reference is N.O.A.A. Navigation Chart No. 11355. *** Shoalest Sounding per Quarter per Reach. *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Administrative table with columns: Submitted, Recommended, Approved, Surveyed By (CHUSTZ), Plotted By (JH), Checked By (JH).

GULF INTRACOASTAL WATERWAY HOUMA NAV TO CHENE G_53_H2C_20240913_CS_5X5_POSTSTORM 13 September 2024

Sheet Reference Number 53 of 191