


Accession: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that they are for informational purposes only. The accuracy, reliability, usability or suitability for any particular purpose of the information is not guaranteed. The user is responsible for the results of their use. The application of the data for other than its intended purpose is not recommended. The user is responsible for the results of their use. The user is responsible for the results of their use. The user is responsible for the results of their use.

Submitted:	DR,JA
Recommended:	BD
Approved:	AC

GULF INTRACOASTAL WATERWAY
20 GRAND POINT
GL_67_BBW_20170323_CS
23 March 2017

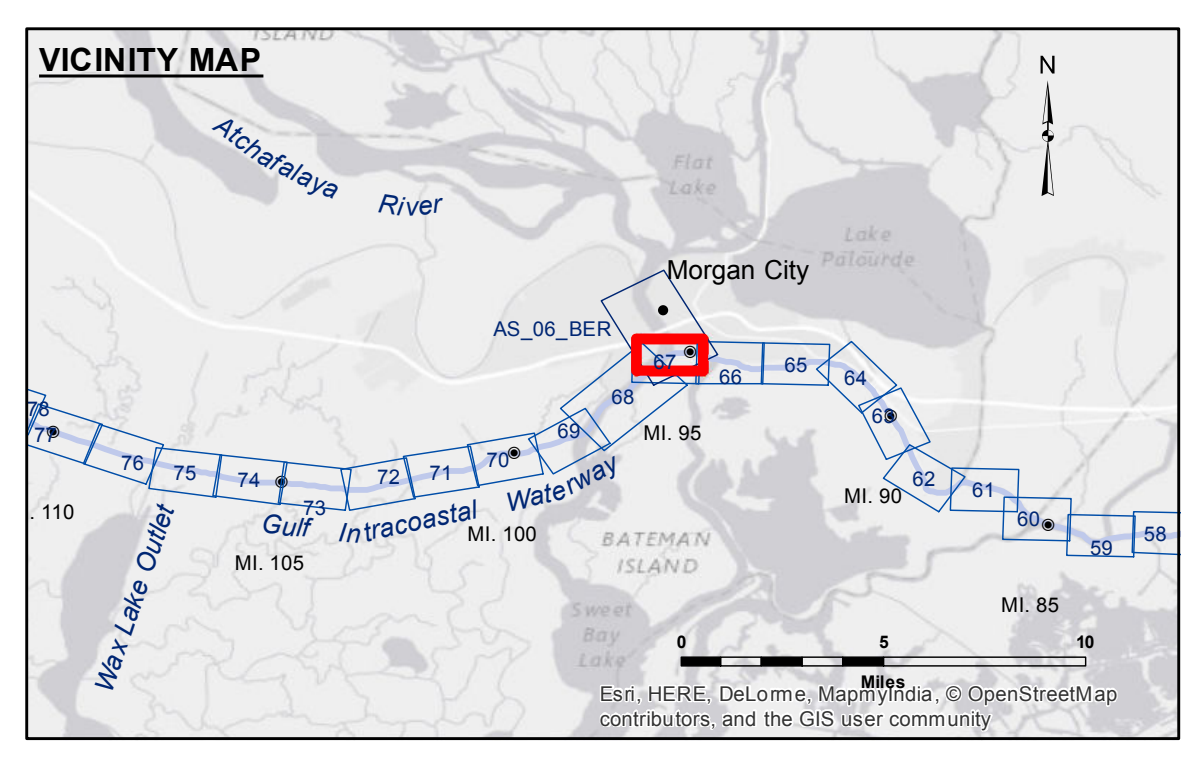

LEGEND	
--- Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	□ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point
— Project Depth Contour	✦ Wrecks-Submerged
□ Borrow Area	★ Beacon, General
● Shoalest Sounding**	◆ Red Navigation Buoy
★ Beacon, General	◆ Green Navigation Buoy
■ -12' and above	
□ -12' and below	

Gage Reading: MORGAN CITY: 3.80 MLG
Sea Conditions: CALM
Vessel Name: M/V BURRWOOD
Survey Type: CONDITION
Sounding Frequency*:** LOW

NOTES:
 Horizontal Coordinate System:
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
 Vertical Datum:
 Soundings are shown in feet and indicate depths below Mean Low Gulf Datum (MLG). Datum Relationships for Lower Atchafalaya River at Morgan City (03780) as of May 2014: 0.0' NAVD83 (2009.55) = 2.05' MLG.
 The location of navigation aids are based on and provided by the U.S. Coast Guard.
 2010 Aerial Photography data source: NAIP, 1998 DOQQ imagery shown in green from USGS.
 Reference is N.O.A.A. Navigation Chart No. 11355.
 ** Shoalest Sounding per Quarter per Reach.
 *** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
67 of 191
 Revision Number:
 3.13-20160811