

TABLE OF COORDINATES  
APPROX LIMITS OF WORK


POINT	X	Y
1	3714427.467	519304.773
2	3714558.995	519154.106
3	3712826.325	517641.540
4	3712592.796	517604.933
5	3712369.196	517409.737
6 P.O.B.	3712320.530	517465.483
7 P.O.E.	3714451.800	519276.900
8	3712344.863	517437.610

GAGE DESCRIPTION	VERTICAL DATUM	CONVERSION TO MLG
MISS. RIVER @ ALGIERS LOCK DCP # 01380	NAVD88 (2004.65)	ADD 1.42'




**DISCLAIMER**  
The information depicted on this map represents the results of a survey conducted by the U.S. Army Corps of Engineers. The user is responsible for the accuracy, reliability, usability, or suitability for any particular purpose of the information. The user is responsible for the accuracy, reliability, usability, or suitability for any particular purpose of the information. The user is responsible for the accuracy, reliability, usability, or suitability for any particular purpose of the information.

Submitted:	Reviewed:	Checked By:
	Chief Survey Section	AC
U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		

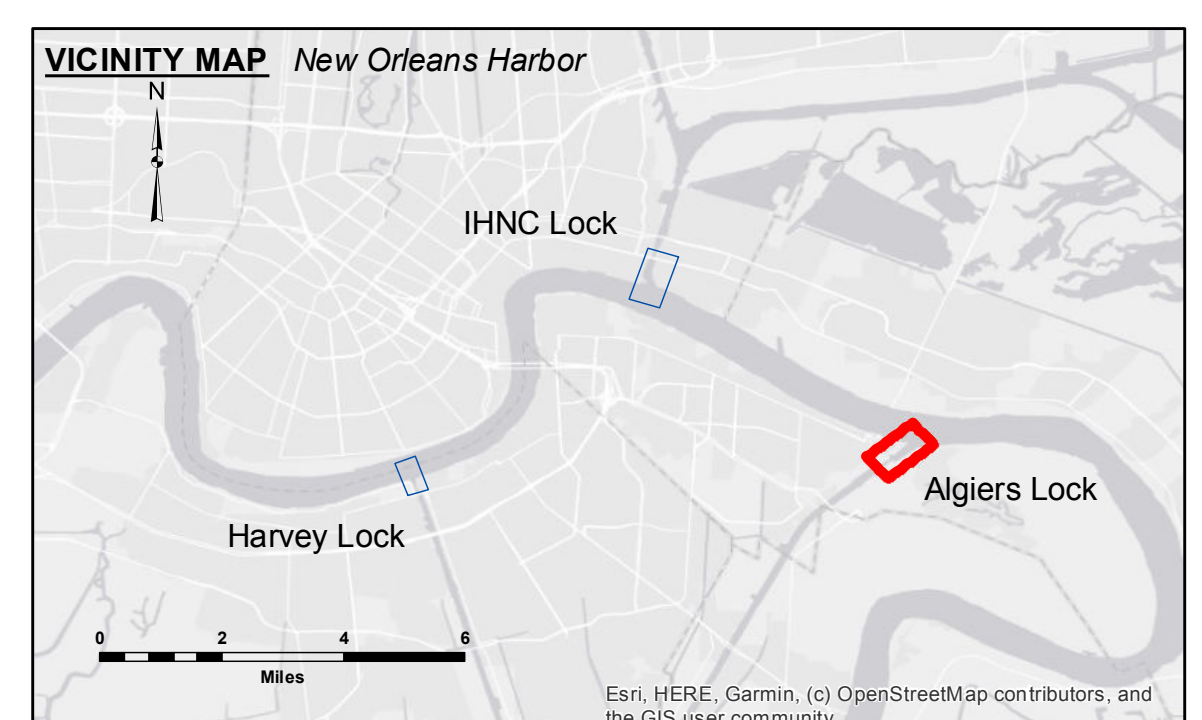


**LEGEND**

--- Federal Navigation Channel	○ Cable Area	□ Placement Area
— Federal Navigation Center Line	■ Placement Area	● Shoalest Sounding**
— As-built Pipeline/Cable	□ Anchorage Area	☆ Beacon, General
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy



LWRP: N/A  
Gage Reading: ALGIERS LOCK FB: 4.12 MLG  
Sea Conditions: CHOPPY  
Vessel Name: OB-169  
Survey Type: CONDITION  
Sounding Frequency\*\*\*: 400KHZ

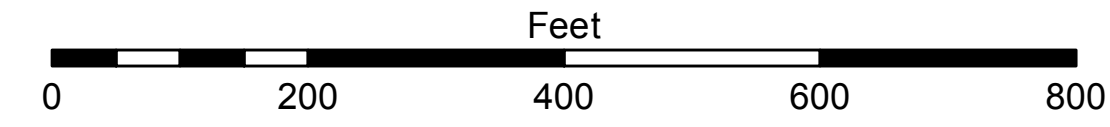

**NOTES:**  
Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
Vertical Datum:  
Soundings are shown in feet and indicate depths below Mean Low Gulf (MLG).  
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.  
The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE crew.  
2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.  
Reference is N.O.A. Navigation Chart No. 11370.  
\*\* Shoalest Sounding per Quarter per Reach.  
\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymeter settings.

**MISSISSIPPI RIVER DEEP-DRAFT LOCKS  
ALGIERS LOCK FOREBAY  
LK\_01\_ALG\_20211013\_CS\_5X5  
13 October 2021**

**Sheet Reference Number  
1 of 4**

Revision Number:  
4.2-20210420