


**Access Constraints:** The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the data are not to be used for any purpose other than that for which they were provided, and that the user is responsible for the accuracy, completeness, reliability, usability or suitability, for any particular purpose of the data. The user is responsible for the accuracy, completeness, reliability, usability or suitability, for any particular purpose of the data. The user is responsible for the accuracy, completeness, reliability, usability or suitability, for any particular purpose of the data. The user is responsible for the accuracy, completeness, reliability, usability or suitability, for any particular purpose of the data.

Submitted:	Room/Desk:	Approved:
Surveyed By: D/S/JDH	Checked By: AC	Checked By: AC
U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT		

**MISSISSIPPI RIVER - B.R. TO GULF  
BATON ROUGE FRONT CROSSING  
MD\_01\_BRF\_20201005\_CS**  
05 October 2020

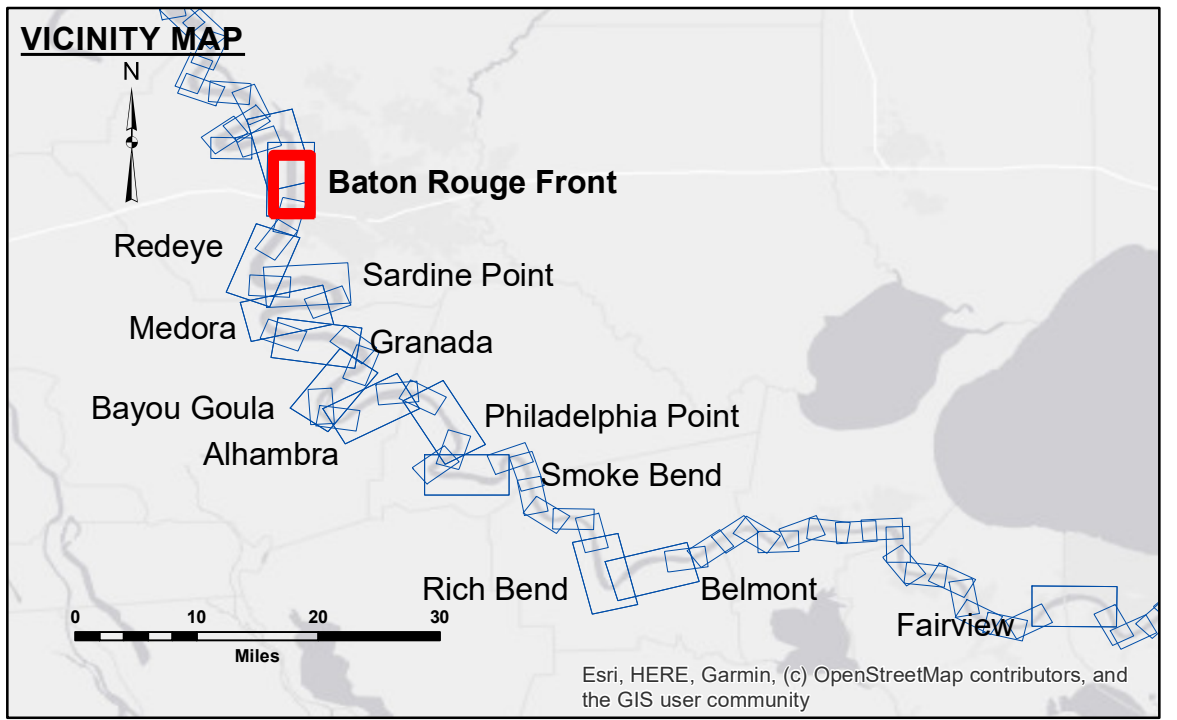

**LEGEND**

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ 0' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ 0' to -5'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -5' to -10'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -10' to -20'
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy	■ -20' to -30'
			■ -30' to -35'
			■ -35' to -40'
			■ -40' to -45'
			■ -45' and below

**NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A. Navigation Chart No. 11370.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

LWRP: 2.6  
Gage Reading: BR:11.4D:6.6 USED:11.5 NGVD  
Sea Conditions: SMOOTH  
Vessel Name: OB189  
Survey Type: CS  
Sounding Frequency\*\*\*: HIGH

**Sheet Reference Number**  
1 of 97

Revision Number:  
4.1-2019115