

US Army Corps of Engineers  
District: CEMVN

**DISTRIBUTION LIABILITY:** The data represents the results of data collection for a specific project. The user is responsible for the accuracy and use of the data. The user is responsible for the accuracy and use of the data. The user is responsible for the accuracy and use of the data.


**DATE:** 2 June 2003 W.S. 346  
3 June 2003 W.S. 346  
2 June 2003 W.S. 346

Submitted:	Reviewed By:	DS/PS
Recommended:	Plotted By:	BD
Approved:	Checked By:	AC

U.S. ARMY CORPS OF ENGINEERS  
NEW ORLEANS DISTRICT

**MISSISSIPPI RIVER - B.R. TO GULF**  
**ARLINGTON - SHEET 1**  
**MD\_02\_AR1X\_20210817\_CS**  
17 August 2021

**Sheet Reference Number**  
2 of 97

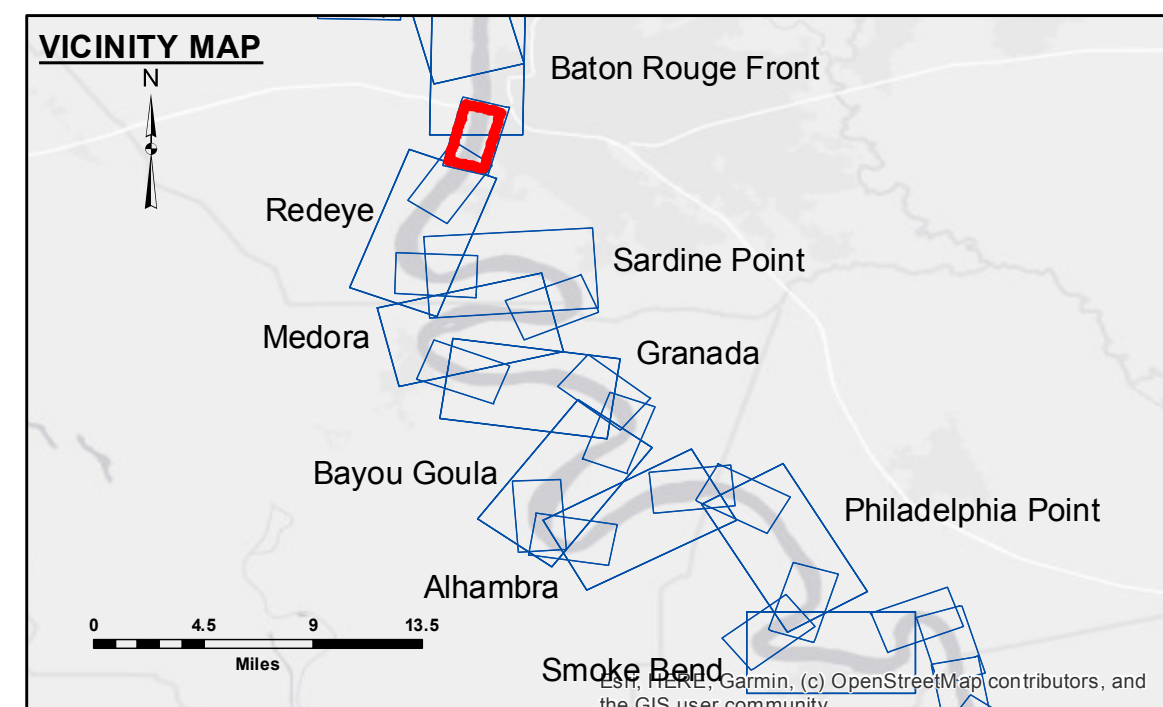

**LEGEND**

--- Federal Navigation Channel	● Cable Area	■ Shoaling Area	0' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	0' to -5'
— As-built Pipeline/Cable	⊗ Anchorage Area	☆ Beacon, General	-5' to -10'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	-10' to -20'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	-20' to -30'
			-30' to -35'
			-35' to -40'
			-40' to 45'
			-45' and below

**NOTES:**  
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD). Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE crew. 2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office. Reference is N.O.A.A. Navigation Chart No. 11370. \*\* Shoalest Sounding per Quarter per Reach.

LWRP:	2.5
Gage Reading:	BR:10.3 D:6.1 USED:10.2 NAVD
Sea Conditions:	CALM
Vessel Name:	M/V LAFORUCHE
Survey Type:	CS
Sounding Frequency***:	HIGH

Feet  
0 500 1,000 1,500 2,000 2,500

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and bathymeter settings.