



LEGEND			
--- Federal Navigation Channel	○ Cable Area	■ Shoaling Area	0' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	0' to -5'
— As-built Pipeline/Cable	□ Anchorage Area	☆ Beacon, General	-5' to -10'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	★ Red Navigation Buoy	-10' to -20'
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	-20' to -30'
			-30' to -35'
			-35' to -40'
			-40' to -45'
			-45' and below

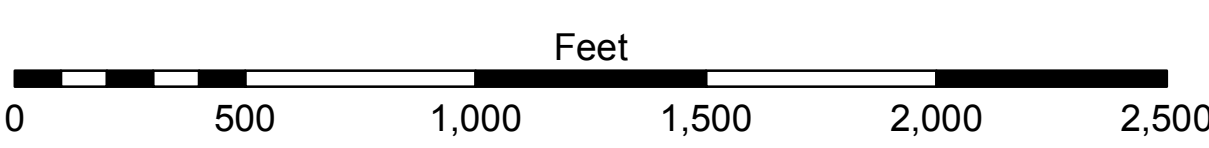

LWRP: 2.7  
 Gage Reading: BR:21.7 D:13.32 USED:21.30 NGVD  
 Sea Conditions: CALM  
 Vessel Name: OB-189  
 Survey Type: condition  
 Sounding Frequency\*\*\*: HIGH

**NOTES:**  
 Horizontal Coordinate System:  
 North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.  
 Vertical Datum:  
 Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).  
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.  
 The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.  
 2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.  
 Reference is N.O.A.A. Navigation Chart No. 11370.  
 \*\*\* Shoalest Sounding per Quarter per Reach.  
 \*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

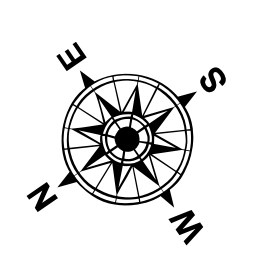

**DISCLAIMER:**  
 Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers project. It is not intended for use in any other project, and its use is limited to the project for which it was collected. The user is responsible for the results of any use of the data for purposes other than those intended. The application of the data for other than its intended purpose is at the user's risk.  
 Data Constants: Hydrographic survey data is subject to change due to several factors including but not limited to changing bathymetry, sedimentation, and channel conditions. The US Army Corps of Engineers does not accept responsibility for changes in the hydrographic conditions when developed after the date of the survey. Product maintainers should not rely solely upon this internal use. Product maintainers should not rely solely upon this internal use.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted:	Surveyed By: S.J.R.J.H.
Recommended:	Plotted By: B.D.
Approved:	Checked By: A.C.

**MISSISSIPPI RIVER - B.R. TO GULF  
 ARLINGTON - SHEET 2  
 MD\_03\_AR2\_20170123  
 23 January 2017**

**Sheet Reference Number  
 3 of 97**