



DISCLAIMER
Accuracy: The United States Government furnishes these data and the recipient accepts them with the express understanding that the U.S. Government makes no warranty, expressed or implied, concerning the accuracy, reliability, or usefulness of the data furnished. The United States Government shall not be liable for damages resulting from use of these data under any circumstances. Any person using these data is responsible for any errors that may appear under their use. The United States Government is not liable for damages resulting from use of these data under any circumstances. Any person using these data is responsible for any errors that may appear under their use. The United States Government is not liable for damages resulting from use of these data under any circumstances. Any person using these data is responsible for any errors that may appear under their use.

U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS DISTRICT	
Submitted:	Surveyed by: RYLAND SIMMONS
Recommended:	Printed By: BD
Chief, Survey Section	Checked By: AO
Approved:	Chief, Waterways Maintenance Section

**MISSISSIPPI RIVER - B.R. TO GULF
REDEYE CROSSING
MD_04_RED_20220524_CS
24 May 2022**

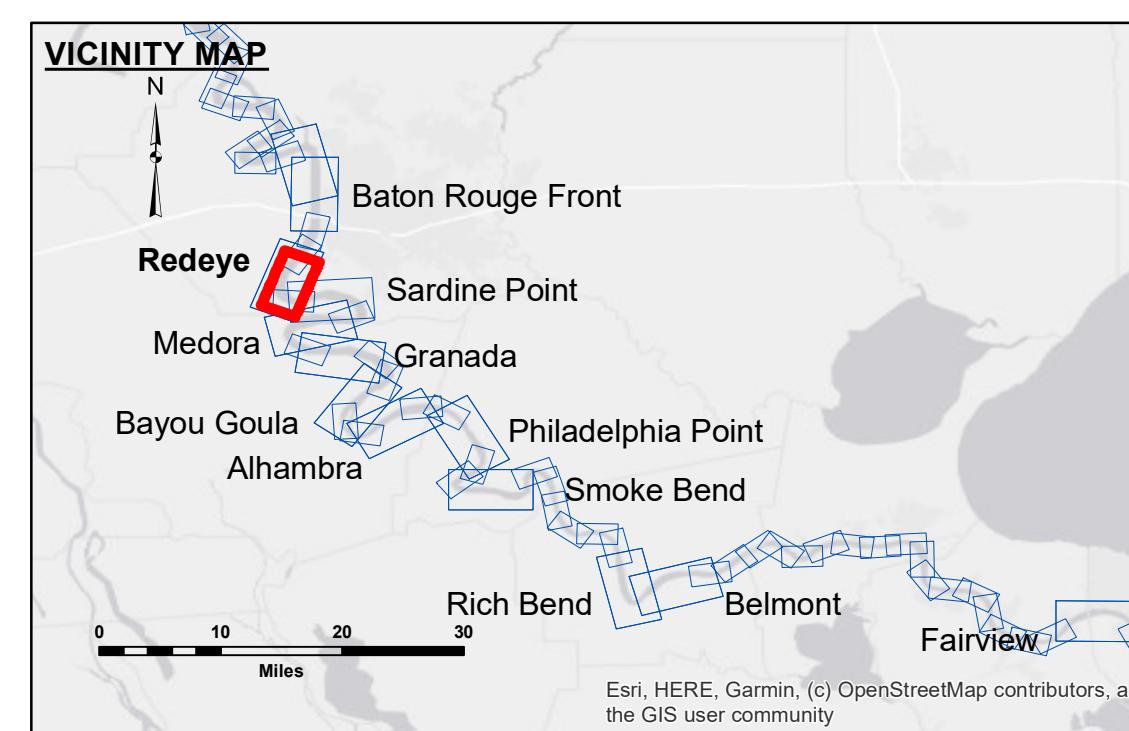

LEGEND	
— Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	■ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	◎ Obstruction Point
— Project Depth Contour	★ Beacon, General
	◆ Red Navigation Buoy
	◆ Green Navigation Buoy
	LWRP: 2.4
	Gage Reading: BR:32.1 D:21.7 USED:31.2 NAVD
	Sea Conditions: CALM
	Vessel Name: OB-189
	Survey Type: CONDITION
	Sounding Frequency***: HIGH
	NOTES:
	Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
	Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).
	Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
	The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
	2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
	Reference is N.O.A.A. Navigation Chart No. 11370.
	** Shoalest Sounding per Quarter per Reach.
	*** High frequency (20 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

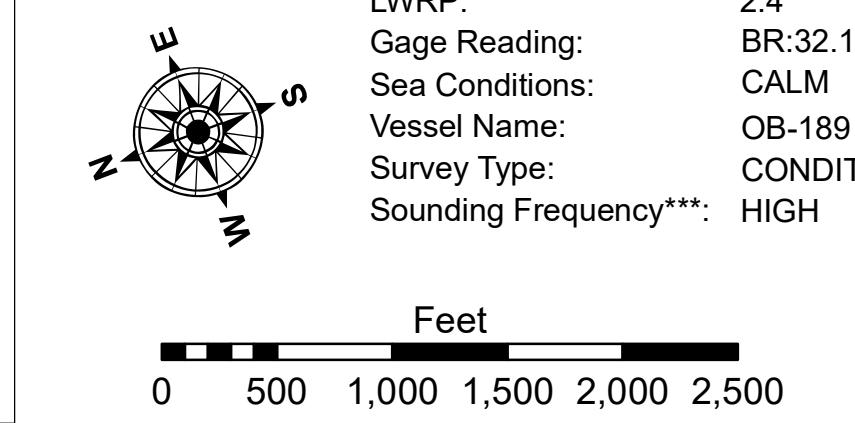

**Sheet
Reference
Number**
4 of 97

Revision Number:
4-20200420