




US Army Corps  
of Engineers  
District: CEMVN

Distribution liability: The data represents the results of data collection/processing by a specific US Army Corps of Engineers activity and indicates the general existing conditions. As such, the United States Government makes no warranties, expressed or implied, regarding the accuracy, reliability, or completeness of the data furnished. The user is responsible for the results of any use of the data furnished. The United States shall not be liable for damages resulting from use of the data furnished.

Data Conditions: Hydrographic survey data including but not limited to dredging reports due to several factors including but not limited to dredging activity and changes in riverbed elevation and scouring processes due to the U.S. Army Corps of Engineers. The data is intended for U.S. Army Corps of Engineers internal use. Private users should not rely upon it.

U.S. ARMY CORPS OF ENGINEERS DISTRICT	
Survived By:	DSIA
Submitted:	BD
Recommended:	Chief, Survey Section
Approved:	Chief, Waterways Maintenance Section

MISSISSIPPI RIVER - B.R. TO GULF  
GRANADA CROSSING  
MD\_10\_GRA\_20210414\_CS  
14 April 2021

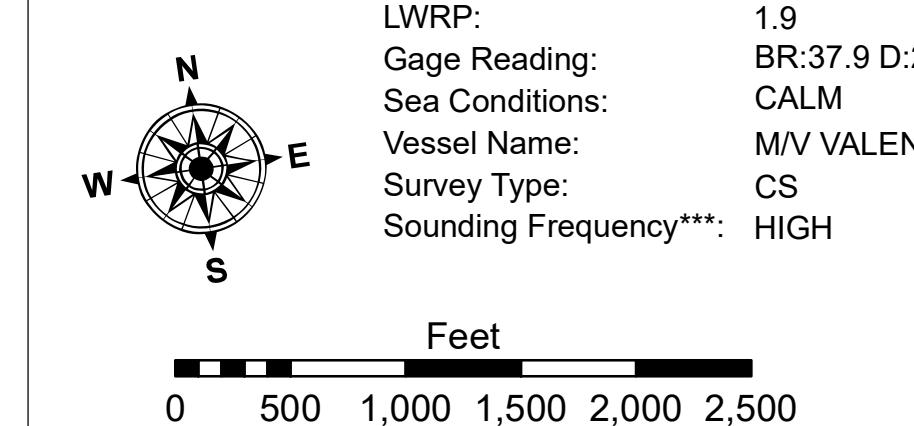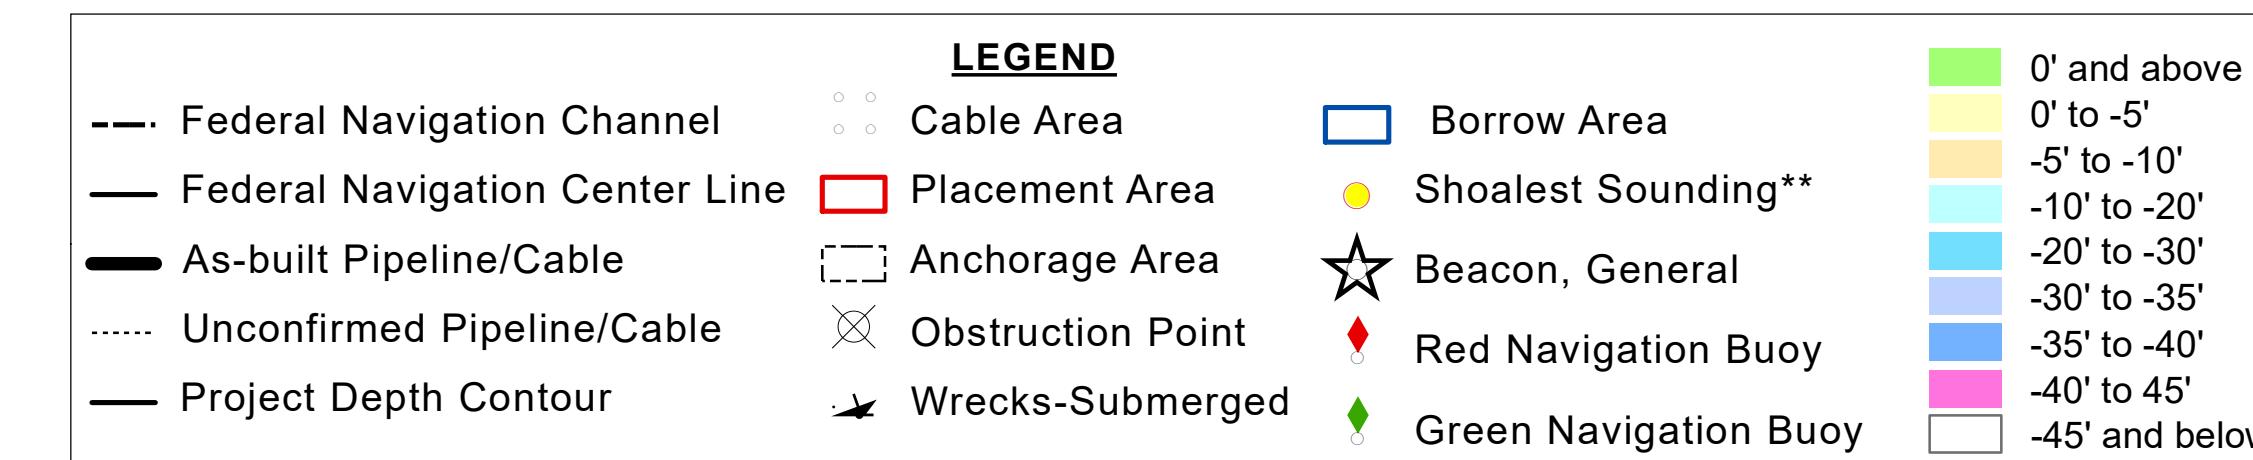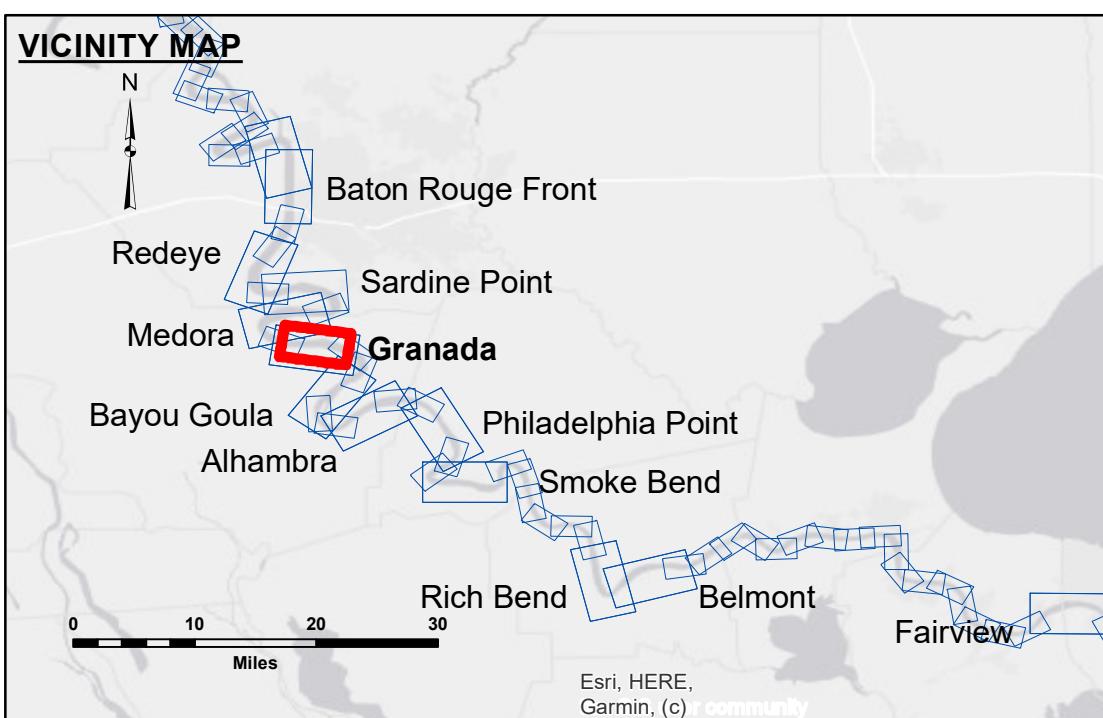

## NOTES:

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).  
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.  
2015 Aerial Photography data source: NAIP, USDA-FSA-AFPO Aerial Photography Field Office.  
Reference is N.O.A.A. Navigation Chart No. 11370.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet  
Reference  
Number

10 of 97

Revision Number:  
4-1-20191105