


US Army Corps
of Engineers
District: CEMVN


DISCLAIMER
Access Conditions: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the U.S. Government makes no warranties, expressed or implied, regarding the quality or reliability of the data furnished. The recipient agrees to indemnify and hold harmless the United States from all claims arising from the use of the data furnished. The United States shall be under no liability whatsoever to any person who may receive or use this data. Any person who receives or uses this data agrees to indemnify and hold harmless the United States from all claims arising from the use of the data furnished. The recipient may not transfer the data to anyone else without the prior written consent of the U.S. Government.

U.S. ARMY CORPS OF ENGINEERS
NEW ORLEANS DISTRICT
Surveyed By: RYAN SIMMONS
Printed By: BD
Checked By: AOH
Approved: Chief, Waterways Maintenance Section
Sheet 11

MISSISSIPPI RIVER - B.R. TO GULF
GRANADA CROSSING
MD_10_GRA_20241007_CS
07 October 2024

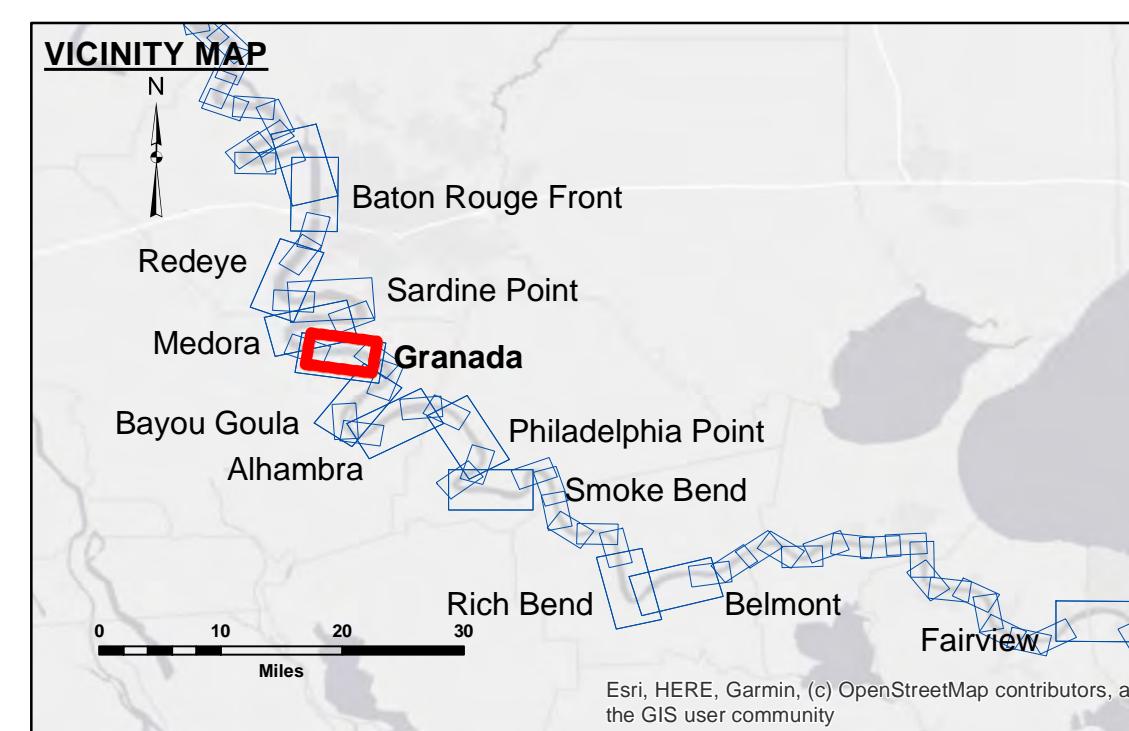

LEGEND	
— Federal Navigation Channel	○ Cable Area
— Federal Navigation Center Line	■ Placement Area
— As-built Pipeline/Cable	□ Anchorage Area
..... Unconfirmed Pipeline/Cable	★ Beacon, General
— Project Depth Contour	⊗ Obstruction Point
	◆ Red Navigation Buoy
	◆ Wrecks-Submerged
	◆ Green Navigation Buoy

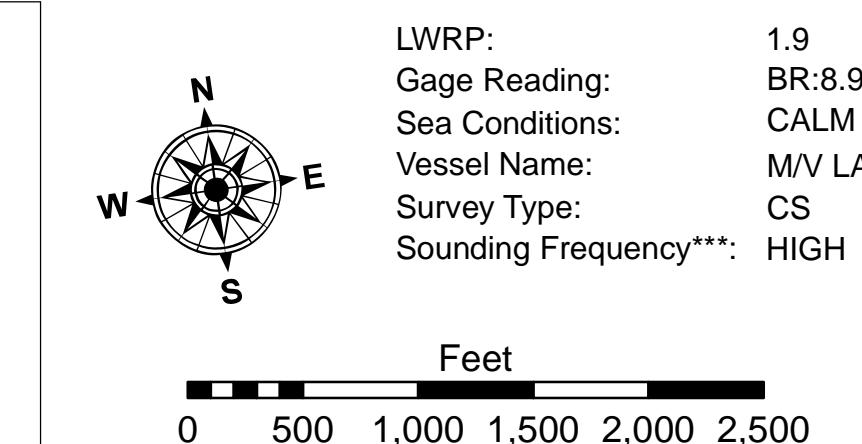

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

2015 Aerial Photography data source: NAIP, USDA-FSA-APOF Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

** Shoal sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet
Reference
Number**

10 of 97

Revision Number:
4.2-20200420