
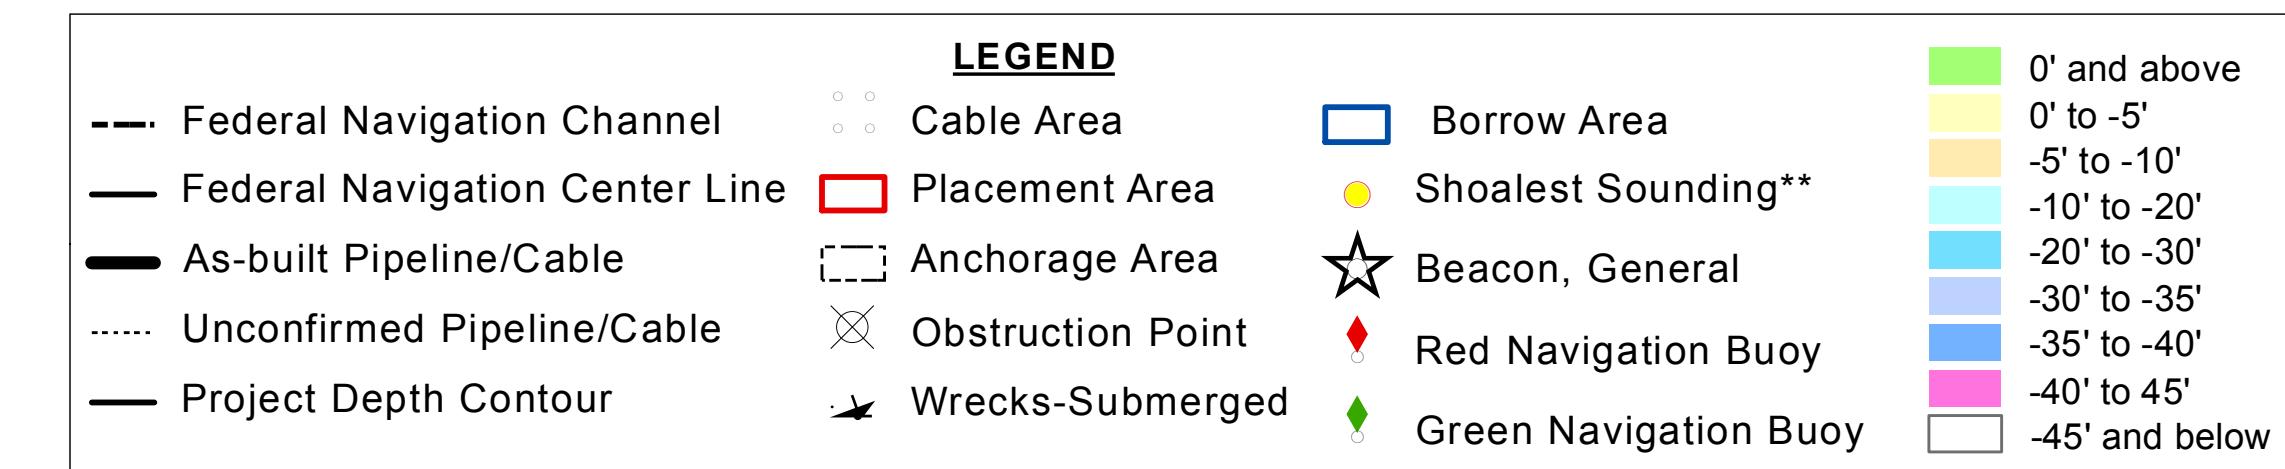


DATA STATEMENT: The data represents the results of data collection processing by a specific US Army Corps of Engineers active and inoperative surveying conditions. Such specifications are not intended to be used for engineering applications. The user is responsible for the results of any application of the data for other than its intended purpose.
Data Content: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging activity and natural flooding and scour processes. The U.S. Army Corps of Engineers does not guarantee the accuracy or reliability of the data provided. The data is intended for U.S. Army Corps of Engineers internal use. Please contact the U.S. Army Corps of Engineers for further information. The data is intended for use in hydrographic conditions which develop after the date of publication. The data is not intended for use in international waters. Please contact the U.S. Army Corps of Engineers for further information.

U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS DISTRICT	
Surveyed By:	RYLAND SONNEN
Submitted:	
Project By:	BD
Checked By:	AC

MISSISSIPPI RIVER - B.R. TO GULF
ALHAMBRA CROSSING
MD_16_ALH_20210504_CS
04 May 2021

Sheet Reference Number
16 of 97

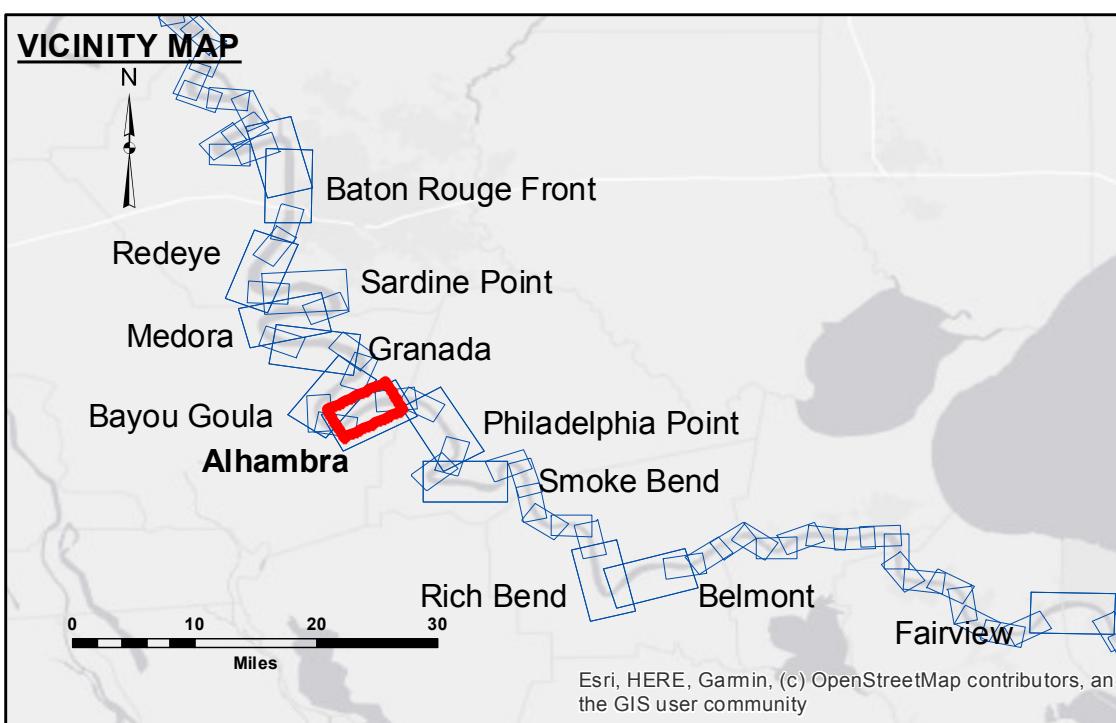

NOTES:

Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).

Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (20 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

LWRP: 1.7
Gage Reading: BR:28.6 D:19.0 USED:21.70 NAVD
Sea Conditions: CALM
Vessel Name: OB-189
Survey Type: CS
Sounding Frequency***: HIGH

