



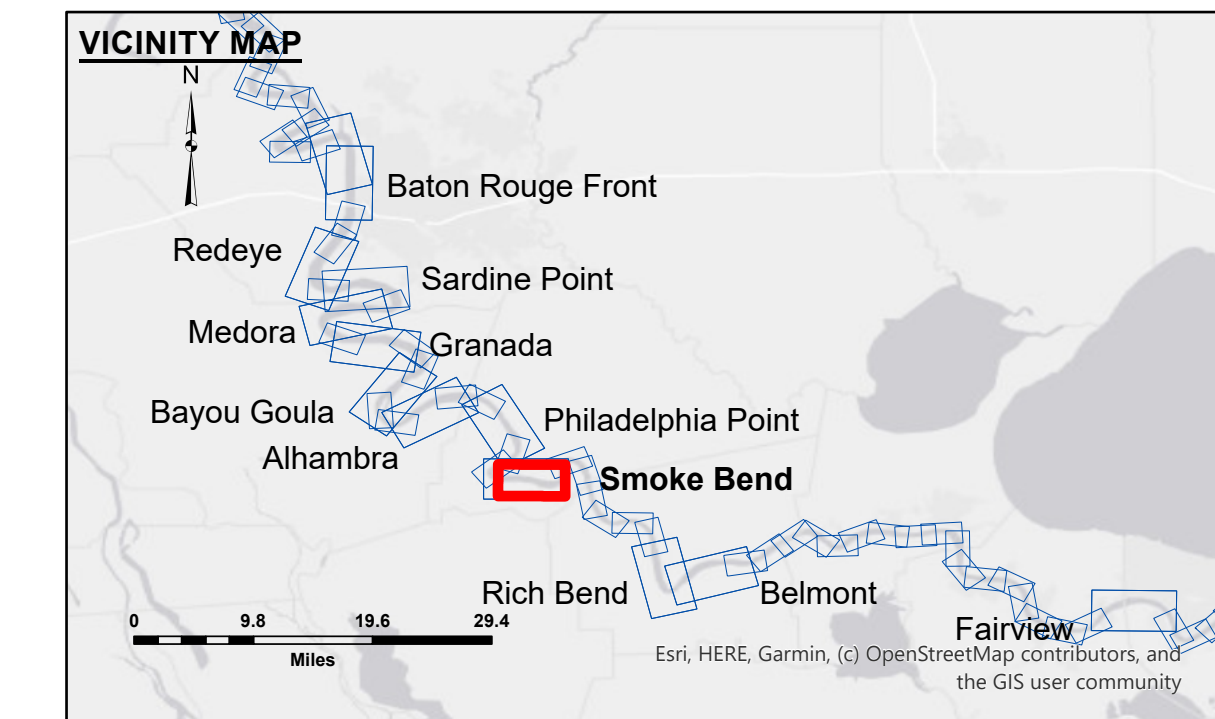

LEGEND		
--- Federal Navigation Channel	⋯ Cable Area	▭ Borrow Area
— Federal Navigation Center Line	▭ Placement Area	● Shoalest Sounding**
— As-built Pipeline/Cable	▭ Anchorage Area	★ Beacon, General
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy
— Project Depth Contour	✈ Wrecks-Submerged	◆ Green Navigation Buoy
		0' and above
		0' to -5'
		-5' to -10'
		-10' to -20'
		-20' to -30'
		-30' to -35'
		-35' to -40'
		-40' to 45'
		-45' to 50'
		-50' and below

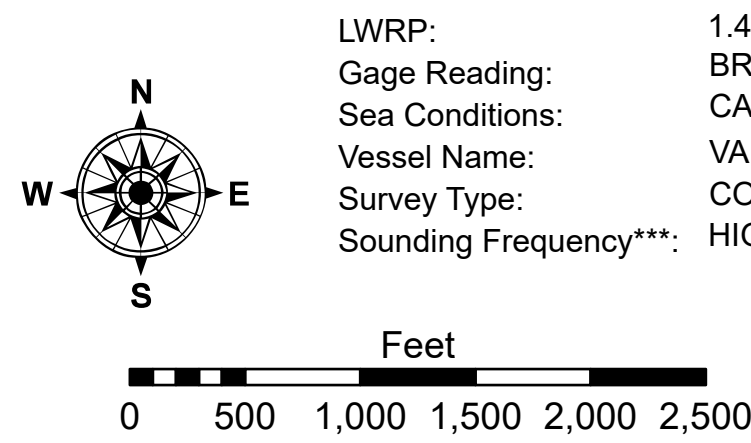

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).

Distances on the Mississippi River, above and below Head of Passes are shown
at 1 mile intervals.

The location of navigation aids are based on and provided by the U.S. Coast Guard and USACE

2021 Aerial Photography data source: NAIP, USDA-FSA-AFPO Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

**** Shoaltest Sounding per Quarter per Reach.**

***** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff," if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom materials. Low frequency accuracies may vary depending on channel conditions and bathymeter settings.**

Revision Number:
5.25.08.04-5.25.08.04