


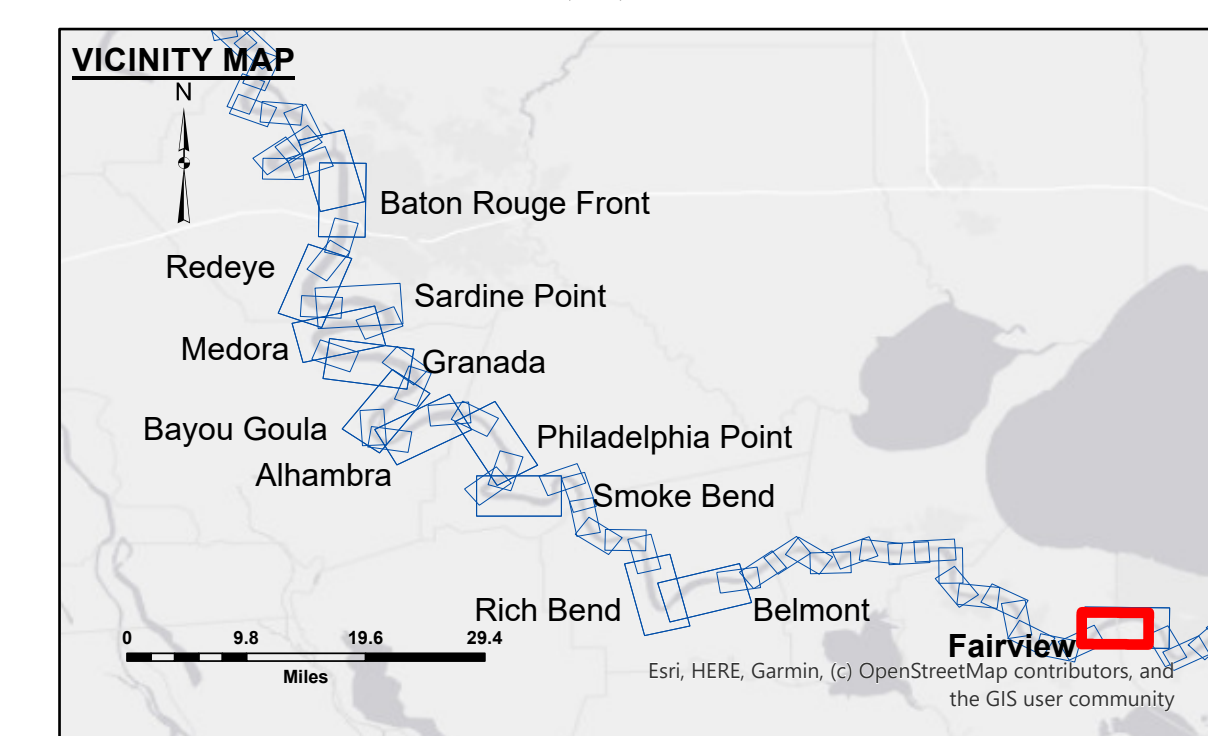

Distribution Liability. The data represents the results of data collection and analysis and does not constitute a warranty of accuracy and reliability and indicates the general existing conditions. As such, the data is to be used as a guide only and is not intended to be used as a final or sole basis for any design, construction, or other engineering specifications. The user is responsible for the results of any of the application of the data for other than its intended purpose.

DISCLAIMER: The United States Government furnishes these data and the recipient accepts and uses them with the express understanding that the US Government makes no warranties, expressed, or implied concerning the accuracy, completeness, readability, suitability or suitability for any particular purpose of the information and the data furnished. The United States shall be held harmless for any damages, claims, or losses, including those made thereof. These data belong to the Government. Therefore the recipient fully agrees not to represent these data to anyone as other than Government provided data. The recipient may not transfer these data to others without also transferring this Disclaimer.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Submitted _____	Surveyed By: LT, PM
Recommended _____	Plotted By: BD
Approved: _____	Checked By: AOJH
Chief, Waterways Maintenance Section	

MISSISSIPPI RIVER - B.R. TO GULF
FAIRVIEW CROSSING
MD_48_FRVX_20250401_CS
01 April 2025

Sheet
Reference
Number
48 of 91

Revision Number:
5.25.04.03-5.25.04.03

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD83).

Distances on the Mississippi River, above and below Head of Passes are shown
at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE.

2021 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

**** Shoalest Sounding per Quarter per Reach.**

******* High frequency (200 kHz) survey data represents the first signal return at a sounding
location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz)
survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom
material. Low frequency accuracies may vary depending on channel conditions and bathymetric
settings.