


Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions as such. The data is provided "as is" without warranty or guarantee of its accuracy, reliability, or completeness. The user assumes the risk of using the data. The user is responsible for the results of any application of the data for other than its intended purpose.

Data Constraints: Hydrographic survey data is subject to change rapidly due to natural events including but not limited to dredging activities and natural shoals and scouring processes. The U.S. Army Corps of Engineers does not warrant the data for use in hydrographic conditions which develop after the date of publication. This data is intended for U.S. Army Corps of Engineers internal use and shall not be sold to third parties.


U.S. ARMY CORPS OF ENGINEERS	
NEW ORLEANS District	
Surveyed By:	DSR
Protected By:	BD
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section
Checked By:	
AO	

MISSISSIPPI RIVER - B.R. TO GULF
BATON ROUGE FRONT RECON
MR_01_BRF_20170418_CS
18 April 2017

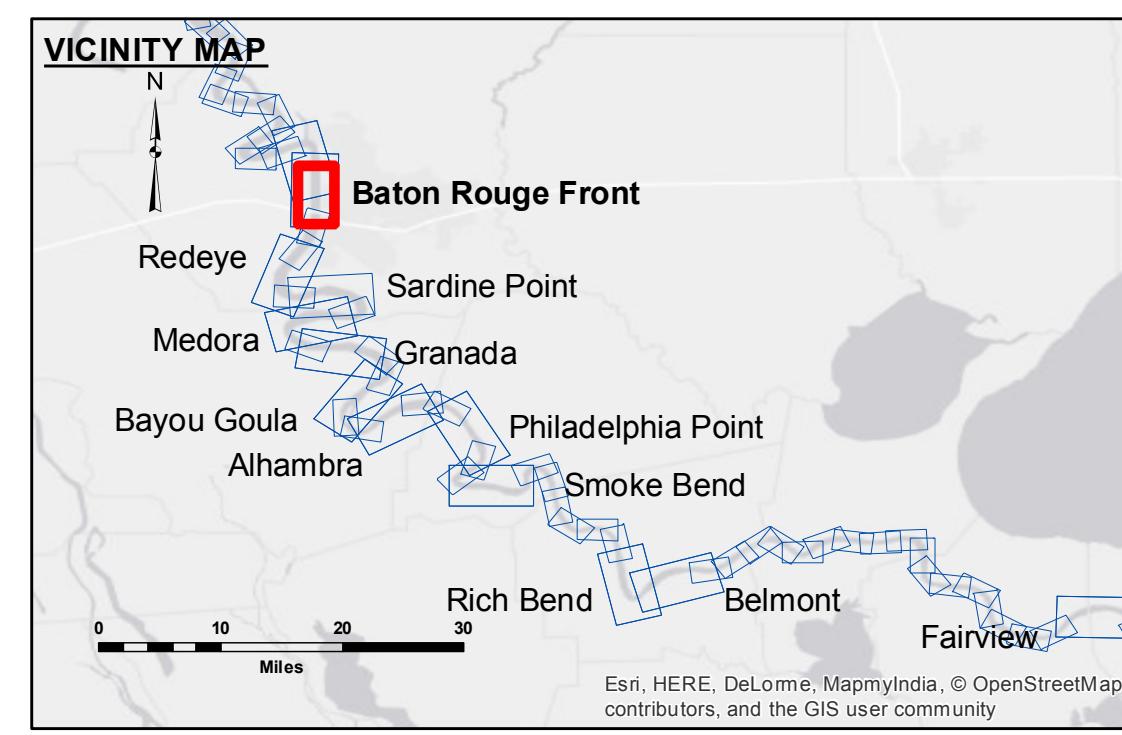

- LEGEND**
- Federal Navigation Channel
 - Federal Navigation Center Line
 - As-built Pipeline/Cable
 - Unconfirmed Pipeline/Cable
 - Project Depth Contour
 - Cable Area
 - Placement Area
 - Anchorage Area
 - Obstruction Point
 - Wrecks-Submerged
 - Borrow Area
 - Shoalest Sounding**
 - ★ Beacon, General
 - ◆ Red Navigation Buoy
 - ◆ Green Navigation Buoy

LWRP:	2.8
Gage Reading:	BR:30.1 D:20.1 USED:30.4 NGVD
Sea Conditions:	CALM
Vessel Name:	MV TECHE
Survey Type:	CONDITION
Sounding Frequency***:	HIGH

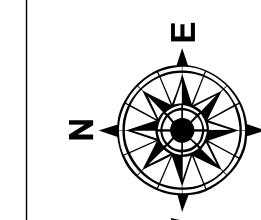

Feet
0 500 1,000 1,500 2,000 2,500

NOTES:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).
Distances on the Mississippi River, above and below Head of Passes are shown
at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
Reference is N.O.A.A. Navigation Chart No. 11370.

** Shoalest Sounding per Quarter per Reach.

*** High frequency (200 kHz) survey data represents the first signal return at a sounding
location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz)
survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom
material. Low frequency accuracies may vary depending on channel conditions and fathometer
settings.

Sheet
Reference
Number
1 of 97

Revision Number:
312-20160811