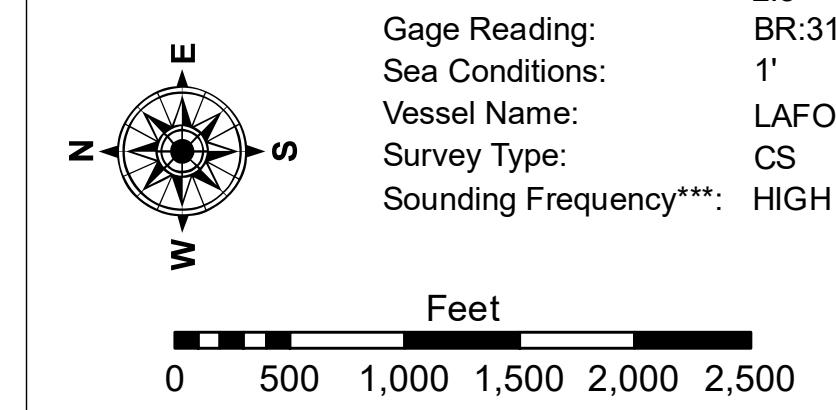
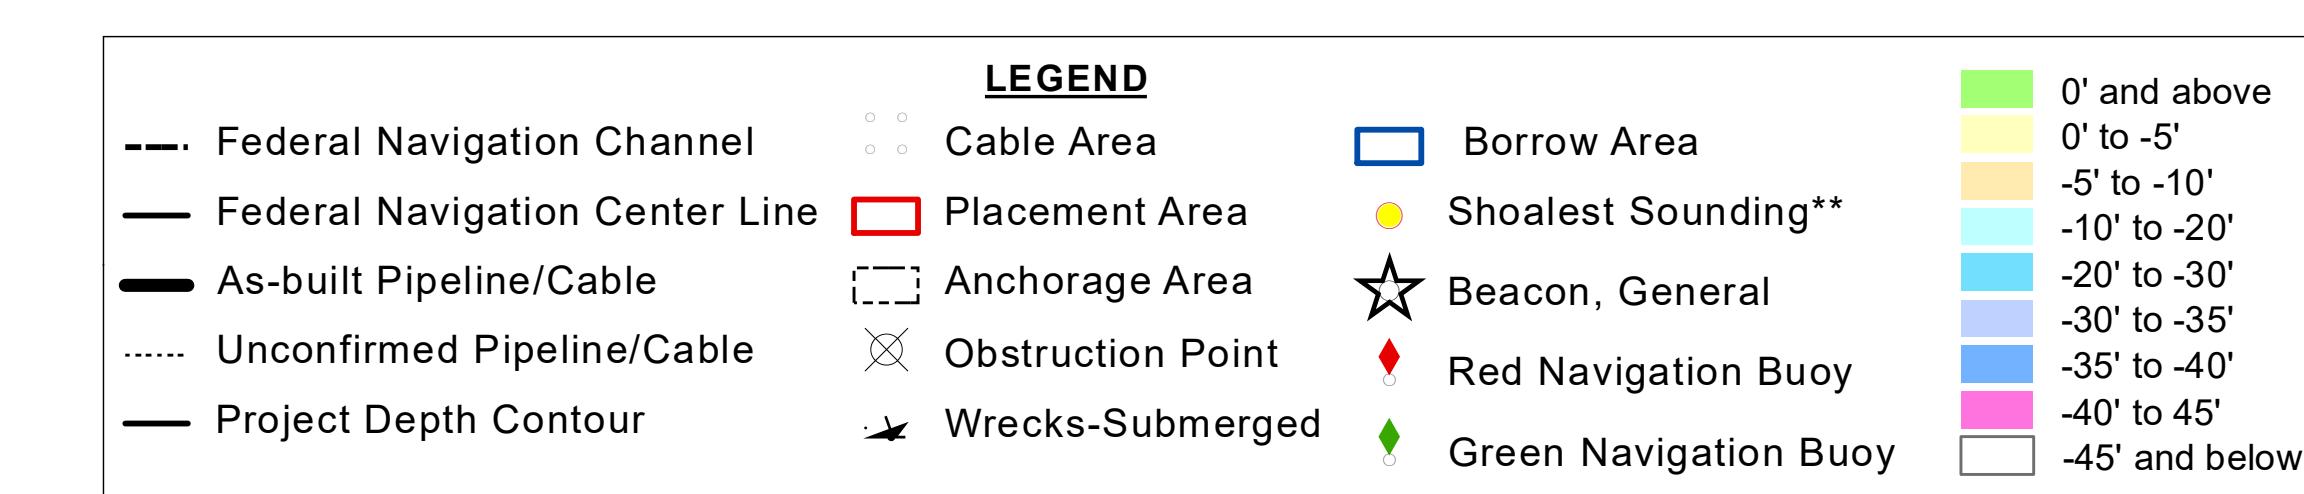
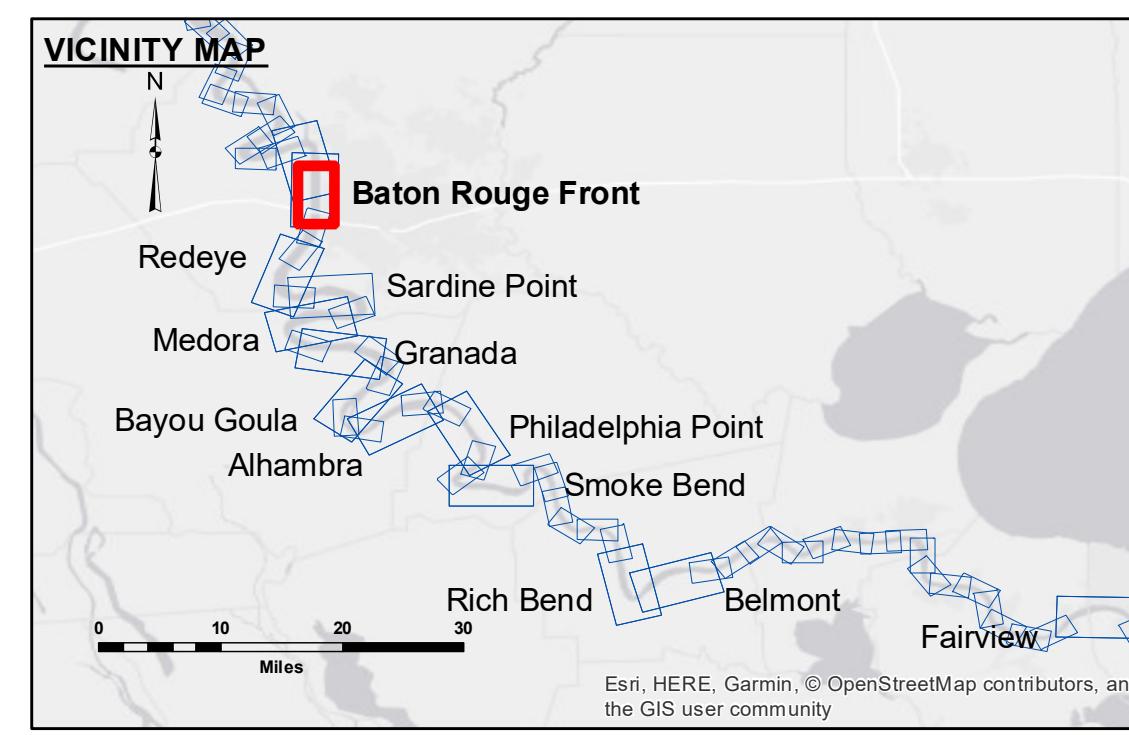


Distribution Liability: The data represents the results of data collection/processing for a specific US Army Corps of Engineers activity and indicates the general existing conditions, such as, but not limited to, boundaries, locations, and descriptions. The user is responsible for the results of any application of the data for other than its intended purpose.

Data Conditions: Hydrographic survey data is subject to change due to several factors including but not limited to dredging activities and natural shoaling and scouring processes or changes in the hydrographic conditions over time. This data is intended for U.S. Army Corps of Engineers use only. The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS Maintenance Section	
Surveyed By:	JHPS
Submitted:	
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section
Approved:	

**MISSISSIPPI RIVER - B.R. TO GULF**  
**BATON ROUGE FRONT RECON**  
**MR\_01\_BRF\_20181126\_CS**  
**26 November 2018**

**NOTES:**

Horizontal Coordinate System:  
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD). Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.

The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.  
2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.

Reference is N.O.A.A. Navigation Chart No. 11370.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet  
Reference  
Number**  
**1 of 97**

Revision Number:  
312-20160811