

DISTRIBUTION STATEMENT: The data represents the results of data collection/processing by a specific US Army Corps of Engineers activity and indicates the general accuracy of the results. Such data is provided "as is" without warranty of any kind, express or implied, including, but not limited to, warranties of merchantability, fitness for a particular purpose and non-infringement. The user is responsible for the results of any application of the data for other than its intended purpose.



DATA STATEMENT: Hydrographic survey data is subject to change due to several factors including but not limited to dredging activity and natural shoaling and coining processes. The U.S. Army Corps of Engineers does not warrant the data contained in this publication. This data is intended for U.S. Army Corps of Engineers hydrographic conditions which develop after the date of publication. The data is furnished without warranty of any kind.

The information depicted on this map represents the results of a survey conducted on the date indicated and can only be considered to represent the general condition existing at that time.

U.S. ARMY CORPS OF ENGINEERS NEW ORLEANS DISTRICT	
Surveyed By:	DSR
Submitted:	
Protected By:	BD
Recommended:	One Survey Section
Approved:	One Waterways Maintenance Section
Checked By:	AO

**MISSISSIPPI RIVER - B.R. TO GULF
SARDINE POINT RECON
MR_06_SDP_20170417_CS**

17 April 2017

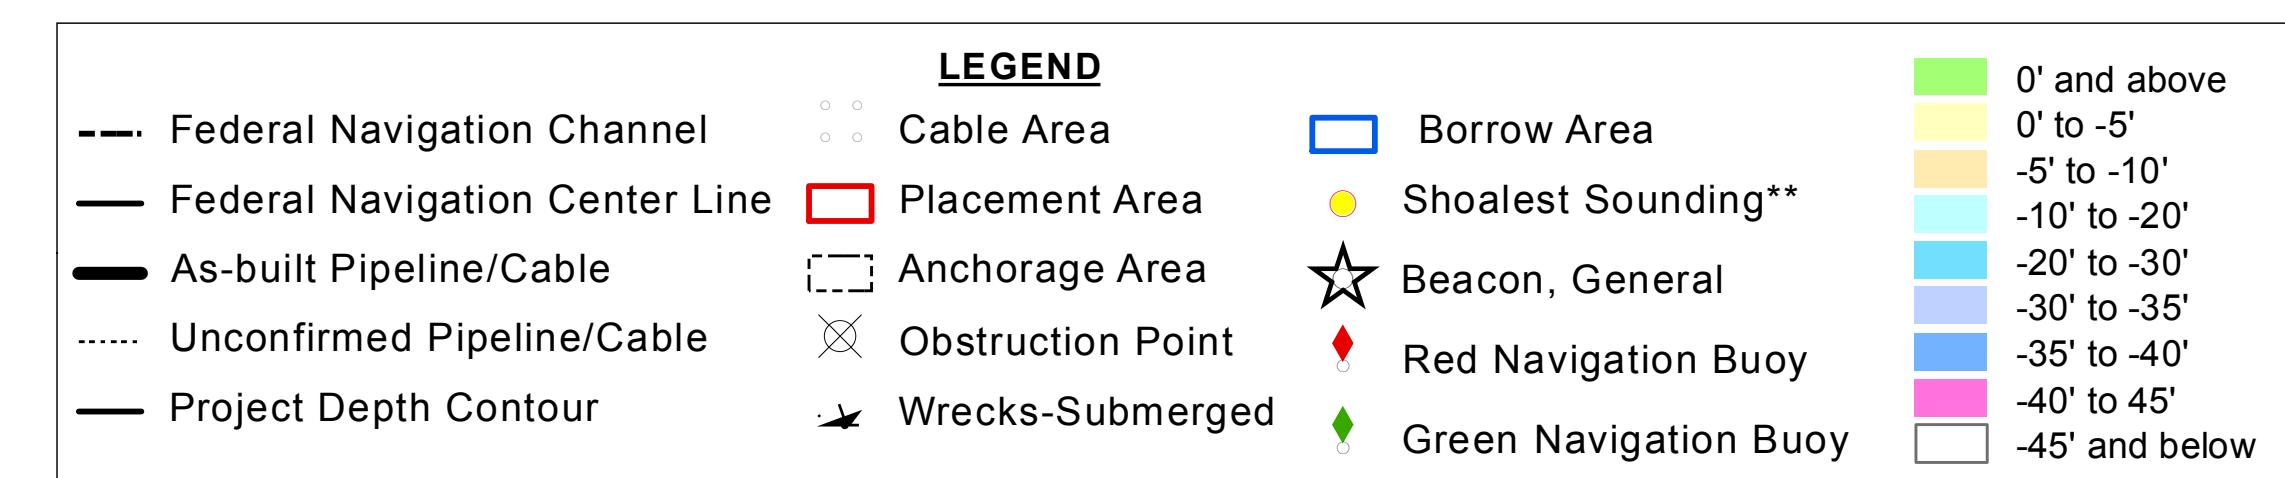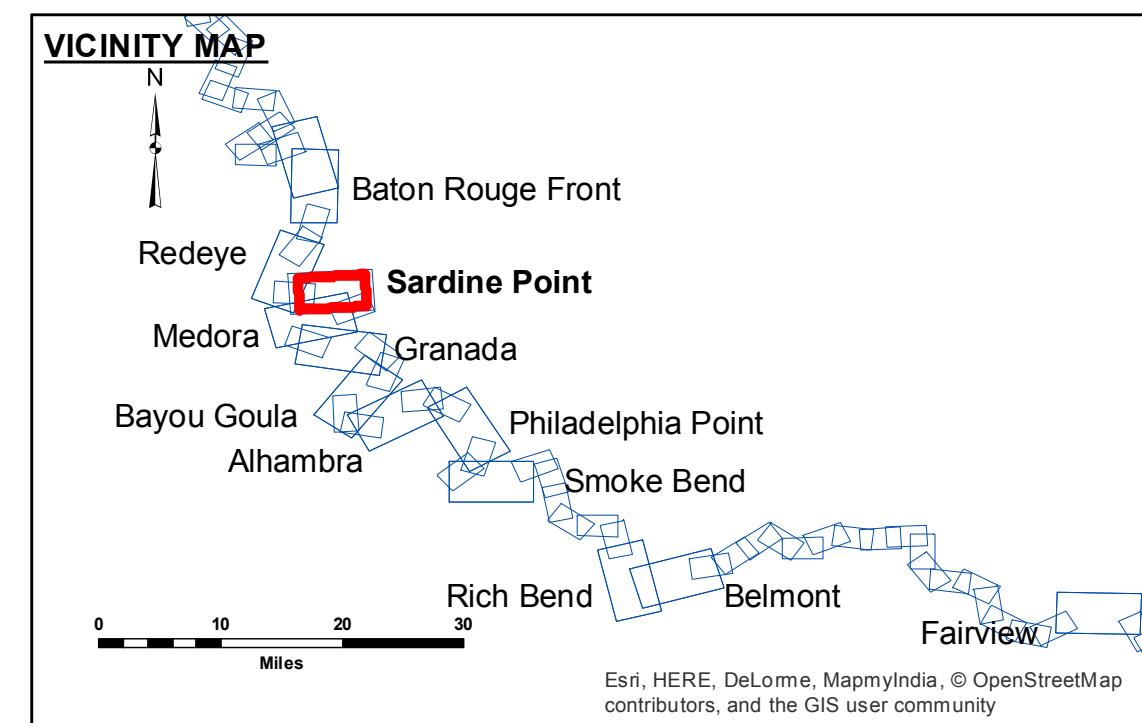

LWRP: 2.4
Gage Reading: BR:29.8 D:20.6 USED:28.2 NGVD
Sea Conditions: CALM
Vessel Name: MV TECHE
Survey Type: CONDITION
Sounding Frequency*:** HIGH

NOTES:
Horizontal Coordinate System: North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD). Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
Reference is N.O.A.A. Navigation Chart No. 11370.
** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

