

LEGB

- Federal Navigation Channel
 - Federal Navigation Center Line
 - As-built Pipeline/Cable
 - Unconfirmed Pipeline/Cable
 - Project Depth Contour
 - Cable Area
 - Placement Area
 - [] Anchorage Area
 - ⊗ Obstruction Point
 - ↗ Wrecks-Submerged
 - Borrow Area
 - (●) Shoalest Sounding
 - ★ Beacon, General
 - ◆ Red Navigation Buoy
 - ◆ Green Navigation Buoy

A vertical color scale bar with eight horizontal color bands and corresponding depth labels:

- 0' and above (Green)
- 0' to -5' (Yellow)
- 5' to -10' (Orange)
- 10' to -20' (Light Blue)
- 20' to -30' (Blue)
- 30' to -35' (Purple)
- 35' to -40' (Dark Blue)
- 40' to 45' (Pink)
- 45' and below (Grey)

TESTS:

Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane
Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.


ical Datum:
Readings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).
Distances on the Mississippi River, above and below Head of Passes are shown
with intervals.

location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.

Aerial Photography data source: NAIP, USDA-FSA-A

oallest Sounding per Quarter per Reach.

igh frequency (200 kHz) survey data represents the first signal return at a sounding
ion and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz)
ey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom
aterial. Low frequency accuracies may vary depending on channel conditions and fathometer
ngs.

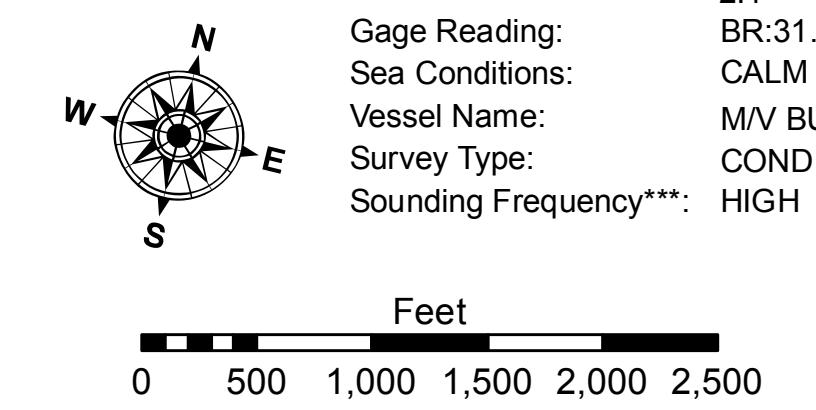

Sheet Reference Number

Revision Number:
3.8.0-20150202