





ACCESS NOTES
Distribution Liability: The data represents the results of data collection...

Table with 3 columns: Submitted, Recommended, Approved. Rows include Surveyed By (DR, JH), Plotted By (BD), and Checked By (AC).


MISSISSIPPI RIVER - B.R. TO GULF
RICH BEND RECON
MR_29_RIB_20170126
26 January 2017

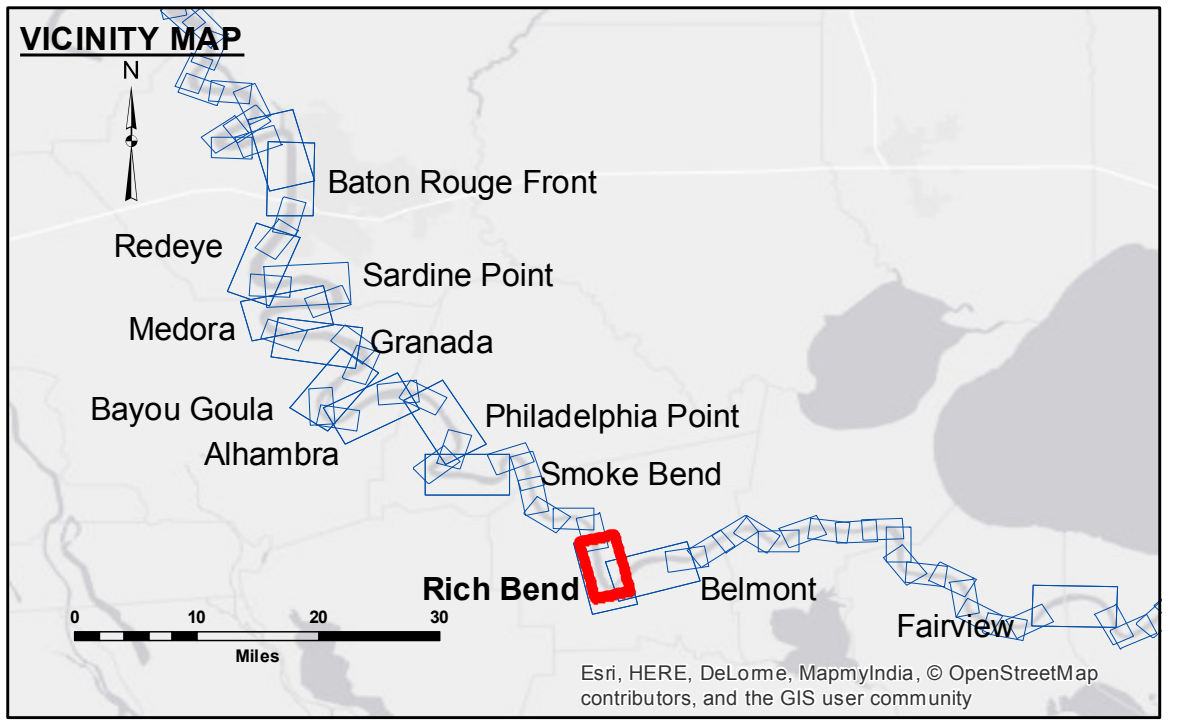

LEGEND: Federal Navigation Channel, Cable Area, Placement Area, Anchoage Area, Obstruction Point, Wrecks-Submerged, Borrow Area, Shoalest Sounding**, Beacon, General, Red Navigation Buoy, Green Navigation Buoy, Depth Contours.

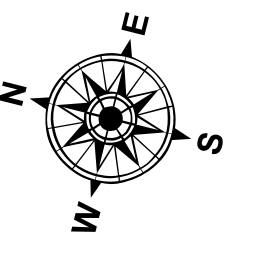

LWRP: 1.3
Gage Reading: D:15.45 R:11.0 USED:13.40 NGVD
Sea Conditions: CALM
Vessel Name: OB-189
Survey Type: CONDITION
Sounding Frequency***: HIGH

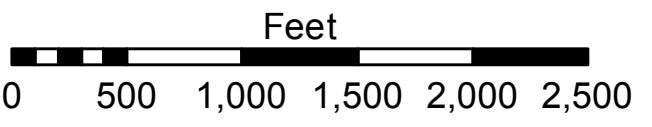

NOTES:
Horizontal Coordinate System:
North American Datum of 1983 (NAD83), projected to the State Plane Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.
Vertical Datum:
SOUNDINGS are shown in feet and indicate depths below Low Water Reference Plane 2007 (NGVD).
Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.
The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.
2010 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.
Reference is N.O.A. Navigation Chart No. 11370.
*** Shoalest Sounding per Quarter per Reach.
*** High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Sheet Reference Number
29 of 97

Revision Number:
3.8-0-20150202