


**Distribution Liability:** The data represents the results of data collection processing for a specific US Army Corps of Engineers project. It is only valid for its intended use, control, time and accuracy specifications. The user is responsible for the results. The user, in the application of the data for other than its intended purpose, assumes all liability for any errors or omissions. Data Contaminants: Hydrographic survey data is subject to change rapidly due to several factors including but not limited to dredging, shoaling, and other factors. The user should verify the data for the hydrographical conditions when developed after the date of the survey. The information depicted on this map represents the results of a survey conducted under the general condition existing at that time. Internal users should not rely solely upon it.

Submitted:	Surveyed By: RYLAND/HOSHMAN
Recommended:	Plotted By: BD
Approved:	Checked By: AC

**MISSISSIPPI RIVER - SHALLOW DRAFT**  
**FORT ADAMS REACH**  
**MS\_08\_FARX\_20191030\_CS**  
**30 October 2019**

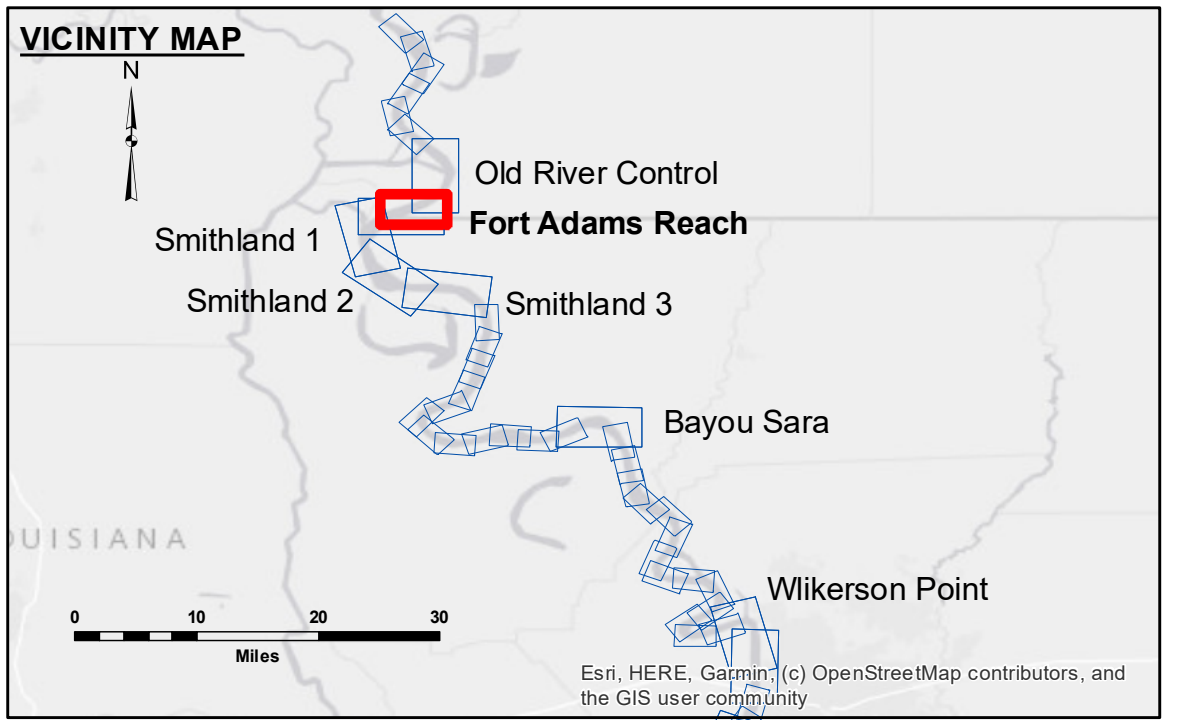

**LEGEND**

- - - Federal Navigation Channel	○ Cable Area	■ Shoaling Area	■ 0' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ 0' to -5'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -5' to -9'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	□ -9' and below
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	

LWRP: 14.1  
 Gage Reading: KL:41.8 RR:38.8 USED:40.00 NAVD  
 Sea Conditions: CALM  
 Vessel Name: OB-189  
 Survey Type: CONDITION  
 Sounding Frequency\*\*\*: HIGH

Vertical Datum: Soundings are shown in feet and indicate depths below Low Water Reference Plane 2007 (NAVD).  
 Distances on the Mississippi River, above and below Head of Passes are shown at 1 mile intervals.  
 The location of navigation aids are base on and provided by the U.S. Coast Guard and USACE crew.  
 2015 Aerial Photography data source: NAIP, USDA-FSA-APFO Aerial Photography Field Office.  
 Reference is USACE IENC U35LM236.  
 \*\*\* Shoalest Sounding per Quarter per Reach.  
 \*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

**Sheet Reference Number**  
**8 of 39**