


**DISCLAIMER**

The information depicted on this map represents the results of a survey conducted by the United States Army Corps of Engineers. The data was collected and processed in accordance with the standards and specifications of the National Geodetic Survey (NGS) and the National Hydrographic Survey (NHS). The user is responsible for the accuracy, completeness, and reliability of the data for their intended purpose. The Corps of Engineers does not warrant the accuracy or reliability of the data for any purpose other than that for which it was collected. The Corps of Engineers does not accept any responsibility for changes in the hydrographic conditions when developed after the date of the survey. The Corps of Engineers does not accept any responsibility for the use of the data for purposes other than those for which it was collected. The Corps of Engineers does not accept any responsibility for the use of the data for purposes other than those for which it was collected.

Submitted:	Surveyed By:	Checked By:
Recommended:	R/LAND/MOLLERE	AD/JH
Approved:	Chief, Survey Section	Chief, Waterways Maintenance Section

**OLD RIVER LOCK VICINITY**  
**OLD RIVER LOCK TAILBAY**  
**OR\_02\_LTB\_20230710\_CS**  
**10 July 2023**

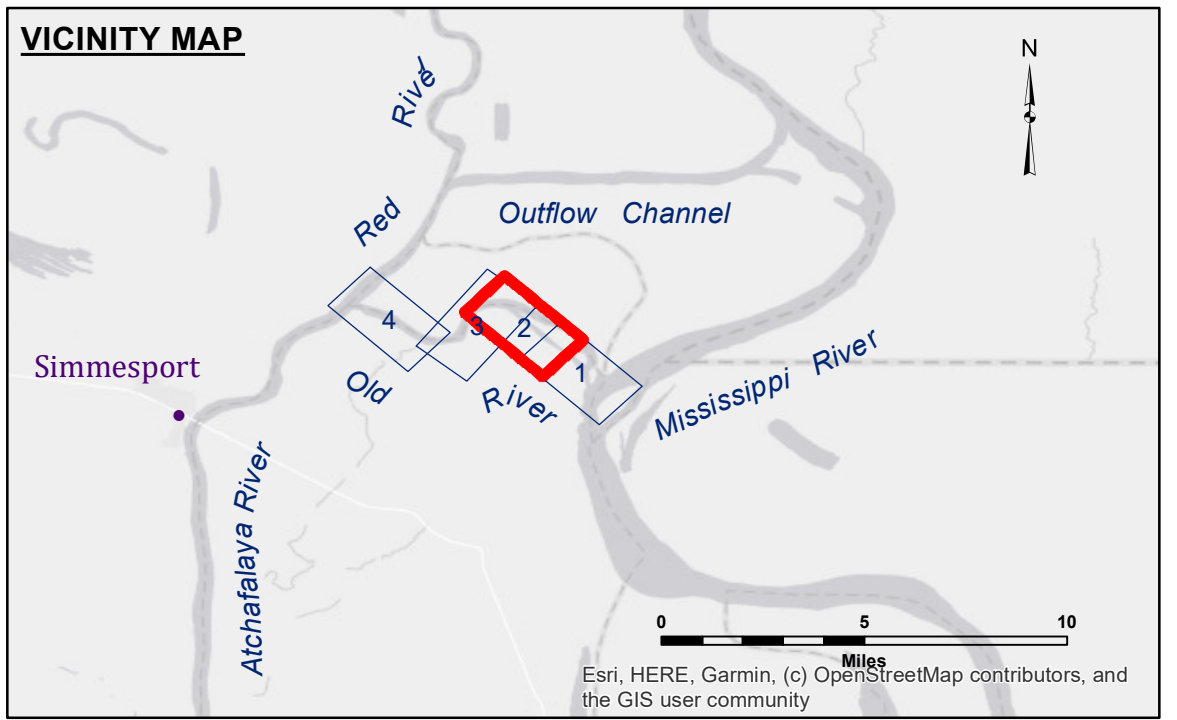

**LEGEND**

--- Federal Navigation Channel	○ Cable Area	□ Borrow Area	■ -8' and above
— Federal Navigation Center Line	□ Placement Area	● Shoalest Sounding**	■ -8' to -10'
— As-built Pipeline/Cable	□ Anchorage Area	★ Beacon, General	■ -10' to -12'
..... Unconfirmed Pipeline/Cable	⊗ Obstruction Point	◆ Red Navigation Buoy	■ -12' and below
— Project Depth Contour	⚓ Wrecks-Submerged	◆ Green Navigation Buoy	

**NOTES:**

Horizontal Coordinate System:  
 North American Datum of 1983 (NAD83), projected to the State Plane  
 Coordinate System (SPCS), Louisiana South Zone. Distance units in U.S. Survey Feet.

Vertical Datum:  
 Soundings are shown in feet and indicate depths below National Geodetic Datum of 1929 (NGVD29).

The location of navigation aids are based on and provided by the U.S. Coast Guard. Positions of navigation aids shown may also have been surveyed in the field by USACE.

2015 Aerial Photography data source: NAIP, 1998 DOQQ imagery shown in green from USGS.

Reference is N.O.A.A. Navigation Chart No. 11354.

\*\* Shoalest Sounding per Quarter per Reach.

\*\*\* High frequency (200 kHz) survey data represents the first signal return at a sounding location and will include suspended solids, known as "fluff", if present. Low frequency (20 kHz) survey data normally penetrates through this "fluff" layer to depict elevations of consolidated bottom material. Low frequency accuracies may vary depending on channel conditions and fathometer settings.

Gage Reading: ORL TAILBAY: 8.20 NGVD  
 Sea Conditions: CALM  
 Vessel Name: OB-167  
 Survey Type: CS  
 Sounding Frequency\*\*\*: HIGH

Scale: 0 to 1,500 Feet